

S102S11/S102S12 S202S11/S202S12

SIP Type SSR with Snubber Circuit and Mousing Capability for External Heat Sink

■ Features

1. High radiation resin mold package
2. Built-in snubber circuit
3. Built-in zero-cross circuit
(S102S12/S202S12)
4. High repetitive peak OFF-state voltage
S102S11/S102S12 $V_{DRM} : 400V$
S202S11/S202S12 $V_{DRM} : 600V$
5. RMS ON-state current
 $I_T : \text{MAX. } 8A_{rms}$ at $T_c \leq 88^\circ C$
(With heat sink)
6. Isolation voltage between input and output
($V_{iso} : 4000V_{rms}$)
7. Recognized by UL, file No. E94758
Approved by CSA, No. LR63705

■ Applications


1. Automatic vending machines
2. Amusement equipment
3. Programmable controllers

■ Model line-ups

	For 100V lines	For 200V lines
Built-in snubber circuit	S102S11	S202S11
Built-in snubber circuit and zero-cross circuit	S102S12	S202S12

■ Outline Dimensions

(Unit : mm)

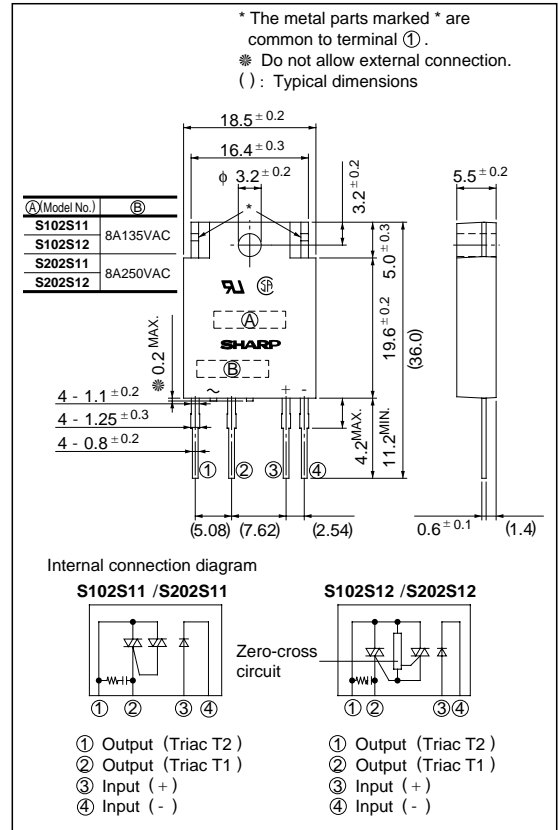

Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit	
Input	Forward current	I _F	50	mA	
	Reverse voltage	V _R	6	V	
Output	RMS ON-state current	I _T	*48	A _{rms}	
	*1 Peak one cycle surge current	I _{surge}	80	A	
	Repetitive peak-OFF state voltage	S102S11/S102S12	V _{DRM}	400	V
		S202S11/S202S12		600	
	Non-repetitive peak-OFF state voltage	S102S11/S102S12	V _{DSM}	400	V
		S202S11/S202S12		600	
Critical rate of rise of ON-state current		dI _T /dt	50	A/μs	
*2 Isolation voltage		V _{iso}	4 000	V _{rms}	
Operating temperature		T _{opr}	- 20 to + 80	°C	
Storage temperature		T _{stg}	- 30 to + 100	°C	
*3 Soldering temperature		T _{sol}	260	°C	
Load supply voltage		S102S11/S102S12	135	V _{rms}	
		S202S11/S202S12	250		

*1 50Hz sine wave, start at T_j = 25°C

*2 60Hz AC for 1 minute, RH= 40 to 60%, Apply voltages between input and output, by the dielectric withstand voltage tester with zero-cross circuit. (Input and output shall be shorted respectively).

(Note) When the isolation voltage is necessary at using external heat sink, please use the insulation sheet.

*3 For 10 seconds

*4 T_c ≤ 88°C

Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V	
	Reverse current	I _R	V _R = 3V	-	-	10 ⁻⁴	A	
Output	ON-state voltage	V _T	I _T = 2Arms	-	-	1.5	V _{rms}	
	Minimum Operating current	I _{op}	V _{out} = 120V _{rms}	-	-	50	mA _{rms}	
			V _{out} = 240V _{rms}					
	Open circuit leak current	I _{leak}	V _{out} = 120V _{rms}	-	-	5	mA _{rms}	
			V _{out} = 240V _{rms}					
	Critical rate of rise of OFF-state voltage		dV/dt	V _D = 2/3V _{DRM}	30	-	-	V/μs
	Critical rate of rise of Commutating OFF-state voltage		(dV/dt) _C	T _j = 125°C dI _T /dt = -4.0A/ms, *5	5	-	-	V/μs
Zero-cross voltage	S102S12/S202S12	V _{OX}	I _F = 8mA	-	-	35	V	
Transfer characteristics	Minimum trigger current	I _{FT}	V _D = 12V, R _L = 30Ω	-	-	8	mA	
			V _D = 6V, R _L = 30Ω	-	-	8	mA	
	Isolation resistance		R _{ISO}	DC500V, RH = 40 to 60%	10 ¹⁰	-	-	Ω
	Turn-on time	t _{on}	AC60Hz	-	-	1	ms	
				-	-	9.3	ms	
Turn-off time		t _{off}	AC60Hz	-	-	9.3	ms	
Thermal resistance (Between junction and case)		R _{th(j-c)}	-	-	4.0	-	°C/W	
Thermal resistance (Between junction and ambience)		R _{th(j-a)}	-	-	40	-	°C/W	

*5 **S102S11/S102S12**: V_D = 400V **S202S11/S202S12**: V_D = 600V

Fig. 1 RMS ON-state Current vs. Case Temperature

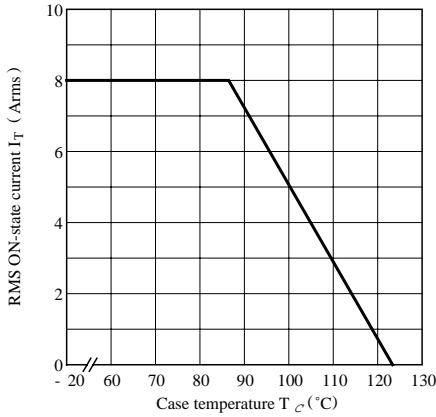


Fig. 2 RMS ON-state Current vs. Ambient Temperature

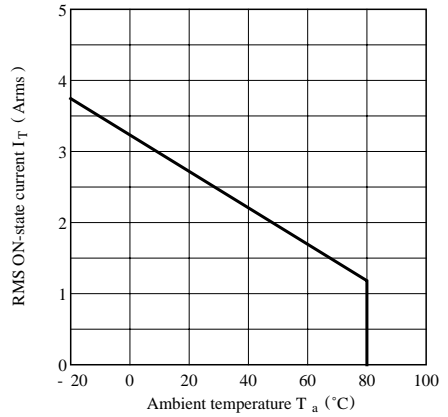


Fig. 3 Forward Current vs. Forward Voltage (Typical Value)

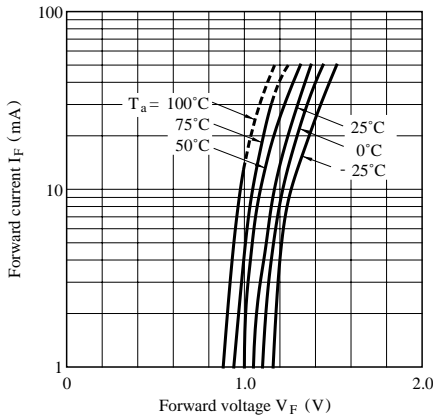


Fig. 4 Surge Current vs. Power-on Cycle

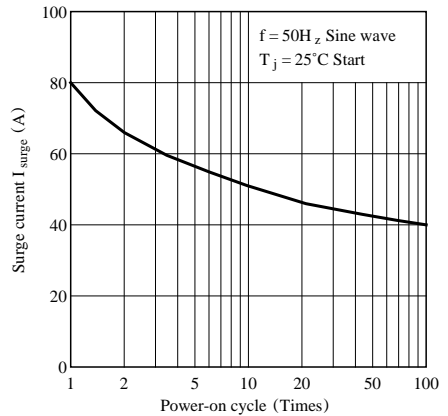


Fig. 5 Maximum ON-state Power Dissipation vs. RMS ON-state Current (Typical Value)

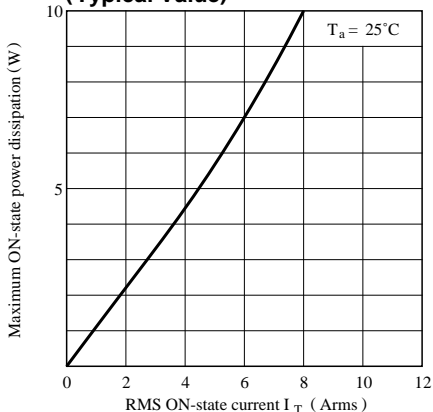


Fig. 6 Minimum Trigger Current vs. Ambient Temperature (Typical Value) (S102S11/S202S11)

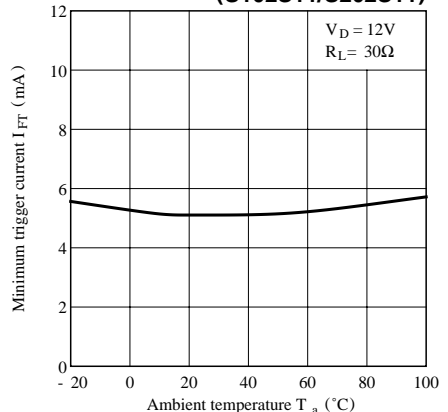


Fig. 7 Minimum Trigger Current vs. Ambient Temperature (Typical Value) (S102S12/ S202S12)

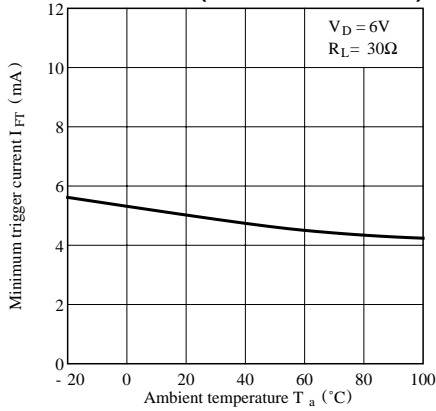


Fig. 8 Open Circuit Leak Current vs. Supply Voltage (Typical Value) (S102S11/S102S12)


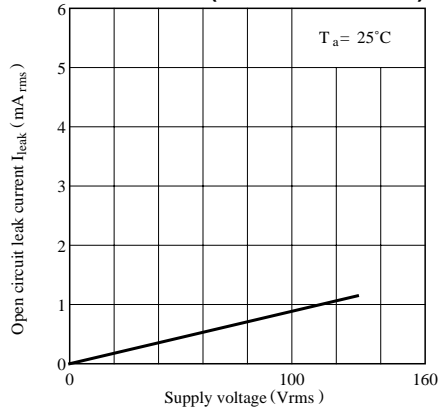


Fig. 9 Open Circuit Leak Current vs. Supply Voltage (Typical Value) (S202S11/S202S12)

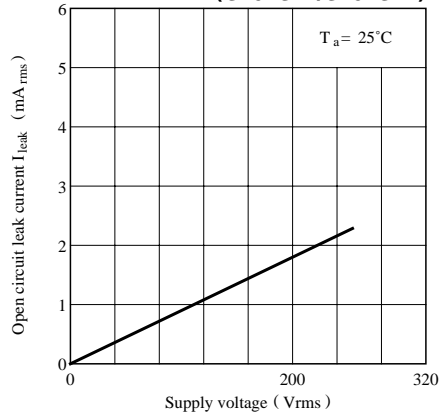

● Please refer to the chapter “Precautions for Use.”

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.