
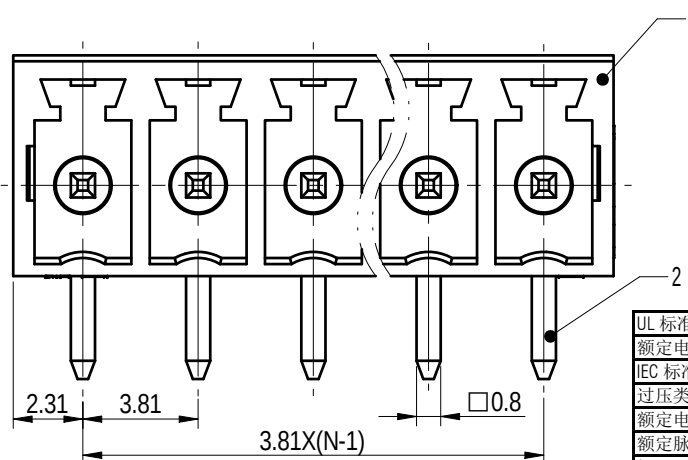
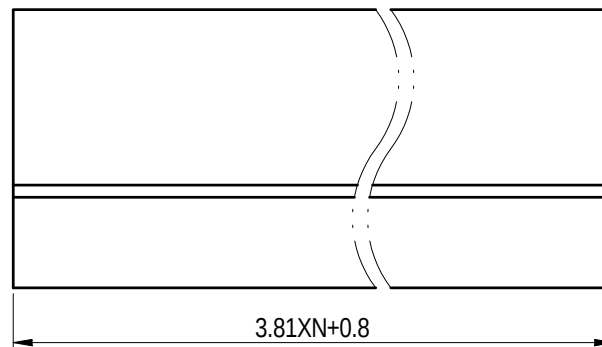
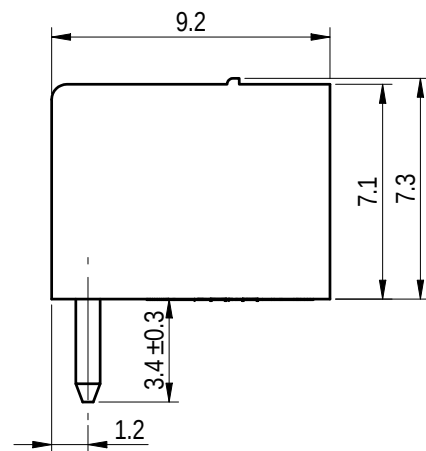


$$3.81xN+0.8$$


未注公差/General tolerances(mm)													 0.1/10 	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20		±2.50

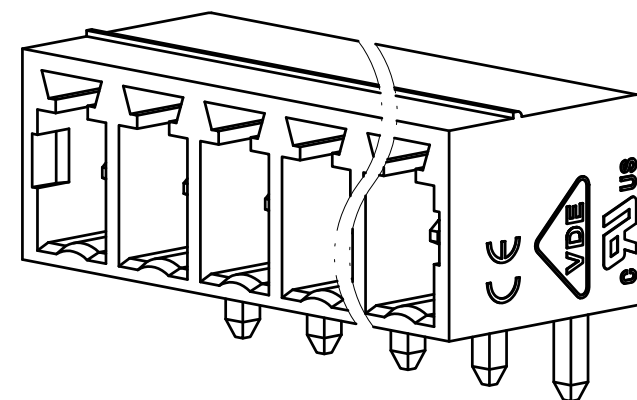

The A&Z(H) in the name means: A(H) and Z(H).

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	2.5
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



APPD:	兰春华	2023.03.07
CHKD:	龚耀志	2023.03.07
DRFT:	方哲盛	2023.03.07

MATERIAL:	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量

NAME _____

15EDGRC-3.81-XXP-1Y-13A&Z (H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200019879	CUSTOMER DRAWING	已发布	4:1	1/1

00			方哲盛	2023.03.07
REV	ECN	DESCRIPTION	DRFT	DATE