

100W, wide input voltage, isolated & regulated single output DC-DC converter



Patent Protection RoHS

FEATURES

- Ultra wide input voltage range (4:1)
- High efficiency up to 94%
- Isolation voltage: 2.25K VDC
- Input under-voltage protection, output short circuit, over-current, over-voltage, over-temperature protection
- Operating temperature range: -40°C to +85°C
- Five-sided metal shielding package
- International standard pin-out: 1/4 brick

URF_QB -100W(F)R3 series are isolated 100W DC-DC products with 4:1 input voltage. They feature efficiency up to 94%, 2250VDC isolation, operating temperature of -40°C to +85°C, Input under-voltage protection, output short circuit protection, over-current protection, over-voltage protection, over-temperature protection and EMI meets CISPR22/EN55022 CLASS B, which make them widely applied in battery power supplies, industrial control, electricity, instruments, railway, communication fields.

Selection Guide

Part No. ^①	Input Voltage (VDC)		Output		Efficiency (%Min./Typ.) @ Full Load		Max. Capacitive Load(μF)
	Nominal (Range)	Max. ^②	Output Voltage(VDC)	Output Current (A)(Max.)	Vin=24V	Vin=48V	
URF4805QB-100W(F) R3	48 (18-75)	80	5	20	91/93	89/91	6000
URF4812QB-100W(F) R3			12	8.3	91/93	90/92	2000
URF4815QB-100W(F) R3			15	6.7	92/94	91/93	2000
URF4824QB-100W(F) R3			24	4.2	91/93	90/92	1000
URF4848QB-100W(F) R3			48	2.1	91/93	90/92	470

Note:
 ① "F" means product with aluminium bottom case;
 ② Exceeding the maximum input voltage may cause permanent damage.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	Nominal input voltage	--	2265/50	2341/80	mA
Reflected Ripple Current	Nominal input voltage	--	30	--	
Surge Voltage (1sec. max.)		-0.7	--	90	VDC
Start-up Threshold Voltage		--	--	18	
Input Under-voltage Protection	URF4805QB-100W(F)R3、URF4815QB-100W(F) R3 Others	16 15	16.5 15.5	-- --	
Input Filter		Pi filter			
Ctrl*	Module switch on	Ctrl open circuit or connected to TTL high level (3.5-12VDC)			
	Module switch off	Ctrl pin connected to GND or low level (0-1.2VDC)			
	Input current when switched off	--	2	10	mA
Hot Plug		Unavailable			

Note: * The voltage of Ctrl pin is relative to input pin GND.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			--	±1	±3	%
Line Regulation	Full load, the input voltage is from low to high		--	±0.2	±0.5	
Load Regulation	5%-100% load		--	±0.5	±0.75	
Transient Recovery Time	25% load step change		--	200	500	μs
Transient Response Deviation	25% load step change	5V output	--	±3	±7.5	%
		Others	--	±3	±5	
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Ripple & Noise*	20MHz bandwidth	12V/15V output	--	100	200	mVp-p
		Others	--	130	250	
Output Over-voltage Protection	Input voltage range		110	125	160	%Vo
Output Over-current Protection			110	125	190	%Io
Short-circuit Protection			Hiccup, Continuous, self-recovery			

Note: *Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output	With the test time of 1 minute and the leak current less than 5mA	2250	--	--	VDC
	Input-case		1500	--	--	
	Output-case		500	--	--	
Insulation Resistance	Input-output, insulation voltage 500VDC		1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V		--	2200	--	pF
Trim*			95	--	110	%Vo
Sense			--	--	105	
Operating Temperature			-40	--	+85	°C
Storage Temperature			-55	--	+125	
Over-temperature Protection			+95	+105	+115	
Pin Welding Resistance Temperature	Wave-soldering, 10 seconds		--	--	+260	
	Welding spot is 1.5mm away from the casing, 10 seconds		--	--	+300	
Storage Humidity	Non-condensing		5	--	95	%RH
Vibration			IEC/EN61373 car body 1 B mold			
Switching Frequency	PFM mode		--	250	--	KHz
MTBF	MIL-HDBK-217F@25°C		500	--	--	K hours

Note: *The URF4805QB-100W (F)R3 and URF4815QB-100W (F)R3, Trim and Sense function meet output up to 10%, Vin need exceed 20VDC.

Physical Specifications


Casing Material	Aluminum alloy case, Black flame-retardant and heat-resistant plastic bottom case (UL94 V-0)	
Dimension	URF48xxQB-100WR3	61.8*40.2*12.7 mm
	URF48xxQB-100WFR3	62.0*56.0*14.6 mm
Weight	URF48xxQB-100WR3	70g(Typ.)
	URF48xxQB-100WFR3	90g(Typ.)
Cooling method	Natural convection or Forced convection	

EMC Specifications


EMI	CE	CISPR22/EN55022, EN50121-3-2	CLASS A and CLASS B (see Fig. 2 for recommended circuit)	
	RE	CISPR22/EN55022, EN50121-3-2	CLASS A and CLASS B (see Fig. 2 for recommended circuit)	
EMS	ESD	IEC/EN61000-4-2, EN50121-3-2	Contact $\pm 6\text{KV}$ Air $\pm 8\text{KV}$	perf.Criteria B
	RS	IEC/EN61000-4-3, EN50121-3-2	20V/m	perf.Criteria A
	EFT	IEC/EN61000-4-4, EN50121-3-2	$\pm 2\text{KV}$ (see Fig. 2-1for recommended circuit)	perf.Criteria A
	Surge	EN50121-3-2	differential mode $\pm 1\text{KV}$, 1.2/50us, source impedance 42Ω (see Fig.2-1for recommended circuit)	perf.Criteria B
	CS	IEC/EN61000-4-6, EN50121-3-2	10 Vr.m.s	perf.Criteria A

Product Characteristic Curve


URF4805QB-100WR3 Temperature Derating Curves

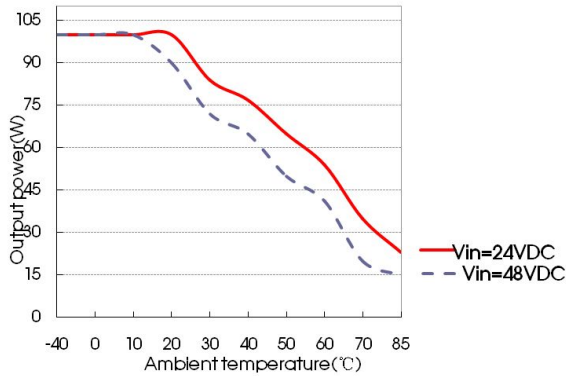


URF4805QB-100WFR3 Temperature Derating Curves

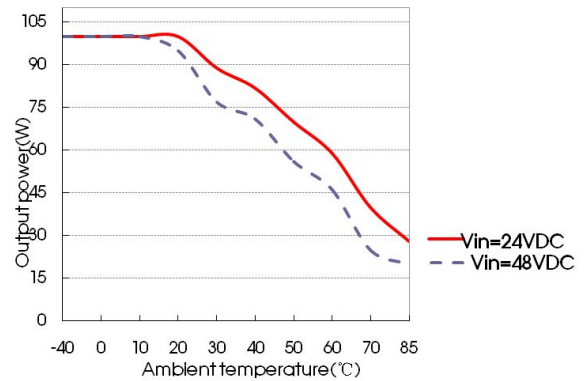

URF4812/15/24/48QB-100WR3 Temperature Derating Curves

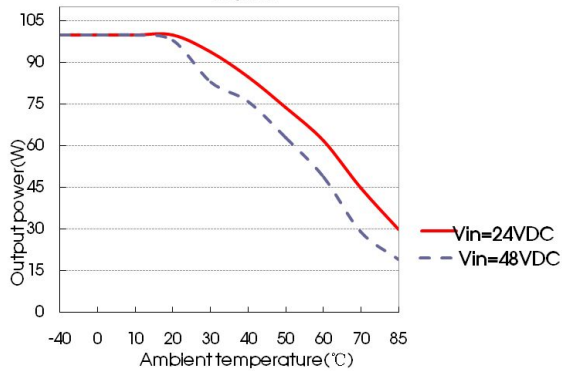


URF4812/15/24/48QB-100WFR3 Temperature Derating Curves

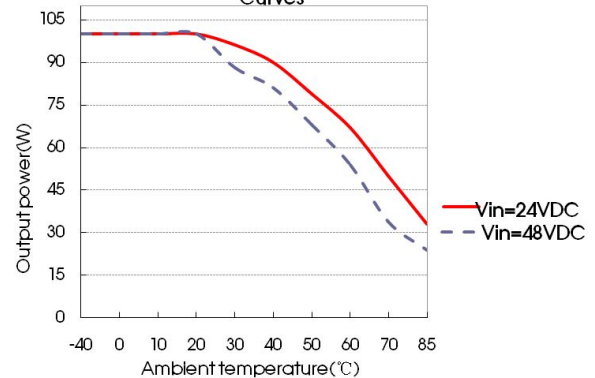

Sense of application and precautions


1. When not using remote sense

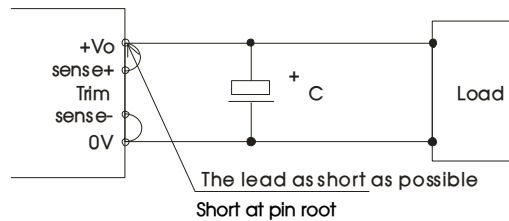

Notes:

- 1) When not using remote sense, make sure +Vo and Sense + are shorted, and that 0V and Sense- are shorted as well;
- 2) Keep the tracks between +Vo and Sense +, 0V and Sense- as short as possible. and close to the terminal. Avoid a looping track. If noise interferes the loop, the operation of the power module will become unstable.

2. When Remote Sense is used

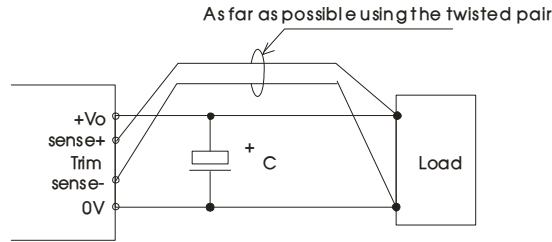

Notes:

1. Using remote sense with long wires may cause output voltage to become unstable. Consult us if long sensing wiring is necessary.
2. Sense tracks or wires should be as short as possible. If using wires, it should not use twisted-pair or shielded wires.
3. Please use wide PCB tracks or a thick wires between the power supply module and the load, the line voltage drop should be kept less than 0.3V. Make sure the power supply module's output voltage remains within the specified range.
4. The impedance of wires may cause the output voltage oscillation or a greater ripple, please take adequate assessments before using.

Design Reference

1. Typical application

If not using Mornsun's recommended circuit, please ensure an 220 μ F electrolytic capacitors in parallel with the input, which used to suppress the surge voltage come from the input terminal.

All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 1) before delivery.

If it is required to further reduce input&output ripple, properly increase the input & output of additional capacitors Cin and Cout or select capacitors of low equivalent impedance, provided that the capacitance is no larger than the max. capacitive load of the product.



Fig.1

Vout(VDC)	Fuse	Cin	Cout
5	10A, slow blow	220 μ F	470 μ F
12/15			220 μ F
24			100 μ F
48			100 μ F

2. EMC solution-module recommended circuit


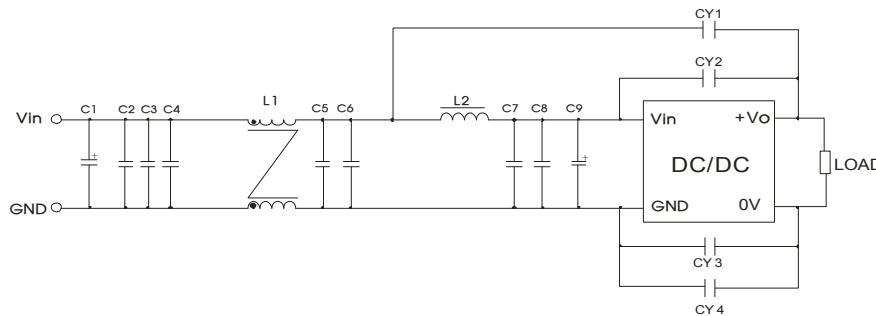


Fig. 2

CLASS A device number	CLASS B device number	Device parameter	Device function
	C1	150 μ F electrolytic capacitor	Meet pulse group and surge
	C9	47 μ F electrolytic capacitor	
	C1	150 μ F electrolytic capacitor	Meet conducted emission and radiated emission
	C9	47 μ F electrolytic capacitor	
	C2, C3, C4, C5, C6, C7, C8	2.2 μ F ceramic capacitor	
	L1	1.0mH common mode inductor	
	L2	1.5 μ H inductance	
CY3	CY1, CY2, CY3, CY4	1nF Y1 safety capacitor	

3. Application of Trim and calculation of Trim resistance

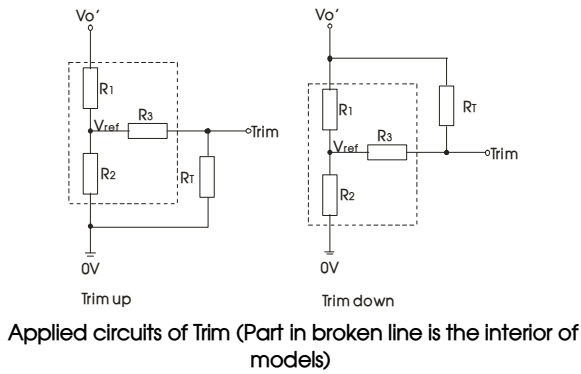

Calculation formula of Trim resistance:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \quad \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \quad \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$

R_T is Trim resistance, α is a self-defined parameter, with no real meaning. $V_{o'}$ for the actual needs of the up or down regulated voltage


Vout(VDC)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
5	3.036	3	10	2.5
12	11.00	2.87	15	2.5
15	14.03	2.8	15	2.5
24	24.872	2.87	15	2.5
48	53.017	2.913	15	2.5

When the Trim function with down regulated is used, If the R_T resistor is too low or "Trim" is short with "+Vo", the output voltage $V_{o'}$ would be lower than $0.9V_{o'}$, which may cause the product to be irreversibly damaged.

- It is not allowed to connect modules output in parallel to enlarge the power
- For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout (URF48xxQB-100WR3)


THIRD ANGLE PROJECTION

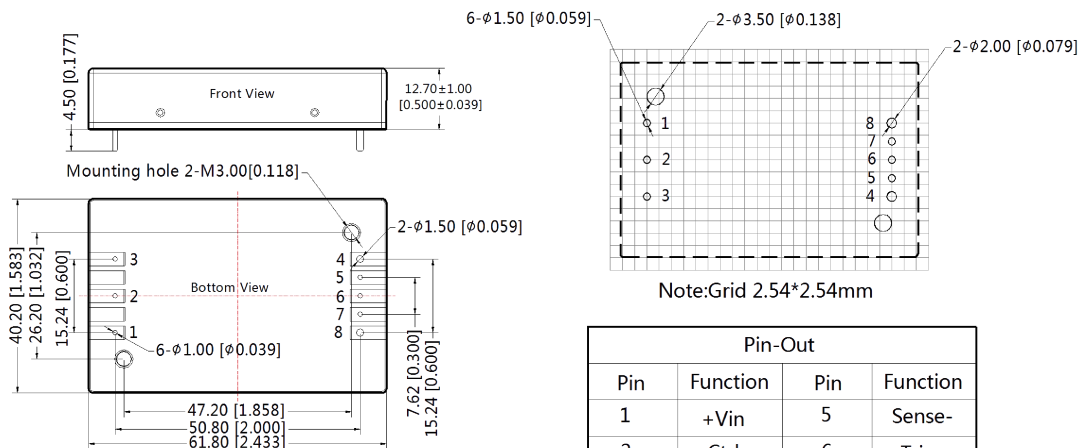

Pin-Out			
Pin	Function	Pin	Function
1	+Vin	5	Sense-
2	Ctrl	6	Trim
3	-Vin	7	Sense+
4	0V	8	+Vo

Note:
Unit: mm[inch]
Pin1, 2, 3, 5, 6, 7's diameter: 1.00[0.039]
Pin4, 8's diameter: 1.50[0.059]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N·m

Dimensions and Recommended Layout(URF48xxQB-100WFR3)

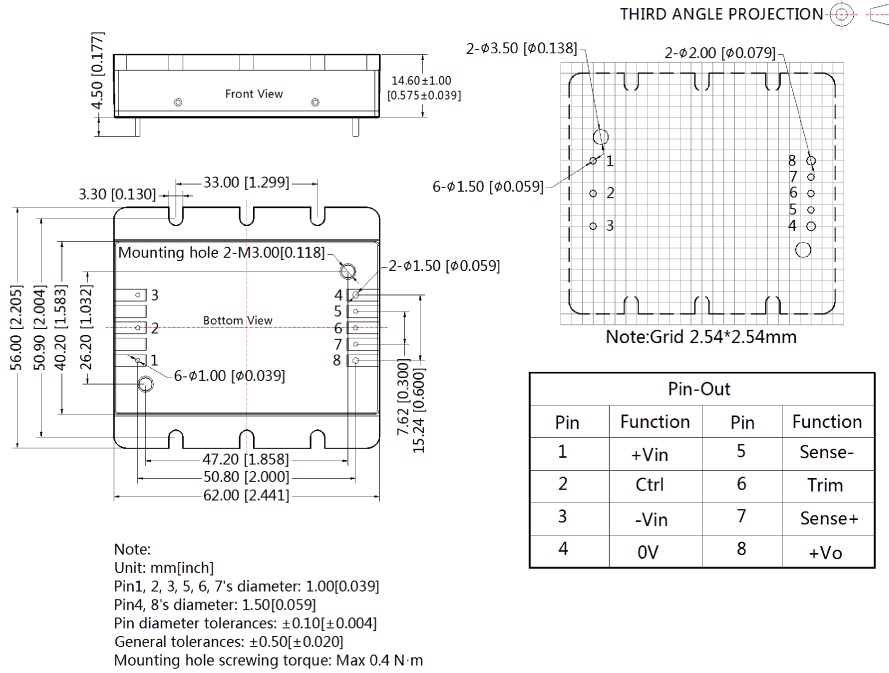

- Note:
1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58010113 (URF48xxQB-100WR3), 58200069 (URF48xxQB-100WFR3);
 2. The maximum capacitive load offered were tested at input voltage range and full load;
 3. Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH when inputting nominal voltage and outputting rated load;
 4. All index testing methods in this datasheet are based on our Company's corporate standards;
 5. We can provide product customization service and match filter module;
 6. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn