



—3296P—

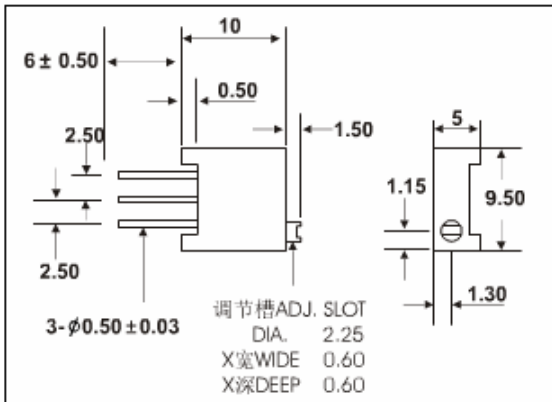

3296P

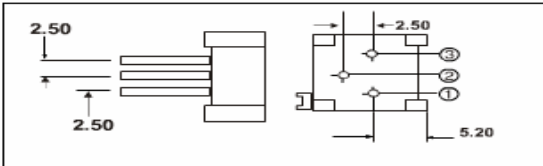

电气特性

标称阻值范围.....50Ω ~ 2MΩ
阻值允许偏差.....±10 %
终端电阻.....≤1 %R或10Ω
接触电阻变化.....CRV≤3 %或5Ω
绝缘电阻.....R1≥1 GΩ(100Vac)
耐电压.....640Vac
有效行程.....28 turns nom

环境特性


额定功率.....0.5W@70°C, 0W@125°C
温度范围.....-55°C ~ 125°C
温度系数.....±250ppm/°C
温度变化.....-55°C, 30min, +125°C
.....30min循环5次5cycles
.....ΔR≤5%R, Δ(Uab/Uac)≤5%
振动.....10 ~ 500Hz, 0.75mm, 6h,
.....ΔR≤5%R, Δ(Uab/Uac)≤7.5%

碰撞.....390m/s², 4000cycles, ΔR≤5%R
70°C耐久性.....0.5W@70°C
.....1000h, ΔR≤10%R, CRV≤3% or 5Ω
机械寿命.....200周
.....ΔR≤10%R, CRV≤3% or 5Ω

物理特性

起动力矩.....≤35mN·m

订购方法

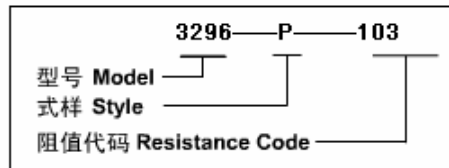

阻值代码表

Resistance(Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

