

# 36JX20K/3650-1230 PM DC SPUR GEARMOTOR


## MOTOR TECHNICAL DATA

MOTOR TYPE	RATED VOLTAGE (VDC)	NO-LOAD SPEED (r/min)	NO-LOAD CURRENT (mA)	RATED SPEED (r/min)	RATED TORQUE (mN.m)	OUTPUT POWER (W)	RATED CURRENT (mA)	STALL TORQUE (mN.m)	STALL CURRENT (A)
3650-1230	12	3000	220	2500	10	2.5	400	60	1.6

## 36JX20K/3650-1230 GEAR MOTOR TECHNICAL DATA

REDUCTION RATIO	1:369
NUMBER OF GEAR TRAINS	4
Length(L) mm	48.9
NO-LOAD SPEED r/min	8.1
RATED SPEED r/min	6.8
RATED TORQUE N.m	2.0
Max. permissible load in a short time N.m	6

## DIMENSION

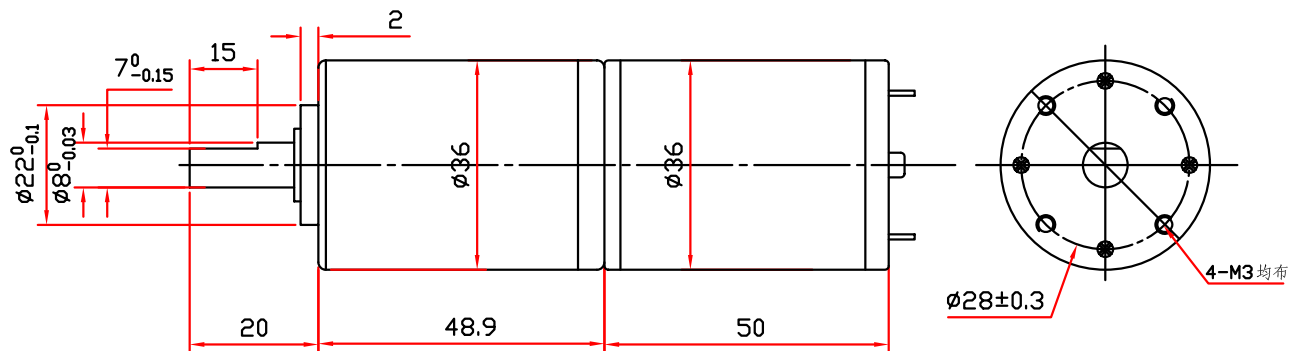

DESIGN	DATE	P/N.
REV	ECN NO.	DESCRIPTION
DRN	APP'D	DATE
CHECK		TITLE 整机图
APPD		USED ON 36JX20K-3650-1230 1:369
SCALE	OF	DWG NO.
SHEET	OF	REV
FIRST ANGLE PROJECTION		FULLING MOTOR
UNLESS OTHERWISE SPECIFIED TOLERANCES:		
DECIMALS: .x ±0.5		
ANGULAR: ±0°30'		
.xx ±0.25		
.xxx ±0.1		
UNIT: mm		
DO NOT SCALE DRAWING		