

| 記錄<br>RECORD | ECN NO. | 日期<br>DATE | 修改<br>DRAW | 核准<br>APPROVE |
|--------------|---------|------------|------------|---------------|
|              |         |            |            |               |
|              |         |            |            |               |
|              |         |            |            |               |

FEATURES:

1 Electrical Test:

- A. Safety Voltage/Current Rating 150V ac, at 1.5A.  
B. Dielectric with standing 1000V/DC/min, <0.5A.  
C. Insulation Resistance:>500MΩ, 1000V./min  
D. Contact Resistance:<20MΩ






2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.  
B. Durability:750 mating cycles.  
3 Operation Temperature:-40℃~+85℃.  
4. Environmental compliance  
A. the products are compliant with the RoHS, and REACH ETC.  
5. Safety standards:UL E239590

特征:

- 1 電氣特性:  
A. 额定电压150伏特AC, 额定电流1.5A  
B. 耐電壓測試: 小于0.5安培1000伏特DC/一分鐘.  
C. 絕緣抗陰: 1000伏特DC/一分鐘, 大于500百萬歐姆  
D. 按觸陰坑: 不大于20mΩ (毫歐姆)  
2 機械特性:  
A. 拉力測試-電纜至插座張力強度至少一分鐘20磅 (89N)  
B. 耐力測試-拔插測試750次以上.  
3 使用溫度範圍: -40℃~+85℃  
4 環保符合性:  
A. 產品符合RoHS, REACH等環保規格.  
5 安全标准: UL E239590

注: 帶▲为重点尺寸控制

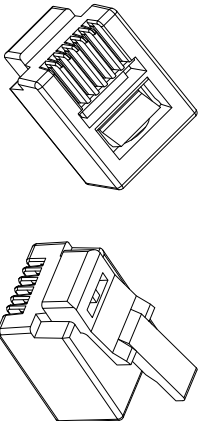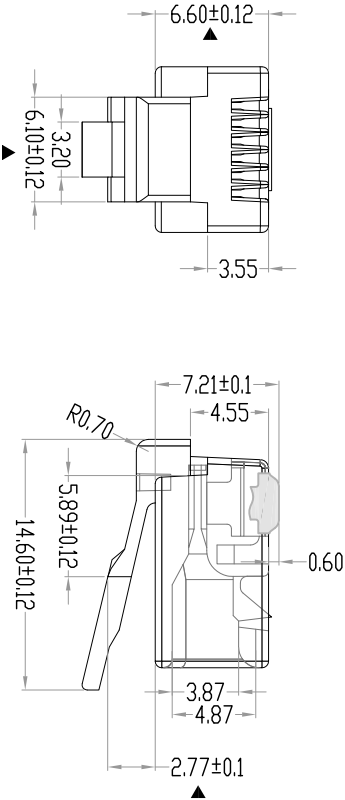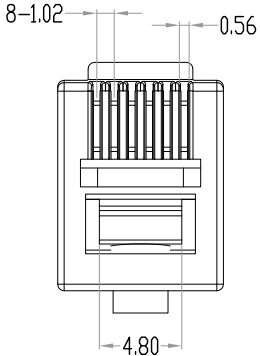

|         |         |         |         |         |     |     |
|---------|---------|---------|---------|---------|-----|-----|
| BLADE:  | 202     | 304     | 309     | 311     | 314 | 319 |
| Drawing |         |         |         |         |     |     |
| Mark    |         |         |         |         |     |     |
| BLADE:  | 203/204 | 209/210 | 307/308 | 312/313 |     |     |
| Drawing |         |         |         |         |     |     |
| Mark    |         |         |         |         |     |     |

|                                                                                                                                                                                                                      |                                                |                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------|
| <input type="checkbox"/> 屏蔽壳<br>Shell                                                                                                                                                                                | <input type="checkbox"/> 黄铜<br>Brass           | <input type="checkbox"/> 铁<br>Spec |
| Au: <input type="checkbox"/> g/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input type="checkbox"/> Ni <input type="checkbox"/> 80u"                                                                |                                                |                                    |
| 胶壳 PC(聚碳酸酯) <input type="checkbox"/> 94-V0 <input checked="" type="checkbox"/> 94-V2                                                                                                                                 |                                                |                                    |
| 金片 (PIN针) <input checked="" type="checkbox"/> 黄铜<br>Contacts Brass                                                                                                                                                   | <input type="checkbox"/> 磷铜<br>Phosphor copper |                                    |
| <input type="checkbox"/> g/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input type="checkbox"/> 6u" <input type="checkbox"/> 15u" <input type="checkbox"/> 30u" <input type="checkbox"/> 50u" OTHER |                                                |                                    |

|                                                                      |                                       |
|----------------------------------------------------------------------|---------------------------------------|
| <b>XLEP</b> ® 东莞市祥磊电子有限公司<br>DONG GUAN XIANGLEI ELECTRONICS CO., LTD |                                       |
| 品名规格<br>DESCRIPTION                                                  | 6P6C 圆孔-CJ模                           |
| 产品编号<br>PRODUCT NO                                                   | 01 66 001 U 2 CJ R *** *              |
| DIMENSION 1X mm(Inch)<br>TOLERANCE UNLESS<br>OTHERWISE SPECIFIED     | X* ±0.2<br>X.xx ±0.10<br>X.xxx ±0.050 |
| ANGLES                                                               | X° ±0°<br>.X° ±0.0°                   |
| 第三视角法<br>THIRD ANGLE PROJECTION                                      |                                       |
| 制图<br>DRAWN                                                          | 日期<br>DATE                            |
| 核对<br>CHECK                                                          | 日期<br>DATE                            |
| 批准<br>APPRO                                                          | 日期<br>DATE                            |
| 单位<br>UNIT                                                           | mm                                    |
| 比例<br>SCALE                                                          | 1:1                                   |
| 页次<br>SHEET                                                          | 1/1                                   |
| 版本<br>EDTT                                                           | A/0                                   |