
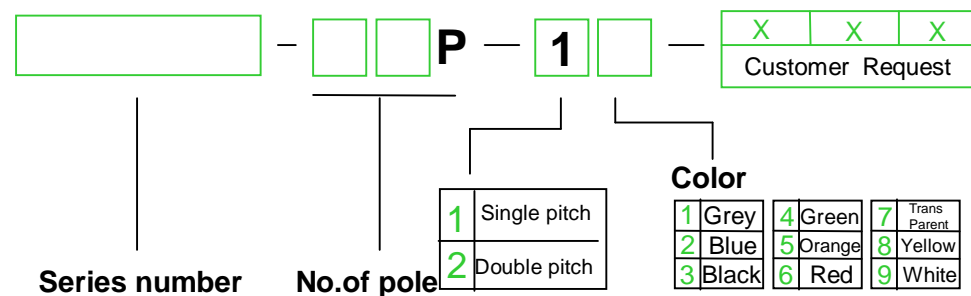


| | | |
|----------------------|---|------------------------|
| Approval |  | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 20A | 24A |
| Wire range | 22-12AWG | 0.2-2.5mm ² |
| Withstanding voltage | AC2500V/1Min | |
| Mechanical | | |
| Ambient temperature | -40°C ~ +105 °C | |
| Strip length | 9-11mm | |
| Dimensions | | |
| Pitch | 8.0mm (.315") | |
| Poles | 1P | |
| Material | | |
| Housing | PA66,UL94V-0 | |
| Pin header | Copper, Tin plated | |
| Wire guard | Stainless steel | |

HOW TO ORDER :



| | |
|---|---|
|  mm (INCH) |  DEGSON ELECTRONICS CO., LTD. |
|  THROANGLE PROJECTION | NAME DG222-8.0 |