




● 特点

1. 体积小且功率大
Small size and high power rating
2. 坚固结构, 稳定性高
Strong construction, high stability
3. 使用温度范围: -25°C — $+275^{\circ}\text{C}$
Operating temperature: -25°C — $+275^{\circ}\text{C}$
4. 供应有感线绕及无感线绕型式
Supply standard winding & non-inductive winding types



● 品名构成 Type designation

AH		100Ω	J (± 5%)		
形式 Style	工程抵抗値 Resistance		容許誤差値 Tolerance		
容許誤差値 Tolerance					
D	F	G	J	K	
±0.5%	±1%	±2%	±5%	±10%	

● 负载递减曲线 Power Derating curve

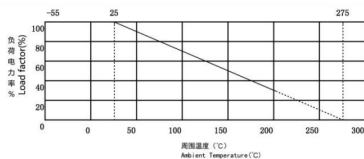

● 尺寸 Dimensions

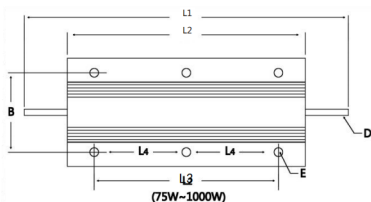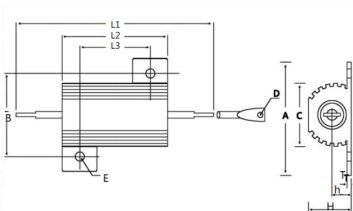

额定功率 Power Rating	尺寸(mm) Dimensions(mm)											
	L1±1	L2±1	L3±1	L4±1	A±1	B±1	C±1	D±0.3	E±0.3	H±1	h±1	T±1
AH-5W	60	15	11.5	0	17	13	9.5	0.6	2.2	8	4	1.6
AH-10W	65	20	14.5	0	23	16	11	0.7	3.5	10.5	5.2	2
AH-25W	49	27	19	0	28	20	16	2	3.5	15.5	7	2
AH-50W	70	50	39.5	0	28	21.5	16	2	3.5	15.5	7	2
AH-75W	90	70	39.5	0	28	21.5	16	2	3.5	15.5	7	2
AH-75W	100	66	36	0	48	37	27	4	5	26	13	3.5
AH-100W	130	98	71	35.5	48	37	27	4	5	26	13	3.5
AH-150W	170	136	110	55	48	37	27	4	5	26	13	3.5
AH-200W	190	155	126	63	48	37	27	4	5	26	13	3.5
AH-200W	127	92	66	33	72	58	46	6	6	43	22.5	5
AH-250W	147	112	86	43	72	58	46	6	6	43	22.5	5
AH-300W	160	128	105	52	72	58	46	6	6	43	22.5	5
AH-500W	230	200	175	87	72	58	46	6	6	43	22.5	5
AH-800W	280	250	222	110	72	58	46	6	6	43	22.5	5
AH-1000W	330	300	250	125	72	58	46	6	6	43	22.5	5

注: 100W—1000WD表示所用螺杆尺寸