

**Isolierkörpermaterial**

PBT, UL94V-0

**Kontaktmaterial**

Messing

**Kontaktfläche**

Ni, Au / Sn

**Kontaktwiderstand**

20mΩ max

**Isolationswiderstand**

1000MΩ min

**Strombelastbarkeit**

3A

**Betriebstemperatur**

-40°C - +105°C

**Betriebsspannung**

250V AC

**Prüfspannung**

1000V AC

**Verpackung**

Blisterverpackung

**Insulator material**

PBT, UL94V-0

**Contact material**

Brass

**Plating**

Ni, Au / Sn

**Contact resistance**

20mΩ max

**Insulation resistance**

1000MΩ min

**Current rating**

3A

**Operating temperature**

-40°C to +105°C

**Operating voltage**

250V AC




**Test voltage**

1000V AC


**Packing**

Tray packing

Dimensions			
No. of Contacts	A	B	C
10	31,90	10,16	21,90
14	36,98	15,24	26,98
16	39,52	17,78	29,52
20	44,60	22,86	34,60
26	52,22	30,48	42,22
34	62,38	40,64	52,38
40	70,00	48,26	60,00
50	82,70	60,96	72,70
60	95,40	73,66	85,40
64	100,48	78,74	90,48

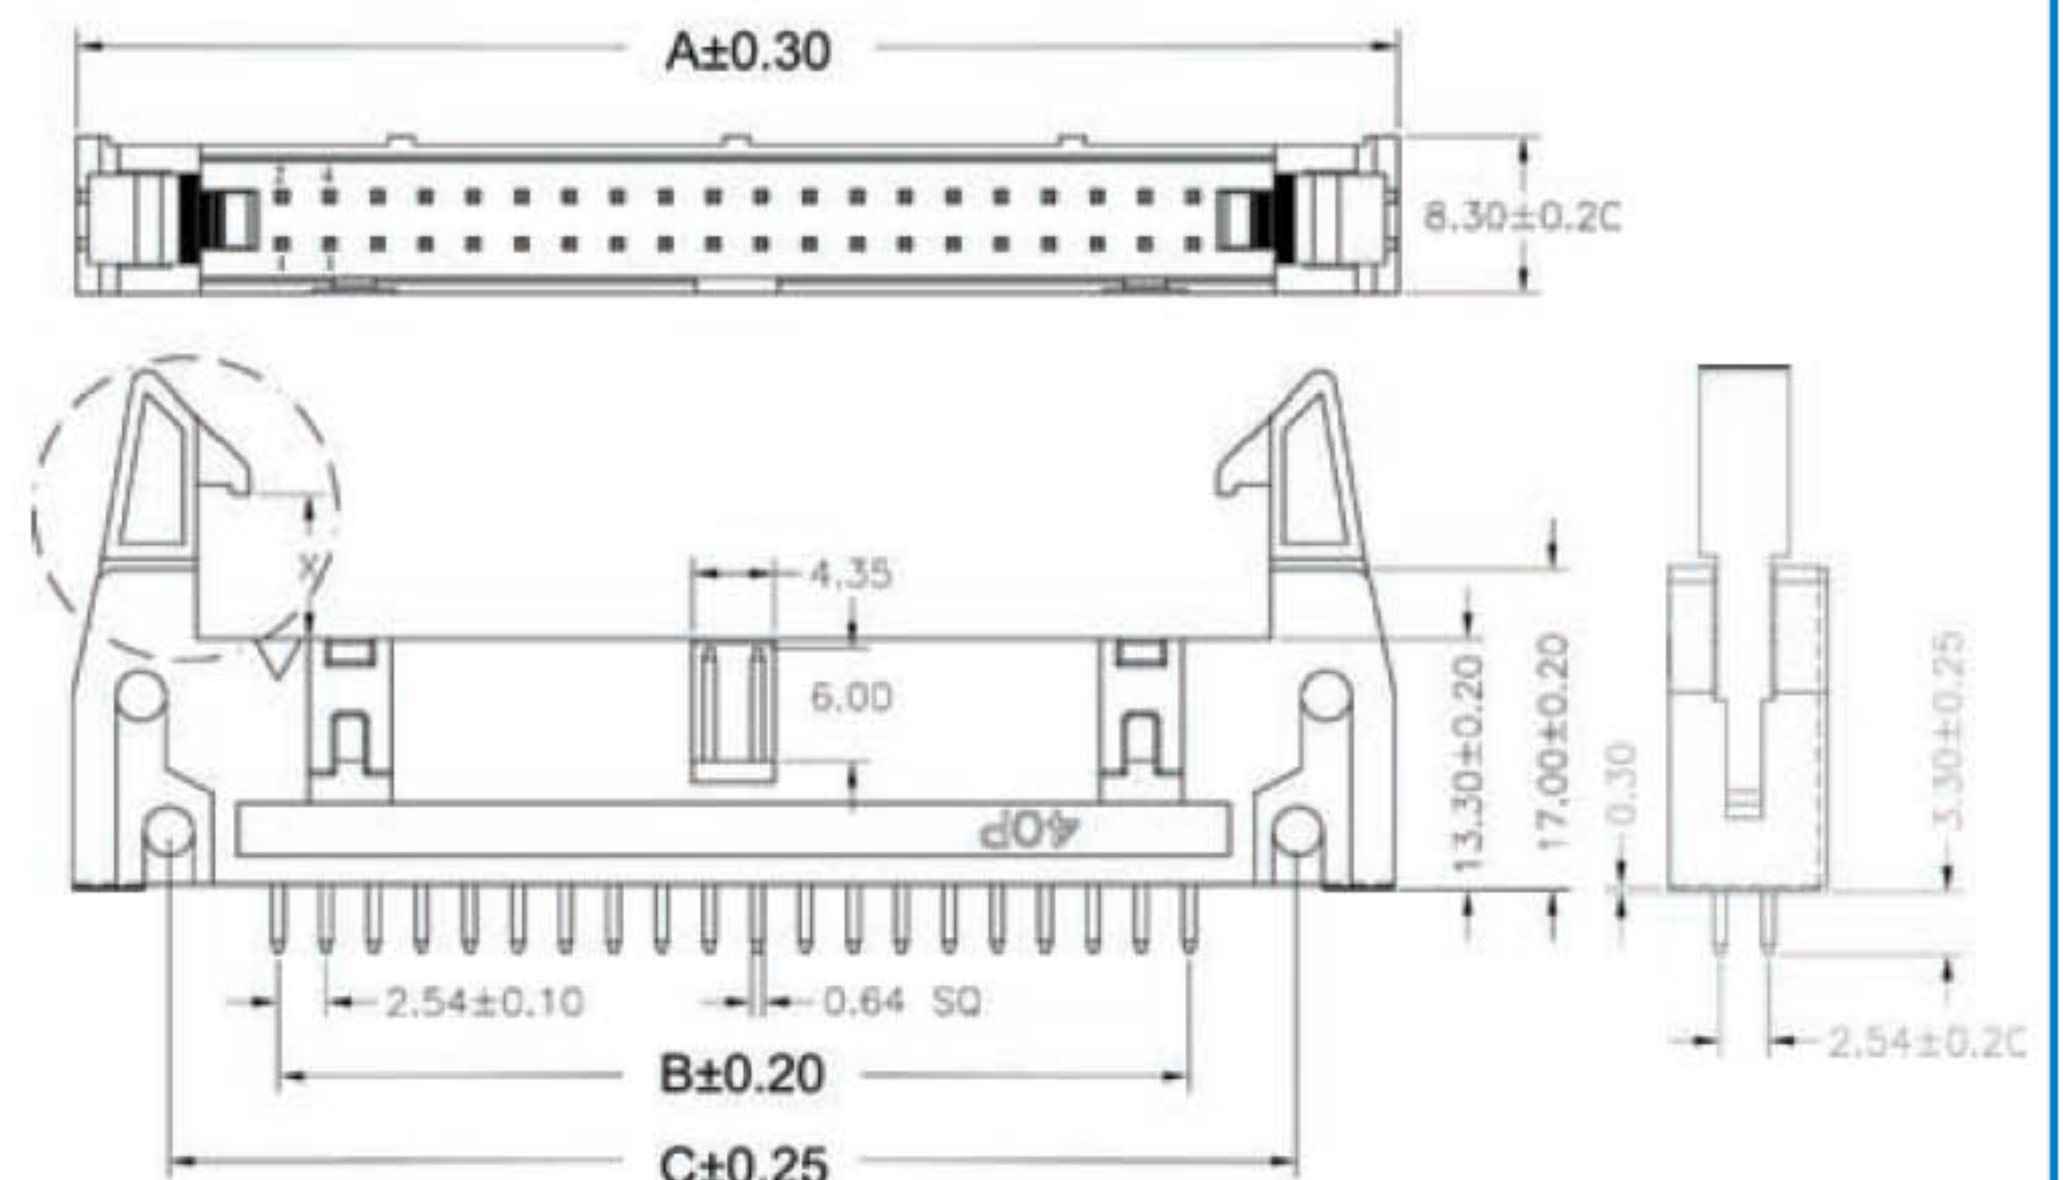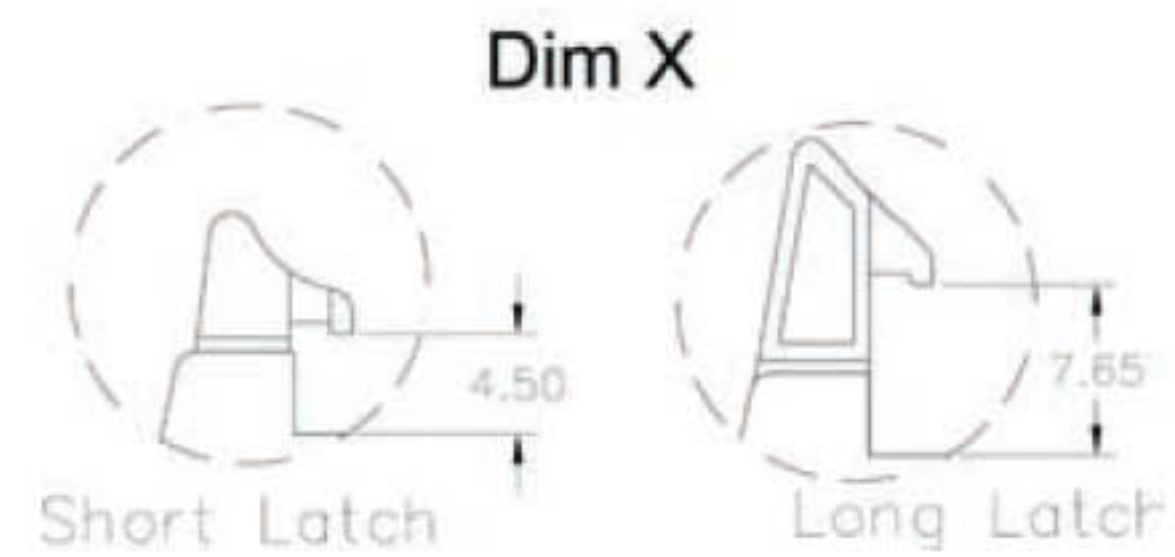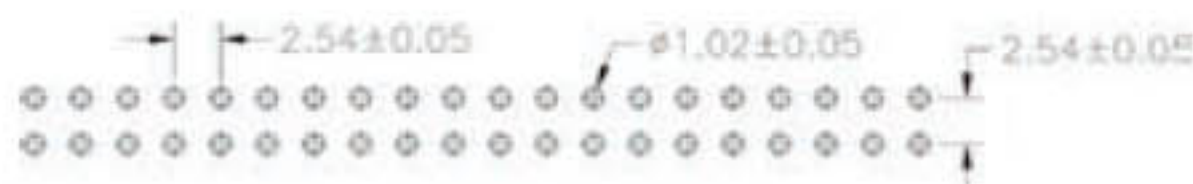

Bestellcode / Ordercode

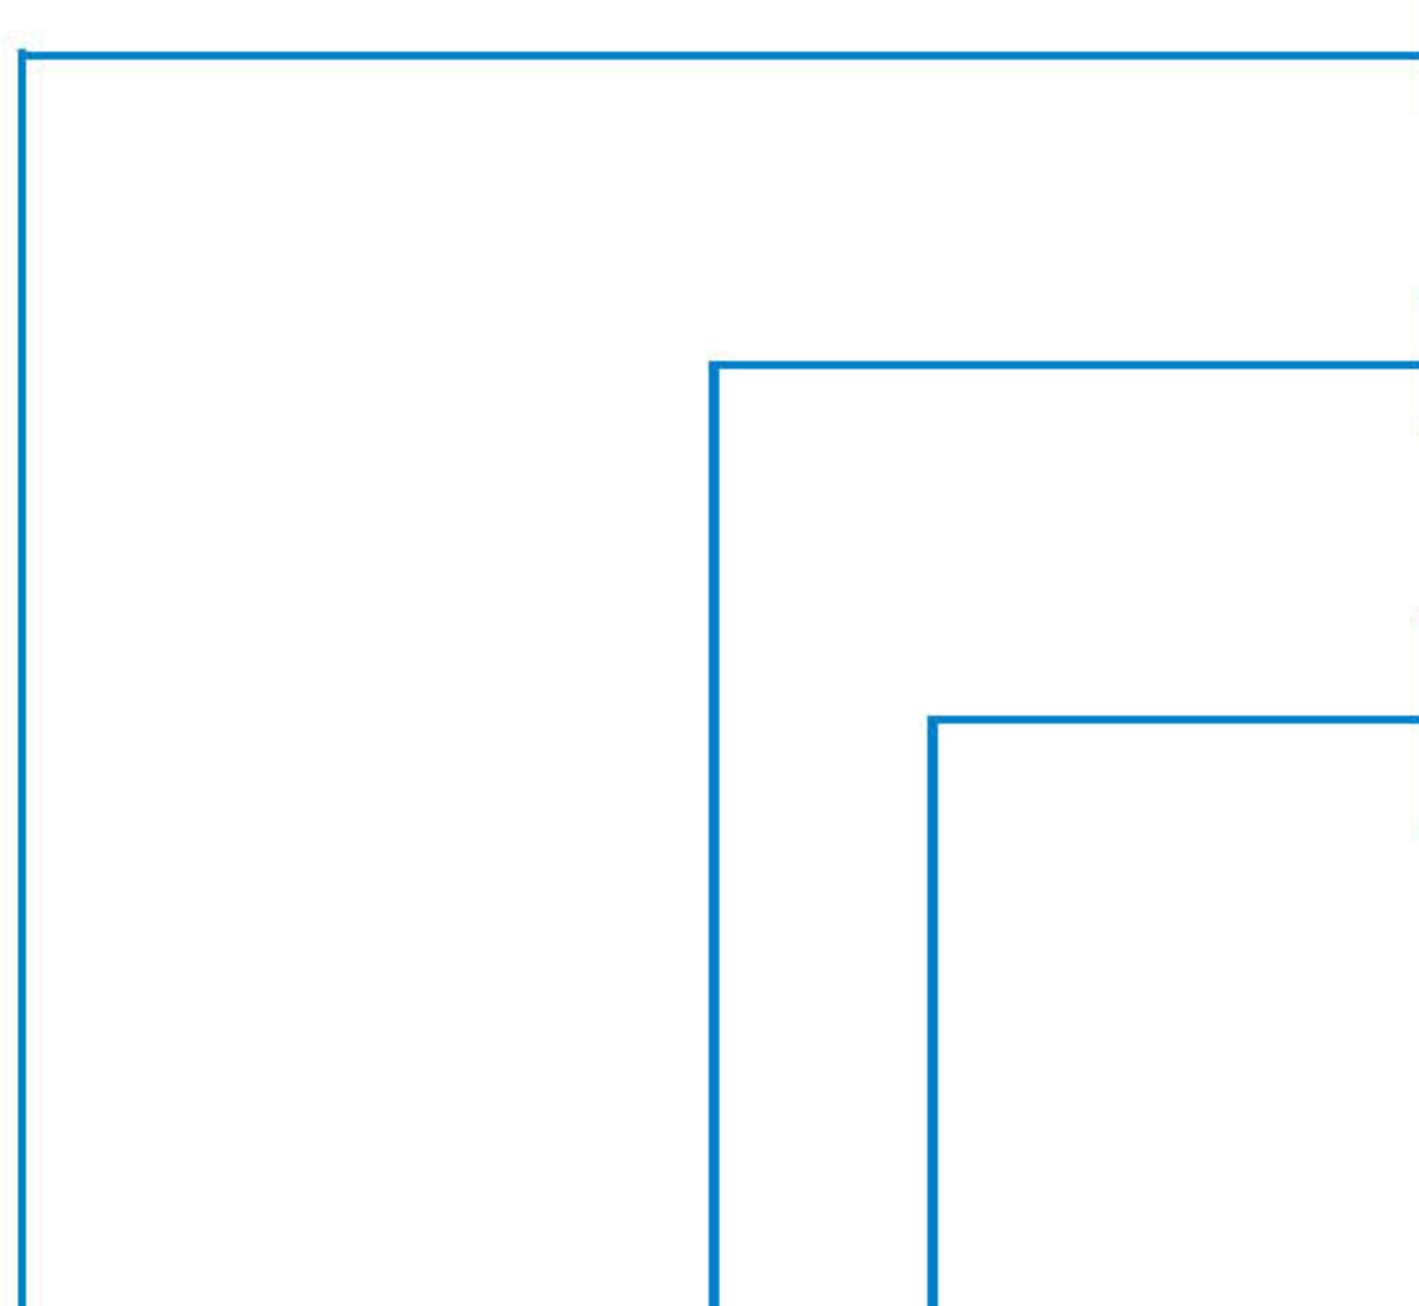

**Polzahl**

10 / 14 / 16 / 20 /  
26 / 34 / 40 / 50 / 60 / 64

**Beschichtung**

5 - vollverzinkt  
2 - Au flash\* (selektiv)

**Verriegelungsclips**

0 - ohne Verriegelungsclips\*  
2 - mit kurzen Verriegelungsclips  
3 - mit langem Verriegelungsclips

**No. of contacts**

10 / 14 / 16 / 20 /  
26 / 34 / 40 / 50 / 60 / 64

**Plating\***

5 - Tinned  
2 - Au flash\* (selective)

**Latches**

0 - without latches\*  
2 - with short latches  
3 - with long latches

**AWH xx G - 0 x x 2 - T**

Bitte „x“ durch die geeignete Option ersetzen  
Please replace „x“ with appropriate option

Verriegelungsclipse separat / Latches separate

**AWHCLIP LONG** (lang / long)  
**AWHCLIP XSHORT** (kurz / short)

\* Standard

Cable assemblies

D-Sub / Hoods Centronics

Multiflex - DIN41651

Modular

USB IEEE1394

Switches

Powercords Powerlets

DIN41612 Hardmetric

MiniDIN

Sockets / Strips Jumper

Terminal Blocks

Memory Card

FFC / FPC