



Product Details:

Clip-on magnetic ring

Clip-on magnetic ring products are mainly used in computer peripheral lines, power cords, printer lines, monitors, digital cameras, vibrators, communication equipment, etc.

The main function of the clip-on magnetic ring products is to prevent electromagnetic interference , filter components , play a shielding effect , improve data transmission quality and speed, etc. , such as computer peripheral cables , USB connection cables and digital cameras, etc.

Permeability: 650 (ui)

Saturation flux density: 330 (1600A/m)

Usage range: 1-1000MHz

Model	Diamentions mm					Imoedance (Ω)min		Fig
	ΦA	B	ΦC	D	E	25MHz	100MHz	
UF-35A	13 ±1	11.8 ±1	3.5 ±0.8	25.5 ±1	2.5 ±1	90	200	1
UF-50B	13 ±1	11.8 ±1	5.0 ±0.8	25.5 ±1	2.5 ±1	70	170	1
UF-70B	16.5 ±1	15 ±1	7.0 ±0.8	30 ±1	2.5 ±1	75	170	1
UF-80B	19.5 ±1	18 ±1	8.0 ±0.8	19.5 ±1	/	60	140	2
UF-90B	19.5 ±1	18 ±1	9.0 ±0.8	35 ±1	5.5 ±1	80	200	1
UF-1330B	23.5 ±1	22.2 ±1	13.5 ±0.8	36 ±1	10.5 ±1	65	165	1
UF-130B	30 ±1	30.5 ±1	13.0 ±0.8	34 ±1	39 ±1	110	240	2




Fig-1

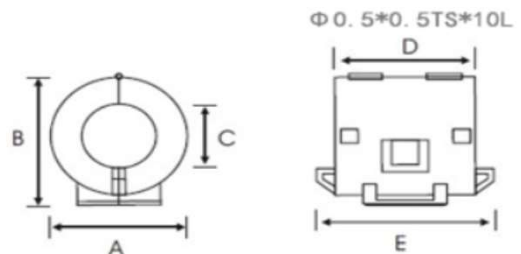


Fig-2