
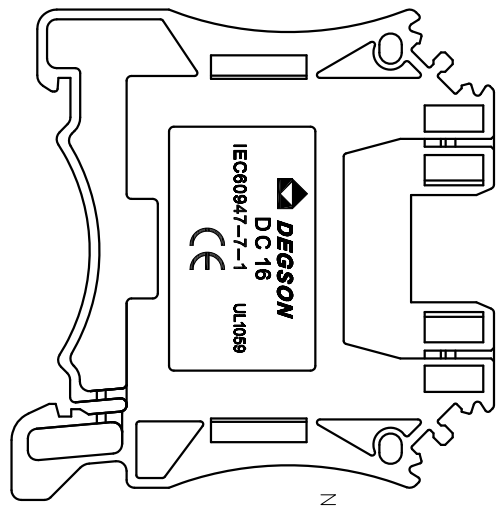
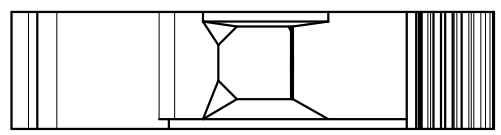
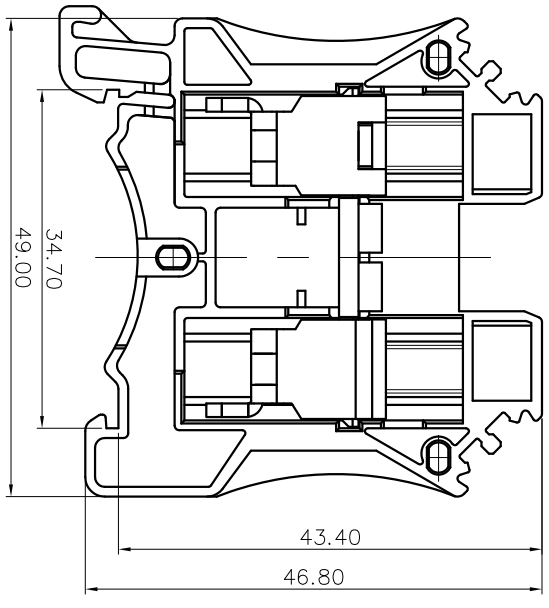


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

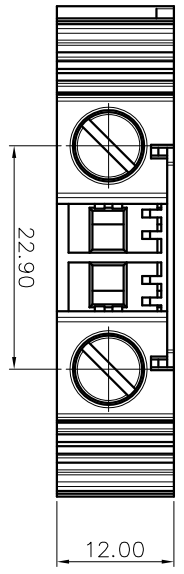

- NOTES1:  
UL Standard  
1. Rated voltage/current : 600V / 100A  
2. Withstanding voltage : AC2200V/1Min.  
3. Torque value : M5 , 27Lb.in  
4. Wire range : 14~3AWG  
IEC Standard  
1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(kV)	8kV
Rate voltage(V)	1000V
Rate current(A)	76A

2. Torque value : M5 , 2.5N·m  
3. Wire range : 1.5~25mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 12mm, Poles : N=01P  
3. Stripping length : 12~13mm  
4. Operating temperature: -40°C~+105°C  
5. Undimensioned tolerances:

Pitch	Over	Over	Nominal	Over	Over	Over	Over
mm	mm	mm	In mm	mm	mm	mm	mm
TO	6	10	TO	30	60	100	150
6	10	24	TO	60	100	150	±2
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	

6. RoHS Compliance

DC16 - 01P - 1Y - 00A (H)  
(Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
2. (Blue)  
3. (Black)  
4. (Green)  
5. (Orange)  
6. (Red)  
7. (Transparent)  
8. (Yellow)  
9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SCALE	1:1