

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE







NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 9A(01P)
300V / 9A(02P/03P)
- 2. Wire range : 24~18AWG

IEC Standard

1. Pollution degree			
Overvoltage category	III	III	II
Rate Impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	32V	160V	160V
Rate current(A)	9A		

- 2. Wire range : 0.2~0.75mm²





NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 4.00mm, Poles : N=01~03P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40°C~+130°C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension	range	mm
Over 6	Over 30	Over 60	Over 100
TO 10	TO 100	TO 150	TO 150
6	10	24	30
±0.15	±0.20	±0.30	±0.50
			±0.70
			±1.00
			±1.30
			±2*

- 6. RoHS Compliance

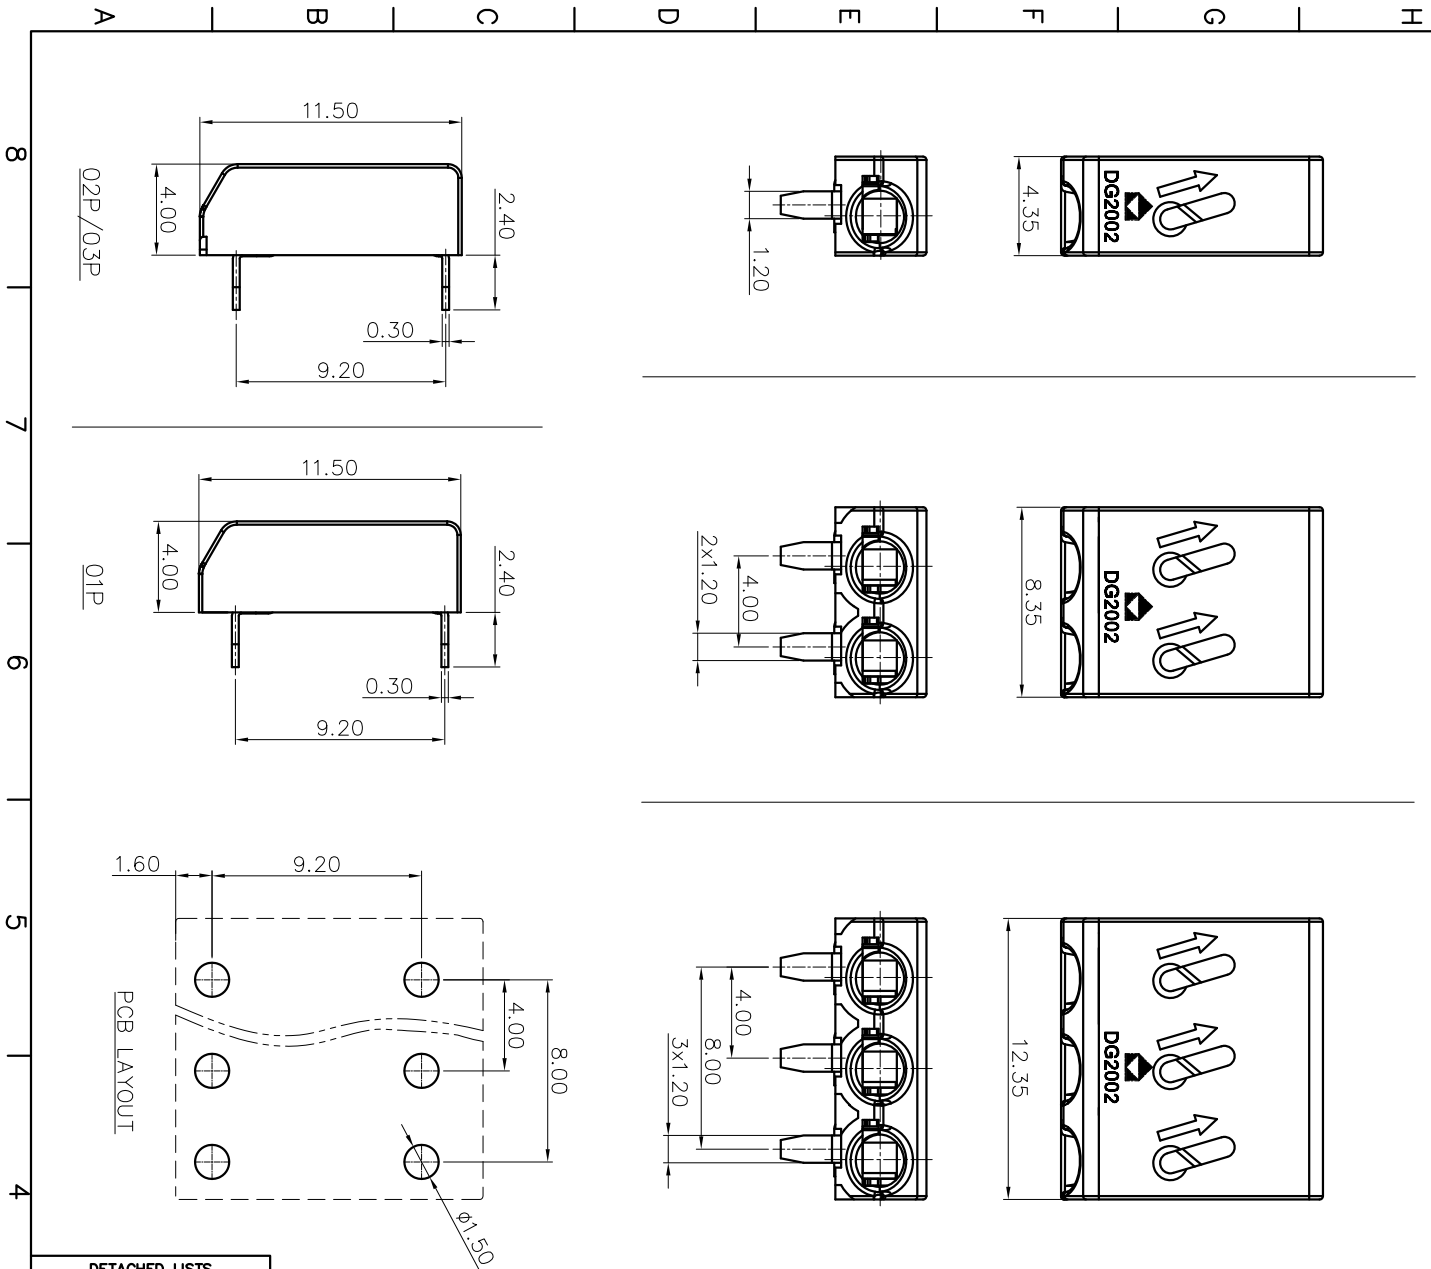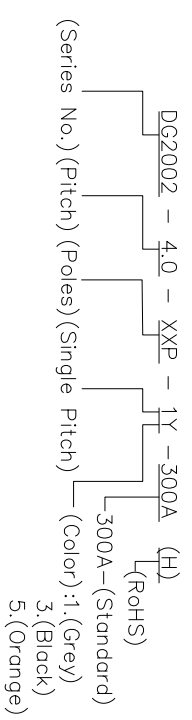

PCB LAYOUT

02P/03P

01P

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		REV	DO
		SHEET	1/1
		SCALE	1:1