


P.C.B SOCKET 2.54mm (0.100")

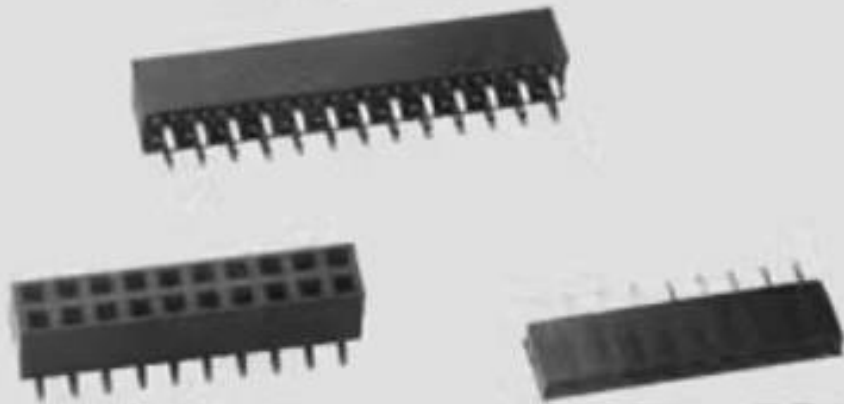

2.54mm排母HS.7

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black

接触件 Contacts: Brass

电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩ max. at DC 100mA

绝缘电阻 Insulator Resistance: 1000MΩ min. at 500V DC

耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute

工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -40°C~+105°C

焊接温度 Soldering Temperature: 260°C, 6s max

订购方法 How To Order

DK513-1 or 2x40

Series Position

S

S: Straight



M: S.M.T

G

G: Gold Plated

T: Tin Plated

Single Row

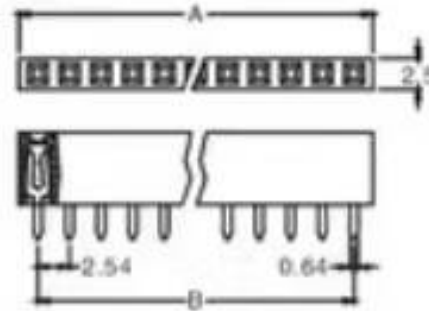

Dual Row

