



For K3690 K3691 K3710 K3711




Contact resistance : 30mΩ Max. (Initial)  
 Insulation resistance : 50MΩ Min. at 250VDC.  
 Withstanding voltage : 250VAC for one minute.  
 Insertion force : 4.5 kg.  
 Extraction force : 3.5 kg.  
 Life time : 5,000 cycles Min.


For K3693 K37130 ~ K37155




**K3690**  
3P ~ 8P din socket




**K3710**  
3P ~ 8P din socket (solder type)

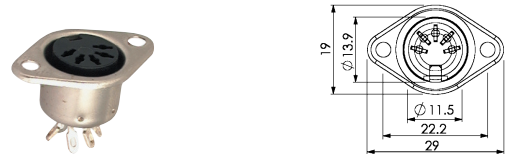

**K3691**  
3P ~ 8P din socket



**K3711**  
3P ~ 8P din socket

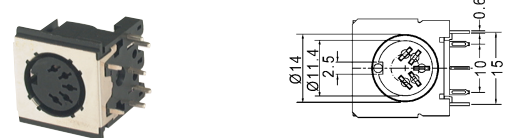


**K3693**  
3P ~ 8P mini din socket



**K37130**  
3P ~ 8P mini din socket




**K36940**  
4P mini din socket  
satin chrome barrel



**K37135 (K37151)**  
3P ~ 8P mini din socket



**K36942**  
4P mini din socket  
satin silver barrel



**K3715**  
3P ~ 8P mini din socket



**K36951**  
8P mini din socket



**K37152**  
3P ~ 8P mini din socket



**K37155**  
3P ~ 8P mini din socket

