



## GX-25 系列

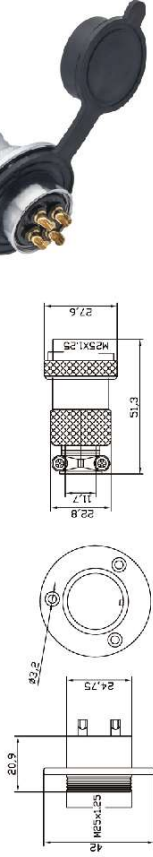


芯数	2	3	4	5	6	7	8	9	10	12
孔位排列										
额定电流/电压	20A-300V	20A-300V	15A-250V	15A-250V	12A-250V	12A-250V	7A-250V	7A-150V	7A-150V	5A-150V
工作电压 (AC.V) 分钟	500	400	400	400	300	300	200	200	200	200
绝缘阻抗 (MQ MIN.) DC 500V	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
接触阻抗 (MQ MIN.) DC 1A	1	1	1	1	1	1	3	3	3	3
焊杯口径径φ (mm)	2.4	2.4	2.4	2.4	2.4	2.4	1.6	1.6	1.6	1.3
接触体孔径φ (mm)	3.5	3.5	3.5	3	3	3	2	2	2	1.5

## WS-16 系列

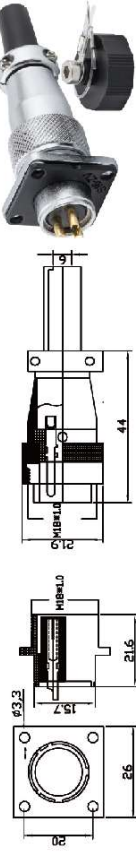


芯数	2	3	4	5	6	7	8	9	10
孔位排列									
额定电流/电压	10	10	5	5	5	5	5	5	5
工作电压 (AC.V) 分钟	500	500	500	500	500	400	400	400	400
绝缘阻抗 (MQ MIN.) DC 500V	2000	2000	2000	2000	2000	2000	2000	2000	2000
接触阻抗 (MQ MIN.) DC 1A	2.5	2.5	5	5	5	5	5	5	5

## WS-20 系列

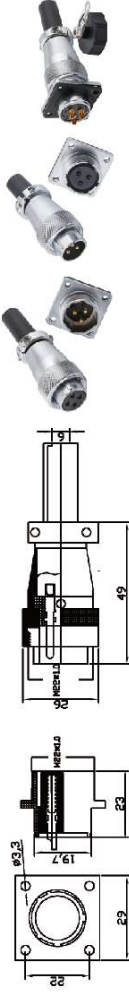

芯数	2	3	4	5	6	7	8	9	10	12	15
孔位排列											
额定电流/电压	25	25	25	10	5	10	10	5	5	5	5
工作电压 (AC.V) 分钟	500	500	500	500	500	500	500	400	400	400	400
绝缘阻抗 (MQ MIN.) DC 500V	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
接触阻抗 (MQ MIN.) DC 1A	1	1	1	2.5	1	2.5	2.5	5	5	5	5

## WS-24 系列

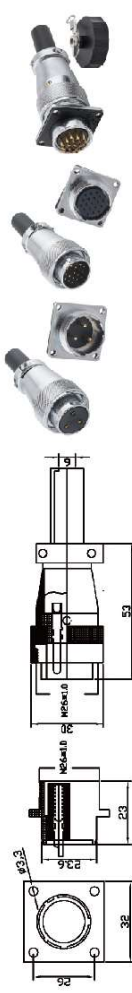

芯数	2	3	4	5	6	7	8	9	10	12	19
孔位排列											
额定电流/电压	25	25	25	25	25	5	5	5	10	10	5
工作电压 (AC.V) 分钟	500	500	500	500	500	500	500	500	500	500	400
绝缘阻抗 (MQ MIN.) DC 500V	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
接触阻抗 (MQ MIN.) DC 1A	1	1	1	1	1	5	5	5	2.5	2.5	5