


图例 description-figure

安装尺寸图 drawing

芯数
contacts产品型号
ordering-on

反装插座

Oppose the dress socket
IP55

2

GX16F-2B

3

GX16F-3B

4

GX16F-4B

5

GX16F-5B

6

GX16F-6B

7


GX16F-7B

8

GX16F-8B

The Hole Place Arranges(comply With The Needle Direction)

孔位排列 (从针的方向看)

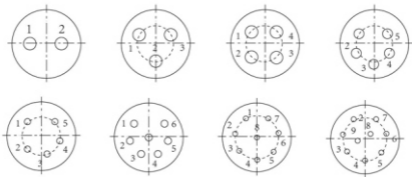

Technology Parameter

技术参数

| 芯数 No. Of contacts | 2P | 3P | 4P | 5P | 6P | 7P | 8P | 9P | 10P |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 额定电流/电压 Rated current/voltage | 7A- 125V | 7A- 125V | 5A- 125V | 5A- 125V | 4A- 125V | 4A- 125V | 4A- 125V | 4A- 125V | 4A- 125V |
| 工作电压 (AC.V)分钟 Operation limit voltage(AC.V.ms) | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 |
| 耐电压 (AC.V)分钟 Withstanding voltage(AC.V.ms) 1 minute | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 |
| 绝缘电阻(MΩ)dc 500V Insulation resistance(MΩ) at dc 500v | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 |
| 接触电阻(MΩ)dc 1a Contact resistance(MΩ) max.) at dc 51A | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| 焊杯口孔径Φ(mm) Solder cup mouth aperture | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 |
| 接触体孔径Φ(mm) Solder inter diameter | 2.45 | 2.45 | 2.45 | 2 | 1.15 | 1.15 | 1.15 | 1.15 | 1.15 |