
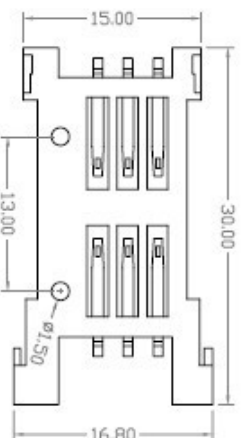
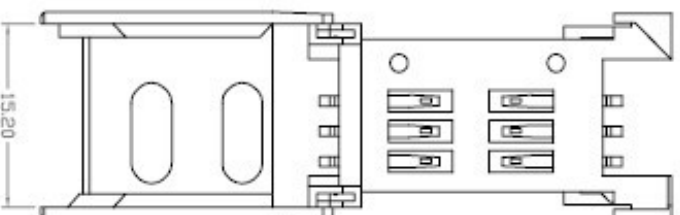
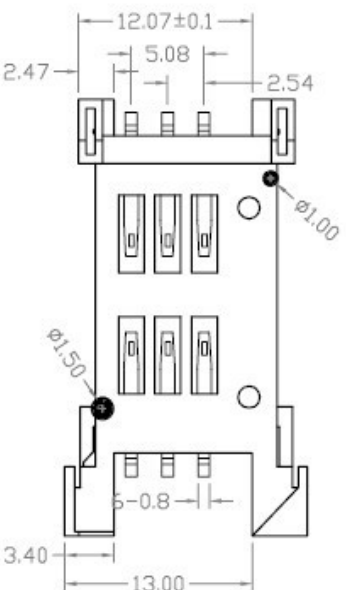


RoHS

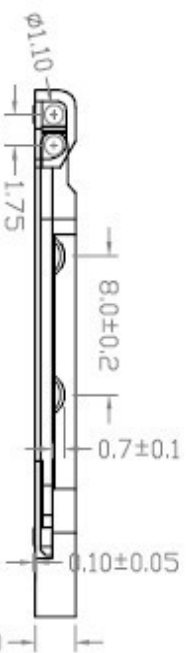

N.	REV	D.	

Notes:

Electrical:

1. Rated voltage: 50V Max
2. Rated current: 1A Max
3. Contact resistance: 100m Max
4. Insulation resistance: >100M
5. Dielectric: 500VAC 1MIN

Mechanical:

1. Contact: Phosphor bronze
2. Plating: Gold over Nickel
3. Bracket: LCP

Environmental:

1. Storage: -20C to 85C
2. Operation: -20C to 85C
3. Wave solder: 260C 8 Sec Max

Packaging:

1. Tape and reel
2. 800pcs per reel

Technical:

1. The appearance of product should not be smudgy, scrape, distortion
2. The plastic should be smooth on the edge. The reed no rust.

NO.	Name	Material	Q.	Mark
1	Reed	Pho. Co.	6	Plating Ni and AU
2	Up cover	LCP	1	BLACK
3	Bracket	LCP	1	BLACK

Tolerance		名称 (Title)		Xiamen Miles	
X. ±	0.20	SIM Card 6 pins Con.		图号 (Dwg No.)	
.X ±	0.10	材料 (Material)		KF-014	
.XX ±	0.05			代号 (Part No.)	
Des				MST-KF-014	
Ver		重量		单位	比例
App		g		mm	1:1