

Product overview Screw specification: PG teeth.


Product material: A.C.E part is made of UL approved nylon PA66(fire rating UL94V-2) : (V-0 fire rating nylon raw material can be customized) : B.D part is made of EPDM weatherproof rubber.

(Cold and high temperature rubber can be customized: high acid and alkali, chemical and corrosion resistant rubber).

Protection level: IP68 Operating temperature: static -40°C to 100°C , or instant heat resistance to 120°C : dynamic 20°C to 80°C , or instant heat resistance to 100°C .

Features: Design of special clamping claw and clamping ring, wide range of clamping cable, strong tensile resistance, waterproof, dustproof, salt resistance, weak acid, alcohol, oil, grease and general solvent.

Color type: Black, gray, other colors can be customized.

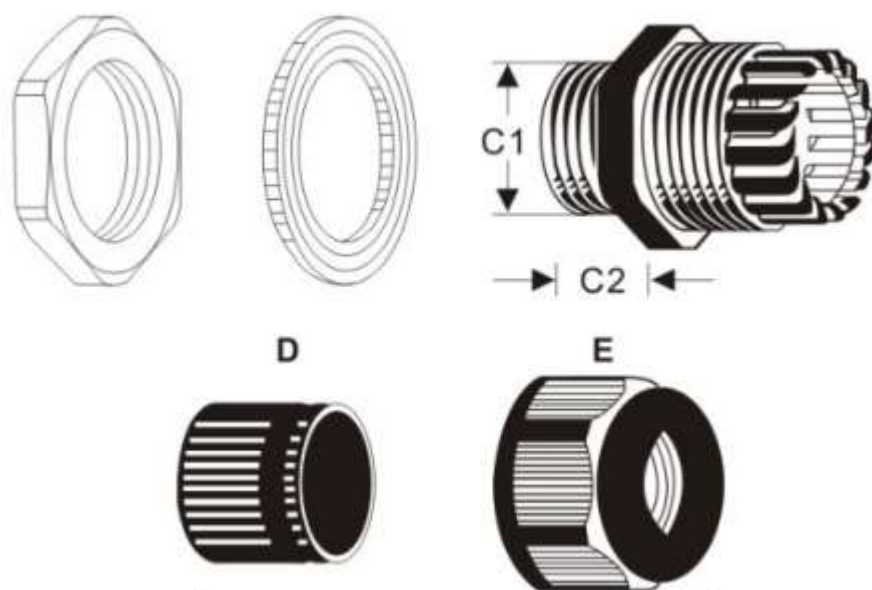

产品型号	适用电缆(mm) /加厚型	螺纹外径 (C1) mm	螺纹长度 (C2) mm	扳手直径 (mm)
PG7	3~6.5/ 2~5	12.5	8	16
PG9	4~8/ 2~6	15.2	8	19
PG11	5~10/ 3~7	18.6	8	22
PG13.5	6~12/ 5~9	20.4	10	24
PG16	10~14/ 7~12	22.5	10	27
PG19	12~16/ 10~13	24	10	27
PG21	13~18/ 9~16	28.3	10	33
PG25	16~21/ 13~18	30	11	35
PG29	18~25/ 13~20	37	12	42
PG36	22~32/ 20~26	47	14	52
PG42	32~38/ 25~31	54	14	60
PG48	37~44/ 29~35	59.3	15	64
PG63	42~50/ 32~40	71	28	77