

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless express written permission is granted. All rights reserved for patent, utility model or designs registrations. 非经明确授权, 否则禁止转让、复制、利用、交流本文件的内容。 现保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3





2

3

4

5

6

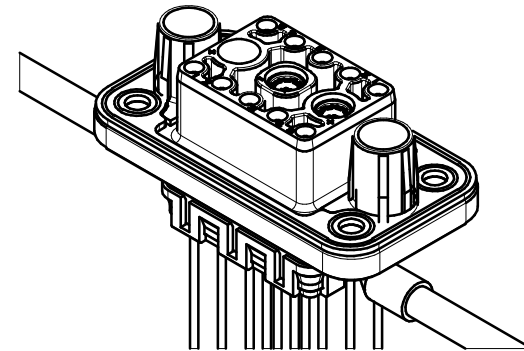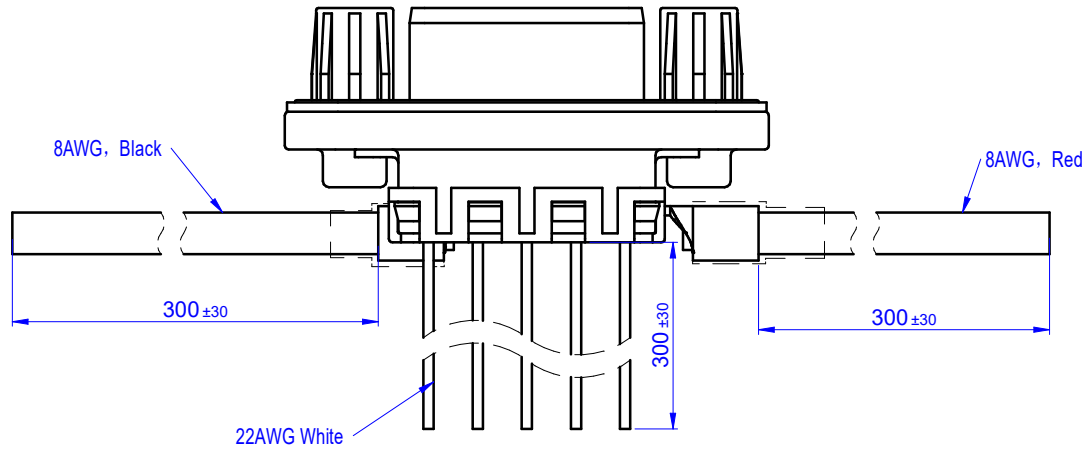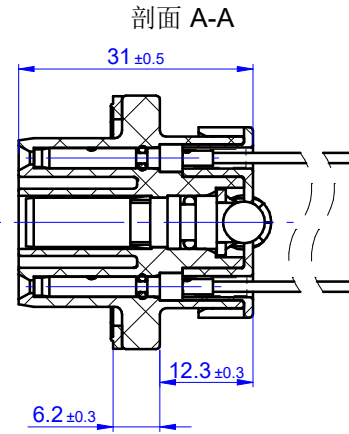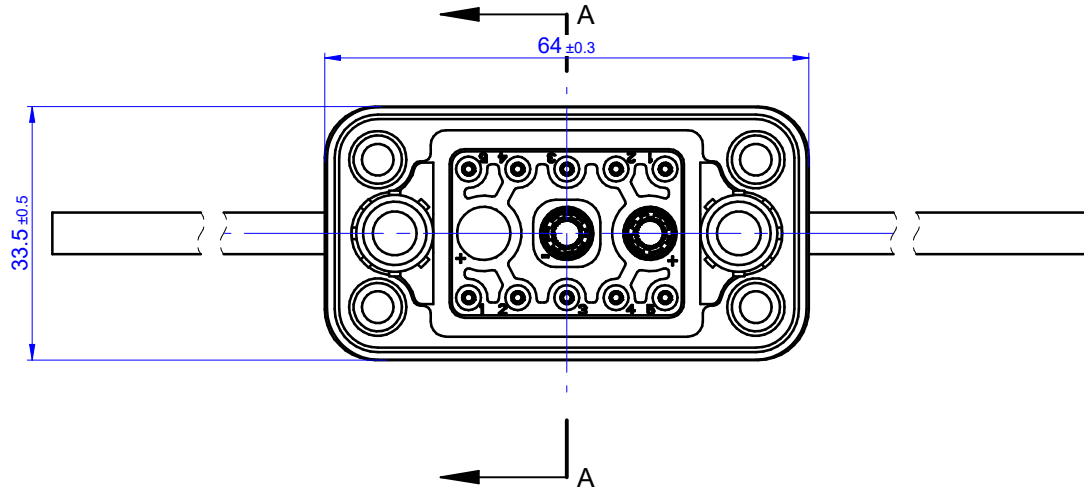

尺寸公差(mm)					线束长度尺寸公差(mm)				
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	0 ~ 5000	5000 ~ 10000	10000 ~ 30000	>30000	0.05/10 ±1°
±0.20	±0.30	±0.50	±0.70	±1.00	±50	±100	±200	±500	

Technical requirements:

Rated Voltage/Current	72VDC/60A
Insulation resistance	≥500MΩ
Mechanical working life	5000
Withstanding voltage	1500V AC
Key controlled symbol	*
Operating temperature(° C)	-40~+105
Levels of protection	IPX7 (When single)
Terminal	Crimping
Wire range	8AWG/22AWG

P-	8AWG, Black
P+	8AWG, Red
5	22AWG
4	22AWG
3	22AWG
2	22AWG
1	22AWG
Conn1	Spec.
Pin out	

			MATERIAL: 材质		SURFACE: 表面处理			
			MAT NO./REV: 物料编码 / 版本		MAT STATUS: 物料状态			
APPD:			NAME RA-EBBF-2010-F-L300-00A (H)					
CHKD: Eric								
DRFT: 靳森			DRAWING NO.		DRAWING STATUS		SCALE	SHEET
 A4 			图号		图纸类型		图纸状态	1:1.25 1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE