


未注公差/General tolerances(mm)													
0	>3	>6	>1	>1	>3	>5	>8	>1	>1	>2	>31	>4	>5
~ 0	~ 3	~ 10	~ 8	~ 5	~ 0	~ 80	~ 120	~ 180	~ 25	~ 31	~ 40	~ 50	~ 00
3	6	18	30	50	80	120	180	25	31	40	50	00	±2
±0.12	±0.20	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.93	±3.05	±5.19	±8.60	±20.20	±2.50

推荐面板安装尺寸
推荐面板厚度 ≥ 5mm

型号说明

SA-EBC-2105-F-00A(H)

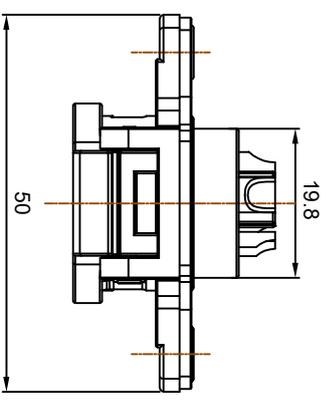

插座
组装式
系列名称
母端
通用型环保产品

产品插针数量
功率针 2pin,
PE针 1pin,
信号针 5pin

额定电压/Rated Voltage	110V/50A
额定电流/Rated Current	110V/50A
绝缘电阻/Insulation resistance	≥100MΩ
插拔次数/Mechanical working life(fading cycles)	3000
耐电压/Withstanding voltage	500V AC
使用温度范围/Operating temperature(°C)	-40~+85
防水等级/Levels of protection	IP67(Single)
接线方式/Terminal	Soldering

SURFACE: /

MATERIAL: /	NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
MAT NO.: /	DRAWING NO.: SA-EBC-2105-F-00A(H)
STATUS: /	REV: T0
APPD: /	SCALE: 2:1 SHEET 1/1
CHKD: /	TYPE: CUSTOMER DRAWING
DRT: Huangju 2021.8.23	DRFT: Huangju 2021.8.23
SIZE: A4	SIZE: A4
DRKT: 20MMX30MM	DRKT: 20MMX30MM
ECN: /	ECN: /
REV: /	REV: /