

IEC**IECEE
CB
SCHEME**

Ref. Certif. No.

JPTUV-031809

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEMESYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D'ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC**CB TEST CERTIFICATE
CERTIFICAT D'ESSAI OC**Product
Produit

Switching Power Supply

Name and address of the applicant
Nom et adresse du demandeurMean Well Enterprises Co., Ltd.
No. 28, Wu-Chuan 3rd Road
Wu Ku Ind. Park, Taipei Hsien 248 TaiwanName and address of the manufacturer
Nom et adresse du fabricantMean Well Enterprises Co., Ltd.
No. 28, Wu-Chuan 3rd Road
Wu Ku Ind. Park, Taipei Hsien 248 TaiwanName and address of the factory
Nom et adresse de l'usine

See additional page(s)

Rating and principal characteristics
Valeurs nominales et caractéristiques principalesInput : AC 100-240V; 50/60Hz; 1) 0.9A, 2) 0.75A; Class I
Output: refer to the test reportTrade mark (if any)
Marque de fabrique (si elle existe)

Trademark of Mean Well

Model/type Ref.
Ref. de type1) NEX-35y
(x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D)
2) SCP-35-z (z= 12, 24)Additional information (if necessary)
Information complémentaire (si nécessaire)

For model differences, refer to the test report.

A sample of the product was tested and found
to be in conformity with
Un échantillon de ce produit a été essayé et a été
considéré conforme à laIEC 60950-1:2005
National differences see test reportAs shown in the Test Report Ref. No. which forms part
of this Certificate
Comme indiqué dans le Rapport d'essais numéro de
référence qui constitue une partie de ce Certificat

11020301 001

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de Certification**TÜVRheinland®**TÜV Rheinland Japan Ltd.
Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku
Yokohama 224-0021 Japan
Phone + 81 45 914-3888
Fax + 81 45 914-3354
Mail: info@jpn.tuv.com
Web: www.tuv.com

Date: 14.04.2010

Signature:

Dipl.-Ing. W. Hsu

1. Mean Well Enterprises Co., Ltd.
No. 28, Wu-Chuan 3rd Road
Wu Ku Ind. Park, Taipei Hsien 248
Taiwan
2. GUANGZHOU MEAN WELL
ELECTRONICS CO., LTD
2nd Floor
No. A Building, Yuean Ind. Park
Dongpu Town, TianHe, Guangzhou, P.R. China
3. SuZhou Mean Well Technology
Co., Ltd.
No. 77, Jian-min Road,
Dong-qiao, Pan-yang Ind. Park,
Huang-dai Town, Xiang-cheng District, Suzhou, Jiangsu 215152, P.R. China

Additional information (if necessary)
Information complémentaire (si nécessaire)

Date: 14.04.2010

Signature:


Dipl.-Ing. W. Hsu



Test Report issued under the responsibility of:



TEST REPORT

**IEC 60950-1: 2005 (2nd Edition) and/or EN 60950-1:2006
Information technology equipment – Safety –
Part 1: General requirements**

Report Reference No	11020301 001
Date of issue	Apr. 12, 2010
Total number of pages	106
CB/CCA Testing Laboratory	TÜV Rheinland Taiwan Ltd., Taichung Laboratory
Address	10F, No. 219, Min Chuan Rd., Taichung 403, Taiwan
Applicant's name	Mean Well Enterprises Co., Ltd.
Address	No. 28, Wu-Chuan 3rd Road, Wu Ku Ind. Park, Taipei Hsien 248 Taiwan
Manufacturer's name	Same as applicant
Address	Same as applicant
Factory's name	See page 7
Address	See page 7
Test specification:	
Standard	<input checked="" type="checkbox"/> IEC 60950-1:2005 (2nd Edition) and/or <input checked="" type="checkbox"/> EN 60950-1:2006 + A11:2009
Test procedure	CB
Non-standard test method	N/A
Test Report Form No	IECEN60950_1C
Test Report Form(s) Originator	SGS Fimko Ltd
Master TRF	Dated 2007-06
Copyright © 2006 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
If this Test Report Form is used by non-CCA members, the CIG logo and the reference to the CCA Procedure shall be removed.	
This report is not valid as a CCA Test Report unless signed by an approved CCA Testing Laboratory and appended to a CCA Test Certificate issued by an NCB in accordance with CCA	
Test item description	Switching Power Supply
Trade Mark	
Manufacturer	Same as applicant
Model/Type reference	1) NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D) 2) SCP-35-z (z= 12, 24)
Ratings	See details on page 8



Testing procedure and testing location:	
<input checked="" type="checkbox"/> CB/CCA Testing Laboratory:	Refer to cover page
Testing location/ address..... :	Refer to cover page
<input type="checkbox"/> Associated CB Laboratory:	N/A
Testing location/ address..... :	
Tested by (name + signature)..... :	<i>Donnyfu</i>
Approved by (+ signature)..... :	<i>Jean Chen</i> <i>Donnyfu</i>
<input type="checkbox"/> Testing procedure: TMP	N/A
Tested by (name + signature)..... :	
Approved by (+ signature)..... :	
Testing location/ address..... :	
<input type="checkbox"/> Testing procedure: WMT	N/A
Tested by (name + signature)..... :	
Witnessed by (+ signature)..... :	
Approved by (+ signature)..... :	
Testing location/ address..... :	
<input type="checkbox"/> Testing procedure: SMT	N/A
Tested by (name + signature)..... :	
Approved by (+ signature)..... :	
Supervised by (+ signature)..... :	
Testing location/ address..... :	
<input type="checkbox"/> Testing procedure: RMT	N/A
Tested by (name + signature)..... :	
Approved by (+ signature)..... :	
Supervised by (+ signature)..... :	
Testing location/ address..... :	

Summary of testing:

Tests performed (name of test and test clause):

- All applicable tests as described in Test Case and Measurement Sections were performed.
- Pre-production samples without serial numbers.
- Load conditions used during testing, see appended in table 1.6.2.
- The maximum ambient temperature is specified as 45°C for NEx-35y and 50°C for SCP-35-z.
- Unless otherwise specified, all tests were performed on models NES-35-5, NES-35-12, NES-35-15, NES-35-24, NES-35-48, NED-35A, NED-35B, NET-35A, NET-35B, NET-35C, NET-35D, SCP-35-12, SCP-35-24 to represent the other similar models.

Testing location:

- All tests as described in Test Case and Measurement Sections were performed at the laboratory described on page 2.






Summary of compliance with National Differences:


EU Group Differences, EU Special National Conditions, EU A-Deviations, AT, AU, CA, CH, DE, DK, FI, FR, GB, IT, KR, NL, NO, PL, SE, SI, US.

Explanation of used codes: AT=Austria, AU=Australia, CA=Canada, CH=Switzerland, DE=Germany, DK=Denmark, FI=Finland, FR=France, GB=United Kingdom, IT=Italy, KR=Korea, NL=The Netherlands, NO=Norway, PL=Poland, SE=Sweden, SI=Slovenia, US=United States of America.

For National Differences see corresponding Attachment.



Copy of marking plate:

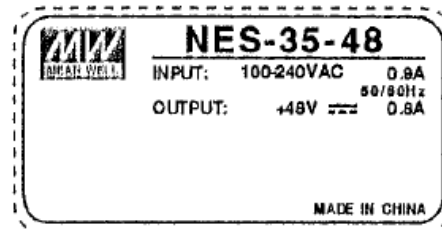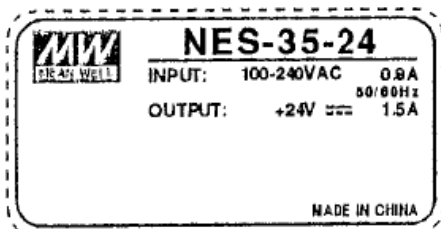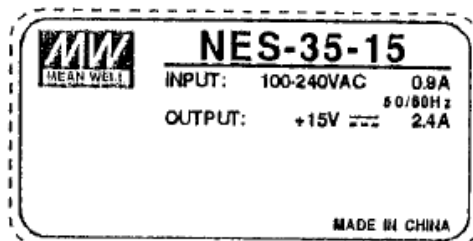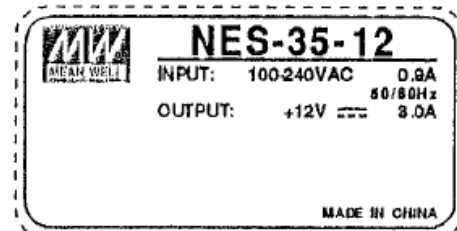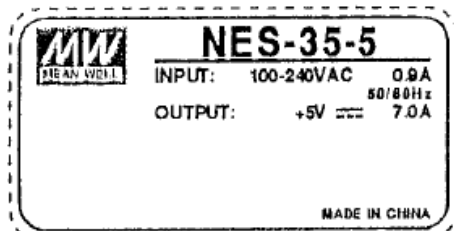

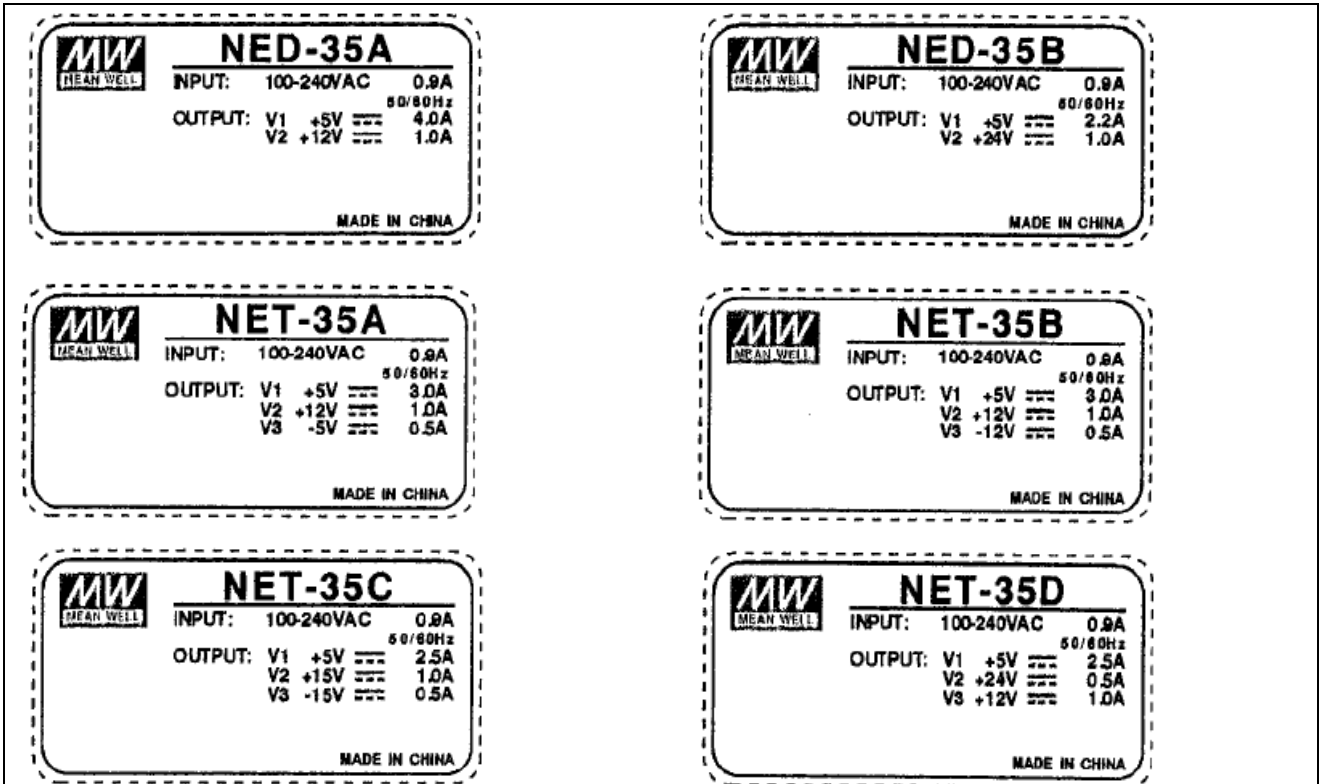

The above label is a draft of an artwork for marking plate pending approval by National Certification Bodies and it shall not be affixed to products prior to such an approval.

Copy of marking plate:

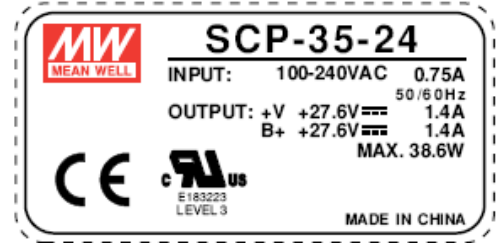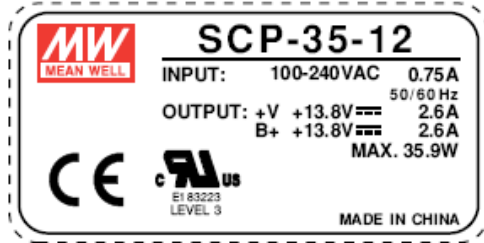

The above label is a draft of an artwork for marking plate pending approval by National Certification Bodies and it shall not be affixed to products prior to such an approval.

Test item particulars	
Equipment mobility	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in
Connection to the mains	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> permanent connection <input type="checkbox"/> detachable power supply cord <input type="checkbox"/> non-detachable power supply cord <input type="checkbox"/> not directly connected to the mains
Operating condition	<input checked="" type="checkbox"/> continuous <input type="checkbox"/> rated operating / resting time:
Access location	<input type="checkbox"/> operator accessible <input checked="" type="checkbox"/> restricted access location
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other:
Mains supply tolerance (%) or absolute mains supply values	±10%
Tested for IT power systems	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
IT testing, phase-phase voltage (V)	230V (for Norway)
Class of equipment	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified
Considered current rating (A)	16A (or 20A for North America)
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
IP protection class	IPX0
Altitude during operation (m)	Not over 2000m
Altitude of test laboratory (m)	Not over 2000m
Mass of equipment (kg)	Max. 0.4
Possible test case verdicts:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
Testing	
Date of receipt of test item	Mar., 2010
Date(s) of performance of tests	Mar. to Apr., 2010
General remarks:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Note: This TRF includes EN Group Differences together with National Differences and Special National Conditions, if any. All Differences are located in the Appendix to the main body of this TRF. Throughout this report a point is used as the decimal separator.	

General product information:

- The equipment models SCP-35-z and NEx-35y are building-in switching power supplies for the use in information technology equipment.
- Model difference:
 - Models NEx-35y are similar except for model designation, output rating, PCB layout, transformer (T1) and different rating of primary and secondary components as below:
 - For NES-35y, difference rating in components: R4, R5, R8, D100, C100, R100, C105, C106, C107, C110, R105, R106, ZD52, R120, R123, R124, C120, ZD51, R21, D4, R121, C37, R7.
 - For NED-35y, difference rating in components: D200, C200, R200, C205, C207, R205, C37, R7, C100, C105, C106.
 - For NET-35y, difference rating in components: D200, C200, R200, C205, C207, R205, D300, C305, R305, C105, C106, C100, C3, C4, C29, C30, C22, R8, R7, C129, C22, BD31.
 - Models SCP-35-z (z= 12 or 24) are similar models NES-35y (y= -12 or -24) except for model designation, input / output rating, secondary side of circuit / PCB layout, secondary winding of transformer (T1), top chassis was optional used, Tma is 50°C and addition “B+” output rating & provided output cable for “B+”, “B+” & “+V” output are combine power which has limit max. power.
- Two kinds of PCB edition for models NEx-35y, which are similar except for the component differents as below:
 - PCB P/N: NEx-35 (x=S, D or T) are designed for the X-cap (C1) and bleed resistor (R1) before fuse.
 - PCB P/N: NEx-35A (x=S, D or T) are designed for the X-cap (C1) and bleed resistor (R6) after fuse.
- The EUT is used terminal block or primary connector as input connection.
- The equipment is building-in type to use terminal block or primary connector as input connection, for connection to a.c. mains supply, wiring terminals for connection of external conductors and disconnect from the mains supply shall be evaluated in the final system.

Other comments:

Factories:

1. Mean Well Enterprises Co., Ltd.
No. 28, Wu-Chuan 3rd Road, Wu Ku Ind. Park, Taipei Hsien 248, Taiwan
2. GUANGZHOU MEAN WELL ELECTRONICS CO., LTD
2nd Floor, No. A Building, Yuean Ind. Park, Dongpu Town, TianHe, Guangzhou, P.R. China
3. SuZhou Mean Well Technology Co., Ltd.
No. 77, Jian-min Road, Dong-qiao, Pan-yang Ind. Park, Huang-dai Town, Xiang-cheng District, Suzhou, Jiangsu 215152, P.R. China

The manufacturer's declaration, that the samples tested represent the products from each factory, is available.

Definition of variable(s):

Variable:	Range of variable:	Content:
NEx-35y		
X	S, D or T	For denote different output: “S” design for single output, “D” design for dual output, “T” design for triple output
Y	-5, -12, -15, -24, -48, A, B, C or D	For denote different output ratings, details see below rating table.

SCP-35-z		
z	12 or 24	For denote different output ratings, details see below rating table.
<p><u>Attachments to this Test Report:</u></p> <ul style="list-style-type: none"> - Photo Documentation - Measurement Section - National Differences 		

Input and Output rating of all models				
Model: No.	Input Rating	Output Rating		
NES-35-5	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 7.0A		
NES-35-12	100-240VAC, 50/60Hz, 0.9A	+12Vdc, 3.0A		
NES-35-15	100-240VAC, 50/60Hz, 0.9A	+15Vdc, 2.4A		
NES-35-24	100-240VAC, 50/60Hz, 0.9A	+24Vdc, 1.5A		
NES-35-48	100-240VAC, 50/60Hz, 0.9A	+48Vdc, 0.8A		
NED-35A	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 4.0A	+12Vdc, 1.0A	
NED-35B	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 2.2A	+24Vdc, 1.0A	
NET-35A	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 3.0A	+12Vdc, 1.0A	-5Vdc, 0.5A
NET-35B	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 3.0A	+12Vdc, 1.0A	-12Vdc, 0.5A
NET-35C	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 2.5A	+15Vdc, 1.0A	-15Vdc, 0.5A
NET-35D	100-240VAC, 50/60Hz, 0.9A	+5Vdc, 2.5A	+24Vdc, 0.5A	+12Vdc, 1.0A
SCP-35-12	100-240VAC, 50/60Hz, 0.75A	+V: +13.8V, 2.6A	B+: +13.8V, 2.6A	Max. 35.9W
SCP-35-24	100-240VAC, 50/60Hz, 0.75A	+V: +27.6V, 1.4A	B+: +27.6V, 1.4A	Max. 38.6W

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		P
1.5	Components		P
1.5.1	General	See below.	P
	Comply with IEC 60950 or relevant component standard	See attachment measurement section table 1.5.1.	P
1.5.2	Evaluation and testing of components	Components, which are certified to IEC and/or national standards, are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment.	P
1.5.3	Thermal controls		N/A
1.5.4	Transformers	Transformers used are suitable for the intended application and comply with the relevant requirements of the standard and particularly with those of Annex C.	P
1.5.5	Interconnecting cables	Interconnection o/p cable to other device is carrying only SELV and energy level didn't exceed 240VA.	P
1.5.6	Capacitors bridging insulation	Between lines: X1 or X2 capacitors according to IEC 60384-14 with 21 days damp heat test. Between line and ground: Y1 or Y2 capacitors according to IEC 60384-14 with 21 days damp heat test. Between primary and secondary: Y1 capacitor according to IEC 60384-14 with 21 days damp heat test was bridged by one capacitor.	P
1.5.7	Resistors bridging insulation	See below.	P
1.5.7.1	Resistors bridging functional, basic or supplementary insulation	One approval bleeder resistor is located Before fuse (for PCB P/N: NEx-35 (x=S, D or T) and one bleeder resistor is located after fuse (for PCB P/N: NEx-35A (x=S, D or T) a fuse as providing protective device while short circuit.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems	Phase to earth designed in according to phase-to-phase working voltage. The Y2 min. class capacitor used between phase-to-earth is rated accordingly.	P
1.5.9	Surge suppressors	See below.	P
1.5.9.1	General	Approved Varistor comply with Annex Q used in primary circuit.	P
1.5.9.2	Protection of VDRs	A fuse is connected in series with VDR.	P
1.5.9.3	Bridging of functional insulation by a VDR	Approved Varistor located between mains lines.	P
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A

1.6	Power interface		P
1.6.1	AC power distribution systems	TN power system and IT power system (for Norway).	P
1.6.2	Input current	See appended table 1.6.2.	P
1.6.3	Voltage limit of hand-held equipment		N/A
1.6.4	Neutral conductor	The neutral is not identified in the equipment. Basic insulation for rated voltage between earthed parts and primary phases. Reinforced insulation for rated voltage between secondary parts and primary phases.	P

1.7	Marking and instructions		P
1.7.1	Power rating	Marking label was stuck on metal enclosure.	P
	Rated voltage(s) or voltage range(s) (V)	See copy of marking plate.	P
	Symbol for nature of supply, for d.c. only	Mains from AC source.	N/A
	Rated frequency or rated frequency range (Hz)	See copy of marking plate.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated current (mA or A)	See copy of marking plate.	P
	Manufacturer's name or trade-mark or identification mark	See copy of marking plate.	P
	Model identification or type reference	See copy of marking plate.	P
	Symbol for Class II equipment only	Class I equipment.	N/A
	Other markings and symbols	Other symbols do not give rise to misunderstanding.	N/A
1.7.2	Safety instructions and marking	See below.	P
1.7.2.1	General	Installation instruction with directions to maintain the requirements of IEC 60950-1 with installation in end product. Included are directions regarding the maximum input rating, the maximum output rating, the maximum ambient temperature and that the requirements of the IEC 60950-1 must be observed with the installation in end product.	P
1.7.2.2	Disconnect devices	Terminal Block or Primary Connector used, equipment is for building-in. Compliance shall be investigated in the end product.	N/A
1.7.2.3	Overcurrent protective device	Equipment is for building-in. Compliance shall be investigated in the end product.	N/A
1.7.2.4	IT power distribution systems	For Norway compliance has to be evaluated during the national approval.	N/A
1.7.2.5	Operator access with a tool	Equipment is for building-in. Compliance shall be investigated in the end product.	N/A
1.7.2.6	Ozone		N/A
1.7.3	Short duty cycles	Equipment is designed for continuous operation.	N/A
1.7.4	Supply voltage adjustment	Full range voltage design, no necessary adjustment.	N/A
	Methods and means of adjustment; reference to installation instructions		N/A
1.7.5	Power outlets on the equipment		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	Fuse marking on main board near fuse: FS1 T 2A/250V for all models FS1 F6.3A/250 for model SCP-35-z	P
1.7.7	Wiring terminals	See below.	P
1.7.7.1	Protective earthing and bonding terminals	Terminal Block or Primary Connector used and symbol for Protective earthing terminal (IEC 60417-5019) provided on top metal cover and symbol for Protective bonding terminal (IEC 60417-5017) provided on PCB board.	P
1.7.7.2	Terminals for a.c. mains supply conductors	Indication by the capital letters L, N are shown in label stick on top metal cover or show in PCB for terminal block or Primary Connector indication.	P
1.7.7.3	Terminals for d.c. mains supply conductors	AC supplied equipment.	N/A
1.7.8	Controls and indicators	See below.	N/A
1.7.8.1	Identification, location and marking	No controls and indicators.	N/A
1.7.8.2	Colours	No indicators.	N/A
1.7.8.3	Symbols according to IEC 60417		N/A
1.7.8.4	Markings using figures		N/A
1.7.9	Isolation of multiple power sources	Only one supply from the mains.	N/A
1.7.10	Thermostats and other regulating devices	Neither thermostats nor other regulating devices provided.	N/A
1.7.11	Durability	The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 s and then again for 15 s with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling nor lifting of the label edge.	P
1.7.12	Removable parts	No removable parts.	N/A
1.7.13	Replaceable batteries	No batteries provided.	N/A
	Language(s)	See above.	—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.14	Equipment for restricted access locations.....:	Should be investigated in the final system assembly.	N/A

2	PROTECTION FROM HAZARDS		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	See below.	P
2.1.1.1	Access to energized parts	The accessibility of hazardous are prevented with in the final system. Therefore, the inspection with test pin and test finger should be conducted with the approval of the end system. Installation instruction requires, that the requirements of the IEC/EN 60950-1 must be observed to the installation.	N/A
	Test by inspection	See above.	N/A
	Test with test finger (Figure 2A)	See above.	N/A
	Test with test pin (Figure 2B)	See above.	N/A
	Test with test probe (Figure 2C)	No TNV circuits provided.	N/A
2.1.1.2	Battery compartments	No battery compartment.	N/A
2.1.1.3	Access to ELV wiring	This EUT is for building-in. Compliance shall be investigated in the final system assembly.	N/A
	Working voltage (V_{peak} or V_{rms}); minimum distance through insulation (mm)	See above.	—
2.1.1.4	Access to hazardous voltage circuit wiring	This equipment is for building-in. Compliance shall be investigated in the final system assembly.	N/A
2.1.1.5	Energy hazards	See attachment measurement section table 2.1.1.5. Energy does not exceeded 240VA between any two points in o/p connector of secondary circuit.	P
2.1.1.6	Manual controls	No manual controls.	N/A
2.1.1.7	Discharge of capacitors in equipment	No risk of electric shock, see below.	P
	Measured voltage (V); time-constant (s)	See attachment measurement section table 2.1.1.7.	—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.1.1.8	Energy hazards – d.c. mains supply		N/A
	a) Capacitor connected to the d.c. mains supply ...:		N/A
	b) Internal battery connected to the d.c. mains supply		N/A
2.1.1.9	Audio amplifiers		N/A
2.1.2	Protection in service access areas	Equipment is for building-in. Compliance shall be investigated in the end product.	N/A
2.1.3	Protection in restricted access locations	Equipment is for building-in. Compliance shall be investigated in the end product.	N/A

2.2	SELV circuits		P
2.2.1	General requirements	See below, the secondary circuits were tested as SELV.	P
2.2.2	Voltages under normal conditions (V)	42.4Vpeak or 60Vdc are not exceeded between any conductor of the SELV circuits under normal operation. See measurement section table 2.2.2.	P
2.2.3	Voltages under fault conditions (V)	Single fault did not cause excessive voltage in accessible SELV circuits. Limits of 71V peak and 120Vd.c. were compliance Figure 2E and limits 42.4V peak and 60Vd.c. were not exceeded for longer than 0.2 and were compliance Figure 2E. See measurement section table 2.2.3.	P
2.2.4	Connection of SELV circuits to other circuits	See sub-clauses 1.5.6, 2.2.2, 2.2.3 and 2.4.3.	P

2.3	TNV circuits		N/A
2.3.1	Limits		N/A
	Type of TNV circuits		—
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed.....		—
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed.....		—
2.3.5	Test for operating voltages generated externally		N/A

2.4	Limited current circuits		P
2.4.1	General requirements	See below.	P
2.4.2	Limit values	See measurement section table 2.4.2.	P
	Frequency (Hz).....	See measurement section table 2.4.2.	—
	Measured current (mA).....	The peak drop voltage was measured with an oscilloscope at a 2kΩ non-inductive resistor. See measurement section table 2.4.2.	—
	Measured voltage (V)	See measurement section table 2.4.2.	—
	Measured circuit capacitance (nF or μF).....	See measurement section table 2.4.2.	—
2.4.3	Connection of limited current circuits to other circuits	Output circuit as limited current circuit connected to primary via one bridging capacitor.	P

2.5	Limited power sources		N/A
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output under normal operating and single fault condition		N/A
	d) Overcurrent protective device limited output		N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA).....		—
	Current rating of overcurrent protective device (A)		—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.6	Provisions for earthing and bonding		P
2.6.1	Protective earthing	Reliable connection of the equipment to the protective earthing terminal of the equipment is required and shall be evaluated in end product.	N/A
2.6.2	Functional earthing	Secondary functional earthing is separated to primary by reinforced or double insulation. No green/yellow wire used for functional earthing.	P
2.6.3	Protective earthing and protective bonding conductors	See below.	P
2.6.3.1	General	See below.	P
2.6.3.2	Size of protective earthing conductors	No power cord provided.	N/A
	Rated current (A), cross-sectional area (mm ²), AWG		—
2.6.3.3	Size of protective bonding conductors	Evaluation by test. See sub-clause 2.6.3.4, protective current rating is considered as 16A.	P
	Rated current (A), cross-sectional area (mm ²), AWG		—
	Protective current rating (A), cross-sectional area (mm ²), AWG		—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min)	See measurement section table 2.6.3.4 for test result.	P
2.6.3.5	Colour of insulation		N/A
2.6.4	Terminals	See below.	N/A
2.6.4.1	General	See below.	N/A
2.6.4.2	Protective earthing and bonding terminals	The earthed trace is considered as protective bonding conductors are evaluation by 2.6.3.4 test. Shall be evaluated in the final system assembly.	N/A
	Rated current (A), type, nominal thread diameter (mm)	Evaluation by test. See sub-clause 2.6.3.4.	—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors	Shall be evaluated in the final system assembly.	N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.5	Integrity of protective earthing	See below.	P
2.6.5.1	Interconnection of equipment	This unit has its own earthing connection. Any other units connected via the DC output Terminal Block shall provide SELV only.	P
2.6.5.2	Components in protective earthing conductors and protective bonding conductors	No switch or overcurrent protective device in protective bonding conductor.	P
2.6.5.3	Disconnection of protective earth	Shall be evaluated in the final system assembly.	N/A
2.6.5.4	Parts that can be removed by an operator	See above.	N/A
2.6.5.5	Parts removed during servicing	See above.	N/A
2.6.5.6	Corrosion resistance	All safety earthing connections in compliance with Annex J.	P
2.6.5.7	Screws for protective bonding	Only ISO thread screw used in metal chassis for protective bonding. Metal thickness at least twice the pitch of the screw. No self-tapping or spaced thread screws.	P
2.6.5.8	Reliance on telecommunication network or cable distribution system	No TNV.	N/A
2.7	Overcurrent and earth fault protection in primary circuits		P
2.7.1	Basic requirements	Equipment relies on a rated fuse or 16 A (20A North America) circuit breaker of the wall outlet installation protection of the building installation in regard to L to N short-circuit. Over current protection is provided by the built-in fuse.	P
	Instructions when protection relies on building installation	Not applicable for pluggable equipment type A.	N/A
2.7.2	Faults not simulated in 5.3.7	The protection device is well dimensioned and mounted.	P
2.7.3	Short-circuit backup protection	The final system is considered to pluggable equipment type A, the building installation is considered as providing short circuit backup protection.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.4	Number and location of protective devices	Over current protection by one built-in fuse.	P
2.7.5	Protection by several devices	Only one fuse provided.	N/A
2.7.6	Warning to service personnel	This equipment is for building-in. Compliance shall be evaluated in the final system.	N/A

2.8	Safety interlocks		N/A
2.8.1	General principles		N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches and relays		N/A
2.8.7.1	Contact gaps (mm)		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

2.9	Electrical insulation		P
2.9.1	Properties of insulating materials	Natural rubber, asbestos or hygroscopic materials are not used.	P
2.9.2	Humidity conditioning	Tested for 120hrs.	P
	Relative humidity (%), temperature (°C)	95% R.H., 40°C.	—
2.9.3	Grade of insulation	The adequate levels of safety insulation is provided and maintained to comply with the requirements of this standard.	P
2.9.4	Separation from hazardous voltages	Double or reinforced for the highest working voltage across a particular insulation is provided.	P
	Method(s) used	Method 1 used.	—

2.10	Clearances, creepage distances and distances through insulation		P
2.10.1	General	See below.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.1.1	Frequency	EUT frequency under 30kHz.	P
2.10.1.2	Pollution degrees	Pollution degree 2.	P
2.10.1.3	Reduced values for functional insulation	See sub-clause 5.3.4.	P
2.10.1.4	Intervening unconnected conductive parts	No such conductive parts.	N/A
2.10.1.5	Insulation with varying dimensions	Not applicable.	N/A
2.10.1.6	Special separation requirements	No TNV circuit.	N/A
2.10.1.7	Insulation in circuits generating starting pulses	No such circuit.	N/A
2.10.2	Determination of working voltage	See below.	P
2.10.2.1	General	The unit was connected to a 240V TN power system. 2.10.1.5 not applied for.	P
2.10.2.2	RMS working voltage	See measurement section table 2.10.2.	P
2.10.2.3	Peak working voltage	See measurement section table 2.10.2.	P
2.10.3	Clearances	See below and alternative method of annex G is not considered.	P
2.10.3.1	General	Annex F and minimum clearances considered.	P
2.10.3.2	Mains transient voltages	Normal transient voltage considered.	P
	a) AC mains supply	Overvoltage category II for primary circuit and transient voltage 2500Vpeak.	P
	b) Earthed d.c. mains supplies		N/A
	c) Unearthed d.c. mains supplies		N/A
	d) Battery operation		N/A
2.10.3.3	Clearances in primary circuits	See appended table 2.10.3 and 2.10.4.	P
2.10.3.4	Clearances in secondary circuits	See sub-clause 5.3.4.	N/A
2.10.3.5	Clearances in circuits having starting pulses	No such circuit.	N/A
2.10.3.6	Transients from a.c. mains supply		P
2.10.3.7	Transients from d.c. mains supply		N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems		N/A
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network ..		N/A
2.10.4	Creepage distances	See below.	P
2.10.4.1	General	Considered.	P
2.10.4.2	Material group and comparative tracking index	CTI rating for all materials are min. 100.	P
	CTI tests	Material group IIIb is assumed to be used.	—
2.10.4.3	Minimum creepage distances	See appended table 2.10.3 and 2.10.4.	P
2.10.5	Solid insulation	Complied with 2.10.5.2 to 2.10.5.14 and 5.2.	P
2.10.5.1	General	See below.	P
2.10.5.2	Distances through insulation	See appended table 2.10.5.	P
2.10.5.3	Insulating compound as solid insulation	Certified sources of photo couplers used. See sub-clause 2.10.5.2 and 2.10.10.	P
2.10.5.4	Semiconductor devices	For photo couplers see sub-clause 2.10.5.3.	P
2.10.5.5.	Cemented joints		N/A
2.10.5.6	Thin sheet material – General	Considered.	P
2.10.5.7	Separable thin sheet material	Reinforced insulation.	P
	Number of layers (pcs)	See measurement section tables C.2 for detail applicable.	—
2.10.5.8	Non-separable thin sheet material	Not applicable.	N/A
2.10.5.9	Thin sheet material – standard test procedure	Not applicable.	N/A
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure	See below.	P
	Electric strength test	See appended table 2.10.5.	—
2.10.5.11	Insulation in wound components		N/A
2.10.5.12	Wire in wound components		N/A
	Working voltage		N/A
	a) Basic insulation not under stress		N/A
	b) Basic, supplementary, reinforced insulation		N/A
	c) Compliance with Annex U		N/A
	Two wires in contact inside wound component; angle between 45° and 90°		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		—
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage		N/A
	- Basic insulation not under stress		N/A
	- Supplementary, reinforced insulation		N/A
2.10.6	Construction of printed boards	See below.	P
2.10.6.1	Uncoated printed boards	See appended table 2.10.3 and 2.10.4.	P
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)		N/A
2.10.7	Component external terminations	See appended table 2.10.3 and 2.10.4.	P
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling		P
2.10.10	Test for Pollution Degree 1 environment and insulating compound		P
2.10.11	Tests for semiconductor devices and cemented joints		N/A
2.10.12	Enclosed and sealed parts		N/A
3	WIRING, CONNECTIONS AND SUPPLY		P
3.1	General		P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.1.1	Current rating and overcurrent protection	Internal wirings are UL recognized wiring which is PVC insulated, rated VW-1, 300V, min. 80°C, the wiring gauge is suitable for current intended to be carried. (for model SCP-35-z)	P
3.1.2	Protection against mechanical damage	Wires do not touch sharp edges. Where they touch heatsinks additional tubing or cable tie is provided so that the heatsink cannot damage the insulation and cause hazard. (for model SCP-35-z)	P
3.1.3	Securing of internal wiring	The wiring is so routed and fixed that there is not excessive strength on the wire and terminal connections. Damage of the conductor insulation or loosening of the terminal connection is unlikely. (for model SCP-35-z)	P
3.1.4	Insulation of conductors	The insulation of the individual conductors is suitable for the application and the working voltage. For the insulation material see sub-clause 3.1.1.	P
3.1.5	Beads and ceramic insulators	Not used.	N/A
3.1.6	Screws for electrical contact pressure	To ensure proper earth connection through the PCB, screws and spring-washers are provided to compensate possible shrinkage of the PCB material.	P
3.1.7	Insulating materials in electrical connections	All connections are metal to metal or, where contact pressure is transmitted through PCB material for earthing purposes a combination of screw and spring-washer is provided.	P
3.1.8	Self-tapping and spaced thread screws	No self tapping screws are used.	N/A
3.1.9	Termination of conductors	All conductors are reliably secured.	P
	10 N pull test	After test, no break away or pivot on its terminal.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.1.10	Sleeving on wiring	No sleeving used as supplementary insulation.	N/A

3.2	Connection to a mains supply <i>SPS for building-in with Terminal Block or Primary Connector for input connect, shall be evaluated in the final system assembly.</i>		N/A
3.2.1	Means of connection		N/A
3.2.1.1	Connection to an a.c. mains supply		N/A
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections		N/A
3.2.3	Permanently connected equipment		N/A
	Number of conductors, diameter of cable and conduits (mm)		—
3.2.4	Appliance inlets		N/A
3.2.5	Power supply cords		N/A
3.2.5.1	AC power supply cords		N/A
	Type		—
	Rated current (A), cross-sectional area (mm ²), AWG		—
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N)		—
	Longitudinal displacement (mm)		—
3.2.7	Protection against mechanical damage		N/A
3.2.8	Cord guards		N/A
	Diameter or minor dimension D (mm); test mass (g)		—
	Radius of curvature of cord (mm).....		—
3.2.9	Supply wiring space		N/A

3.3	Wiring terminals for connection of external conductors <i>EUT is for building-in. Compliance has to be evaluated for the final system.</i>		N/A
3.3.1	Wiring terminals		N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated current (A), cord/cable type, cross-sectional area (mm ²).....:		—
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type, nominal thread diameter (mm)		—
3.3.6	Wiring terminal design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A

3.4	Disconnection from the mains supply <i>EUT is for building-in. Compliance has to be evaluated for the final system.</i>		N/A
3.4.1	General requirement		N/A
3.4.2	Disconnect devices		N/A
3.4.3	Permanently connected equipment		N/A
3.4.4	Parts which remain energized		N/A
3.4.5	Switches in flexible cords		N/A
3.4.6	Number of poles - single-phase and d.c. equipment		N/A
3.4.7	Number of poles - three-phase equipment		N/A
3.4.8	Switches as disconnect devices		N/A
3.4.9	Plugs as disconnect devices		N/A
3.4.10	Interconnected equipment	The equipment is interconnected to other devices by secondary golden fingers only.	N/A
3.4.11	Multiple power sources	Only one supply connection provided.	N/A

3.5	Interconnection of equipment		P
3.5.1	General requirements	The power supply is not considered for connection to TNV.	P
3.5.2	Types of interconnection circuits	Interconnection circuits of SELV via secondary Terminal Block.	P
3.5.3	ELV circuits as interconnection circuits	No ELV interconnection.	N/A
3.5.4	Data ports for additional equipment		N/A

4	PHYSICAL REQUIREMENTS		P
---	-----------------------	--	---

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.1	Stability		N/A
	Angle of 10°	Equipment is for building-in. Compliance has to be evaluated when installed into the final system.	N/A
	Test force (N)		N/A

4.2	Mechanical strength		P
4.2.1	General	See below. After tests, unit complies with the requirements of sub-clause 2.1.1, 2.6.1 and 2.10. However, Open Frame building-in type, shall be evaluated in the final system assembly.	P
4.2.2	Steady force test, 10 N	Applied to components other than those serving as an metal chassis.	P
4.2.3	Steady force test, 30 N	30N force applied to metal chassis for following: <ul style="list-style-type: none"> • Front side (near TB1) • Top side • Left side (near LF1) 	P
4.2.4	Steady force test, 250 N	Building-in type SPS should be evaluated in the final system assembly.	N/A
4.2.5	Impact test	Building-in type SPS should be evaluated in the final system assembly.	N/A
	Fall test		N/A
	Swing test		N/A
4.2.6	Drop test; height (mm)	Building-in type SPS should be evaluated in the final system assembly.	N/A
4.2.7	Stress relief test	Metal chassis.	N/A
4.2.8	Cathode ray tubes	No CRT in the unit.	N/A
	Picture tube separately certified		N/A
4.2.9	High pressure lamps	No high pressure lamp provided.	N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.2.10	Wall or ceiling mounted equipment; force (N)	Equipment is for building-in. Compliance has to be evaluated when installed into the final system.	N/A

4.3	Design and construction		P
4.3.1	Edges and corners	Equipment is for building-in and compliance must be evaluated in end product.	N/A
4.3.2	Handles and manual controls; force (N).....:		N/A
4.3.3	Adjustable controls	No adjustable controls.	N/A
4.3.4	Securing of parts	Mechanical fixings in such a way designed that they will withstand mechanical stress occurring in normal use.	P
4.3.5	Connection by plugs and sockets	Mismatching of connectors either not possible or does not result in any hazard. Equipment is for building-in and compliance must be evaluated in end product.	N/A
4.3.6	Direct plug-in equipment		N/A
	Torque		—
	Compliance with the relevant mains plug standard		N/A
4.3.7	Heating elements in earthed equipment		N/A
4.3.8	Batteries		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
4.3.9	Oil and grease	Insulation in intended use not considered to be exposed to oil or grease.	N/A
4.3.10	Dust, powders, liquids and gases	Equipment in intended use not considered to be exposed to these.	N/A
4.3.11	Containers for liquids or gases	No container for liquid or gas provided.	N/A
4.3.12	Flammable liquids	No flammable liquids provided.	N/A
	Quantity of liquid (l)		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Flash point (°C)		N/A
4.3.13	Radiation	See below.	N/A
4.3.13.1	General	Neither ionizing radiation nor laser nor flammable liquids presents. For LED, see below.	P
4.3.13.2	Ionizing radiation		N/A
	Measured radiation (pA/kg)		—
	Measured high-voltage (kV)		—
	Measured focus voltage (kV)		—
	CRT markings		—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation		N/A
4.3.13.5	Laser (including LEDs)	AEL of control LED far below the limiting values for LED Class 1.	P
	Laser class	Below Class 1.	—
4.3.13.6	Other types		N/A
4.4	Protection against hazardous moving parts		N/A
4.4.1	General		N/A
4.4.2	Protection in operator access areas		N/A
4.4.3	Protection in restricted access locations		N/A
4.4.4	Protection in service access areas		N/A
4.5	Thermal requirements		P
4.5.1	General	No exceeding temperature.	P
4.5.2	Temperature tests	See appended table 4.5.	P
	Normal load condition per Annex L	See Annex L.	—
4.5.3	Temperature limits for materials	See appended table 4.5.	P
4.5.4	Touch temperature limits	No operator access areas.	N/A
4.5.5	Resistance to abnormal heat	Phenolic bobbin material used in Transformer (T1) which accept without test. Other source see appended table 4.5.5.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.6	Openings in enclosures		N/A
4.6.1	Top and side openings	Equipment is for building-in. Compliance shall be evaluated for the final system.	N/A
	Dimensions (mm)		—
4.6.2	Bottoms of fire enclosures		N/A
	Construction of the bottom, dimensions (mm)		—
4.6.3	Doors or covers in fire enclosures		N/A
4.6.4	Openings in transportable equipment		N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm)		—
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks)		—

4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	See below.	P
	Method 1, selection and application of components wiring and materials	Use of materials with the required flammability classes.	P
	Method 2, application of all of simulated fault condition tests	Not applied for.	N/A
4.7.2	Conditions for a fire enclosure	See below.	N/A
4.7.2.1	Parts requiring a fire enclosure	With having the following components: - Components in primary - Components in secondary (not supplied by LPS) - Components having unenclosed arcing parts at hazardous voltage or energy level - Insulated wirings The fire enclosure is required. However, with this unit as a building-in component, the meeting of the requirements has to be observed within the end product.	N/A
4.7.2.2	Parts not requiring a fire enclosure	See 4.7.2.1.	N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	Materials		P
4.7.3.1	General	PCB is rated accordingly. See appended table 1.5.1 for details.	P
4.7.3.2	Materials for fire enclosures	Metal chassis.	N/A
4.7.3.3	Materials for components and other parts outside fire enclosures		N/A
4.7.3.4	Materials for components and other parts inside fire enclosures	Internal components except small parts are V-2 or better.	P
4.7.3.5	Materials for air filter assemblies	No air filter provided.	N/A
4.7.3.6	Materials used in high-voltage components	No high voltage components provided.	N/A

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		P
5.1	Touch current and protective conductor current		P
5.1.1	General	See sub-clauses 5.1.2 to 5.1.6.	P
5.1.2	Configuration of equipment under test (EUT)	See below.	P
5.1.2.1	Single connection to an a.c. mains supply	EUT has only single AC mains connection.	P
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	Equipment of figure 5A used.	P
5.1.4	Application of measuring instrument	Using measuring instrument in annex D.	P
5.1.5	Test procedure	The touch current was measured from mains to DC output golden fingers traces (-) and metal chassis (earth).	P
5.1.6	Test measurements	See measurement section table 5.1.6.	P
	Supply voltage (V)	See measurement section table 5.1.6.	—
	Measured touch current (mA)	See measurement section table 5.1.6.	—
	Max. allowed touch current (mA)	See measurement section table 5.1.6.	—
	Measured protective conductor current (mA)		—
	Max. allowed protective conductor current (mA).....		—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.7	Equipment with touch current exceeding 3,5 mA	Touch current does not exceed 3.5mA.	N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	No TNV.	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system	No TNV.	N/A
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks	No connected to TNV.	N/A
	a) EUT with earthed telecommunication ports		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A

5.2	Electric strength		P
5.2.1	General	See appended table 5.2.	P
5.2.2	Test procedure	See appended table 5.2.	P

5.3	Abnormal operating and fault conditions		P
5.3.1	Protection against overload and abnormal operation	See appended table 5.3.	P
5.3.2	Motors		N/A
5.3.3	Transformers	Having shorted the output of the transformer, no high temperature of the transformer was recorded or observed. Results of the short-circuit tests see appended table 5.3 and measurement section C.2.	P
5.3.4	Functional insulation	Requirement c). Test results see measurement section table 5.3.	P
5.3.5	Electromechanical components		N/A
5.3.6	Audio amplifiers in ITE		N/A
5.3.7	Simulation of faults	See appended table 5.3.	P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.8	Unattended equipment	None of the listed components was provided.	N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	See below.	P
5.3.9.1	During the tests	No fire occurred, no emit molten metal.	P
5.3.9.2	After the tests	Electric strength tests primary to SELV and primary to earth were passed.	P

6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements		N/A
	Supply voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions		N/A

6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)		—
	Current limiting method		—

7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A
7.1	General		N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.3	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples.....:		—
	Wall thickness (mm)		—
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material.....:		—
	Wall thickness (mm)		—
A.2.2	Conditioning of samples; temperature (°C)		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C		—
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements		N/A
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V)		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V)		N/A
B.8	Test for motors with capacitors		N/A
B.9	Test for three-phase motors		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.10	Test for series motors		N/A
	Operating voltage (V)		—

C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		P
	Position	T1	—
	Manufacturer	See appended table 1.5.1.	—
	Type	See appended table 1.5.1.	—
	Rated values	See appended table 1.5.1.	—
	Method of protection	Over current protection by circuit design.	—
C.1	Overload test	See appended table 5.3.	P
C.2	Insulation	See appended table 5.2.	P
	Protection from displacement of windings	Refer to measurement section table C.2.	P

D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		P
D.1	Measuring instrument	Figure D.1 used.	P
D.2	Alternative measuring instrument		N/A

E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
---	---	--	-----

F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		P
---	--	--	---

G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supplies		N/A
G.2.3	Unearthed d.c. mains supplies		N/A
G.2.4	Battery operation		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances		N/A
H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N/A
J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		P
	Metal(s) used	Compliance.	—
K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V)		N/A
K.3	Thermostat endurance test; operating voltage (V) :		N/A
K.4	Temperature limiter endurance; operating voltage (V)		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A
L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		P
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A
L.6	Motor-operated files		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

L.7	Other business equipment	Continuous operation at max. rated output load.	P
-----	--------------------------	---	---

M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA)		—
M.3.2	Tripping device and monitoring voltage		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V)		N/A

N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A

P	ANNEX P, NORMATIVE REFERENCES		—
---	-------------------------------	--	---

Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		P
	a) Preferred climatic categories	Certified component used. See appended table 1.5.1.	P
	b) Maximum continuous voltage		P
	c) Pulse current		P

R	Annex R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
S.1	Test equipment		N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
			—
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N/A
			—
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		P
V.1	Introduction	See below.	P
V.2	TN power distribution systems	Single-phase TN power system considered and used for testing.	P
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
W.1	Touch current from electronic circuits		N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
X.1	Determination of maximum input current		N/A
X.2	Overload test procedure		N/A
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
Y.1	Test apparatus		N/A
Y.2	Mounting of test samples		N/A
Y.3	Carbon-arc light-exposure apparatus		N/A



IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.4	Xenon-arc light exposure apparatus		N/A
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		P
AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N/A
BB	ANNEX BB, CHANGES IN THE SECOND EDITION		—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
EN 60950-1:2006 – CENELEC COMMON MODIFICATIONS			
Contents	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations		P
General	Delete all the "country" notes in the reference document according to the following list: 1.4.8 Note 2 1.5.1 Note 2 & 3 1.5.7.1 Note 1.5.8 Note 2 1.5.9.4 Note 1.7.2.1 Note 4, 5 & 6 2.2.3 Note 2.2.4 Note 2.3.2 Note 2.3.2.1 Note 2 2.3.4 Note 2 2.6.3.3 Note 2 & 3 2.7.1 Note 2.10.3.2 Note 2 2.10.5.13 Note 3 3.2.1.1 Note 3.2.4 Note 3. 2.5.1 Note 2 4.3.6 Note 1 & 2 4.7 Note 4 4.7.2.2 Note 4.7.3.1 Note 2 5.1.7.1 Note 3 & 4 5.3.7 Note 1 6 Note 2 & 5 6.1.2.1 Note 2 6.1.2.2 Note 6.2.2 Note 6. 2.2.1 Note 2 6.2.2.2 Note 7.1 Note 3 7.2 Note 7.3 Note 1 & 2 G.2.1 Note 2 Annex H Note 2		P
1.3.Z1	Add the following subclause: 1.3.Z1 Exposure to excessive sound pressure The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones. NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment", and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.		N/A
1.5.1	Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC		N/A
1.7.2.1	Add the following NOTE: NOTE Z1 In addition, the instructions shall include, as far as applicable, a warning that excessive sound pressure from earphones and headphones can cause hearing loss		N/A

IEC/EN 60950-1															
Clause	Requirement + Test	Result - Remark	Verdict												
2.7.1	Replace the subclause as follows: Basic requirements To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		P												
2.7.2	This subclause has been declared 'void'.		N/A												
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N/A												
3.2.5.1	Replace "60245 IEC 53" by "H05 RR-F"; "60227 IEC 52" by "H03 VV-F or H03 VVH2-F"; "60227 IEC 53" by "H05 VV-F or H05 VVH2-F2". In Table 3B, replace the first four lines by the following: <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border-right: 1px solid black;"> Up to and including 6</td> <td style="width: 20%;"></td> <td style="width: 20%; text-align: right;">0,75^{a)}</td> <td style="width: 10%; border-left: 1px solid black;"> </td> </tr> <tr> <td style="border-right: 1px solid black;"> Over 6 up to and including 10</td> <td style="text-align: center;">(0,75)^{b)}</td> <td style="text-align: right;">1,0</td> <td style="border-left: 1px solid black;"> </td> </tr> <tr> <td style="border-right: 1px solid black;"> Over 10 up to and including 16</td> <td style="text-align: center;">(1,0)^{c)}</td> <td style="text-align: right;">1,5</td> <td style="border-left: 1px solid black;"> </td> </tr> </table> In the conditions applicable to Table 3B delete the words "in some countries" in condition ^{a)} . In NOTE 1, applicable to Table 3B, delete the second sentence.	Up to and including 6		0,75 ^{a)}		Over 6 up to and including 10	(0,75) ^{b)}	1,0		Over 10 up to and including 16	(1,0) ^{c)}	1,5			N/A
Up to and including 6		0,75 ^{a)}													
Over 6 up to and including 10	(0,75) ^{b)}	1,0													
Over 10 up to and including 16	(1,0) ^{c)}	1,5													
3.3.4	In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; border-right: 1px solid black;"> Over 10 up to and including 16</td> <td style="width: 33%; text-align: center;">1,5 to 2,5</td> <td style="width: 33%; text-align: center;"> 1,5 to 4</td> <td style="width: 10%; border-left: 1px solid black;"> </td> </tr> </table> Delete the fifth line: conductor sizes for 13 to 16 A.	Over 10 up to and including 16	1,5 to 2,5	1,5 to 4			N/A								
Over 10 up to and including 16	1,5 to 2,5	1,5 to 4													
4.3.13.6	Add the following NOTE: NOTE Z1 Attention is drawn to 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz. Standards taking into account this Recommendation which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		N/A												

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Annex H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2.		N/A
Bibliography	Additional EN standards.		—



ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		—
----	---	--	---

ZB	SPECIAL NATIONAL CONDITIONS		P
1.2.4.1	In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.		N/A
1.5.7.1	In Finland, Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2.		N/A
1.5.8	In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).		P
1.5.9.4	In Finland, Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	In Finland, Norway and Sweden , CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows: In Finland: "Laitte on liitettävä suojamaadoituskoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"		N/A
1.7.5	In Denmark , socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.		N/A
2.2.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.2	In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.6.3.3	In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A.		P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A
2.10.5.13	In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N/A
3.2.1.1	In Switzerland , supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets: SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998: SEV 5932-2.1998 Plug Type 25 3L+N+PE 230/400 V, 16 A SEV 5933-2.1998 Plug Type 21 L+N 250 V, 16 A SEV 5934-2.1998 Plug Type 23 L+N+PE 250 V, 16 A		N/A
3.2.1.1	In Denmark , supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.		N/A
3.2.1.1	In Spain , supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994. Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994. If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.		N/A
3.2.1.1	In the United Kingdom , apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations. NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	In Ireland , apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.		N/A
3.2.4	In Switzerland , for requirements see 3.2.1.1 of this annex.		N/A
3.2.5.1	In the United Kingdom , a power supply cord with conductor of 1,25 mm ² is allowed for equipment with a rated current over 10 A and up to and including 13 A.		N/A
3.3.4	In the United Kingdom , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: <ul style="list-style-type: none"> • 1,25 mm² to 1,5 mm² nominal cross-sectional area. 		N/A
4.3.6	In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
4.3.6	In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N/A
5.1.7.1	In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: <ul style="list-style-type: none"> • STATIONARY PLUGGABLE EQUIPMENT TYPE A that <ul style="list-style-type: none"> - is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and - has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and - is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT. 		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1	<p>In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 132400:1994, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400, in the sequence of tests as described in EN 132400. 		N/A
6.1.2.2	<p>In Finland, Norway and Sweden, the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.</p>		N/A
7.2	<p>In Finland, Norway and Sweden, for requirements see 6.1.2.1 and 6.1.2.2 of this annex.</p> <p>The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.</p>		N/A
7.3	<p>In Norway and Sweden, there are many buildings where the screen of the coaxial cable is normally not connected to the earth in the building installation.</p>		N/A
7.3	<p>In Norway, for installation conditions see EN 60728-11:2005.</p>		N/A
ZC	A-DEVIATIONS (informative)		P

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.1	Sweden (Ordinance 1990:944) Add the following: NOTE In Sweden, switches containing mercury are not permitted.		N/A
1.5.1	Switzerland (Ordinance on environmentally hazardous substances SR 814.081, Annex 1.7, Mercury - Annex 1.7 of SR 814.81 applies for mercury.) Add the following: NOTE In Switzerland, switches containing mercury such as thermostats, relays and level controllers are not allowed.		N/A
1.7.2.1	Denmark (Heavy Current Regulations) Supply cords of CLASS I EQUIPMENT, which is delivered without a plug, must be provided with a visible tag with the following text: <div style="text-align: center;"> Vigtigt! Lederen med grøn/gul isolation må kun tilsluttes en klemme mærket  eller  </div> If essential for the safety of the equipment, the tag must in addition be provided with a diagram, which shows the connection of the other conductors, or be provided with the following text: "For tilslutning af de øvrige ledere, se medfølgende installationsvejledning."		N/A
1.7.2.1	Germany (Gesetz über technische Arbeitsmittel und Verbraucherprodukte (Geräte- und Produktsicherheitsgesetz – GPSG) [Law on technical labour equipment and consumer products], of 6th January 2004, Section 2, Article 4, Clause (4), Item 2). If for the assurance of safety and health certain rules during use, amending or maintenance of a technical labour equipment or readymade consumer product are to be followed, a manual in German language has to be delivered when placing the product on the market. Of this requirement, rules for use even only by SERVICE PERSONS are not exempted.		N/A
1.7.5	Denmark (Heavy Current Regulations) With the exception of CLASS II EQUIPMENT provided with a socket outlet in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-4a, CLASS II EQUIPMENT shall not be fitted with socket-outlets for providing power to other equipment.		N/A
1.7.13	Switzerland (Ordinance on chemical hazardous risk reduction SR 814.81, Annex 2.15 Batteries) Annex 2.15 of SR 814.81 applies for batteries.		N/A
5.1.7.1	Denmark (Heavy Current Regulations, Chapter 707, clause 707.4) TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B.		N/A

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: list of critical components					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹ .	
1. Chassis (Bottom)	--	--	Metal, Min. 1.0 mm thick	--	--	
2. Chassis (Top)(optional provided for models SCP-35- z only)	--	--	Metal, Min. 0.6mm thick	--	--	
3. Terminal Block (TB1)	Dinkle	DT-4 series	20A, 300V, V-0	--	UL	
	Dinkle	DT-43 series	21A, 300V, V-0	--	UL	
	Dinkle	DT-45 series	25A, 300V, V-0	--	UL	
	Dinkle	DT-49 series	25A, 300V, V-0	--	UL	
	Howder	HB-95 series HI-20 series	10A, 250V, V-0	--	UL	
	Switchlab	T14 series T24 series T34 series T35 series	20A, 300V, V-0	--	UL	
	Switchlab	T44 series	15A, 300V, V-0	--	UL	
	JITE	BTB-654 series	20A, 300V, V-0	--	UL	
Or Primary Connector (CN1)	Dinkle	EK-950 series	30A, 300V, V-0	--	UL	
	Switchlab	MB910 series	30A, 300V, V-0	--	UL	
	Taiwan King Pin	P8950I-X8 (X8=02 to 24)	Max. 7A, 250Vac	EN/IEC 61984	TÜV, UL	
4. PCB	--	--	V-1 or better min. 130°C	UL 796	UL	
5. Y-Capacitors (C3, C4, C22, C23, C29, C30) (Optional) (Y1, Y2 type)	Murata	KX, KH	Max. 4700pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL	
	Walsin	AC, AH	Max. 4700pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL	

IEC/EN 60950-1					
Clause	Requirement + Test			Result - Remark	Verdict
	TDK	CS	Max. 4700pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
	TDK	CD	Max. 4700pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
	Welson	WD, KL	Max. 4700pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
6. Bleeder Resistor (R1) (For PCB P/N: NEx-35; x=S, D, T only)	Futaba	RM-Series	1MΩ, min.1/4W	IEC/EN 60065 comply with clause 14.1 a)	Semko
	Queen Mao	HV series	1MΩ, min.1/4W	IEC/EN 60065 comply with clause 14.1 a)	VDE
Or R6 (For PCB P/N: NEx-35A; x=S, D, T and model SCP-35)	--	--	680kΩ, Min.1/4W	--	--
7. Fuse (FS1)	Conquer	PDP	T2A, 250V	--	UL
	Walter	TAP, ICP	T2A, 250V	--	UL
	Conquer	PTU	T2A, 250V	IEC/EN 60127-3	VDE
8. X-Capacitors (C1, C2) (Optional)(X1, X2 type)	Arcotronics	R.46	Max. 0.6μF 300V, 110°C	IEC 60384-14	ENEC(03), UL
	Arcotronics	R.49	Max. 0.6μF 310V, 110°C	IEC 60384-14	ENEC(03), UL
	Iskra	KNB 1530	Max. 0.6μF 275V, 100°C	IEC 60384-14	VDE, UL
	Iskra	KNB 1560	Max. 0.6μF 300V, 125°C	IEC 60384-14	VDE, UL
	Liow Gu	GS-L	Max. 0.6μF 275V, 100°C	IEC 60384-14	VDE, UL
	Pilkor	PCX2 335M	Max. 0.6μF 275V, 105°C	IEC 60384-14	ENEC14, UL
	Pilkor	PCX2 337	Max. 0.6μF 275V, 100°C	IEC 60384-14	VDE, UL

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
	EPCOS	B3292#	Max. 0.6 μ F 305V, 105°C	IEC 60384-14	VDE, UL
	Ultra Tech	HQX	Max. 0.6 μ F 275V, 100°C	IEC 60384-14	VDE, UL
	Cheng Tung	CTX	Max. 0.6 μ F 300V, 100°C	IEC 60384-14	VDE, UL
	Shiny Space	SX1	Max. 0.6 μ F 300V, 100°C	IEC 60384-14	VDE, UL
	Vishay	339	Max. 0.6 μ F 275V, 105°C	IEC 60384-14	ENEC(02), UL
9. Thermsitor (RTH1)(Optional)	--	--	Min. 3A, max. 15 Ω	--	--
10. Varistor (ZNR1)(Optional)	Centra Science	CNR-14D471K	300Vac, 385Vdc, 85°C	IEC 61051-2 CECC 42000 CECC 42200 CECC 42201 UL 1449	VDE, UL
	Joyin	14S471K 14N471K	300Vac, 385Vdc, 85°C	IEC 61051-2 CECC 42000 CECC 42200 CECC 42201 UL 1449	VDE, UL
	Nippon Chemi- Con	TNR14V471K	300Vac, 385Vdc, 85°C	IEC 61051-2 CECC 42000 CECC 42200 CECC 42201 UL 1449	VDE, UL
	Thinking	TVR10471-D TVR14471-D	300Vac, 385Vdc, 85°C	IEC 61051-2 CECC 42000 CECC 42200 CECC 42201 UL 1449	VDE, UL
11. Bridge Rectifer (BD1)	--	--	Min.2A, min. 600V	--	--
12. Storage capacitor (C5)	CAPXON	LP, LS, HS	82 μ F, min. 400V, min. 85°C	--	--
	HITACHI	HP3, HU4	82 μ F, min. 400V, min. 85°C	--	--
	RUBYCON	USR, MXG	82 μ F, min. 400V, min. 85°C	--	--

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
	INPPON CHEMI-CON	SMM, KMM	82µF, min. 400V, min. 85°C	--	--
13. Transistor (Q1)	--	--	Min. 5A, min. 500V	--	--
14. Photocoupler (U2, U3) (U2 optional used)	Lite-on	LTV-817	dti=0.8mm int. dcr=5.2mm ext. dcr=7.8mm 100°C	EN 60747-5-2 IEC 60950-1 IEC 60747-5-2 EN 60950-1	VDE, FI, UL, CUL, CSA
	NEC	PS2561-1 PS2561-2 PS2561-4	dti= 0.4mm, Int. dcr> 4mm, Ext. dcr= 7mm, 100°C	EN 60747-5-2 IEC 60950-1 IEC 60747-5-2 EN 60950-1	VDE, FI, UL
	Sharp	PC123	dti=0.7mm int. dcr=5mm ext. dcr=8mm, thermal cycling test, 110°C	EN 60747-5-2 IEC 60950-1 IEC 60747-5-2 EN 60950-1	VDE, FI, UL, CUL, CSA
	Cosmo	K1010	dti=0.7mm int. dcr=5.2mm ext. dcr=8mm, thermal cycling test, 115°C	EN 60747-5-2 IEC 60950-1 IEC 60747-5-2 EN 60950-1	VDE, FI, UL, CUL, CSA
15. Bridging Capacitor (C31) (Optional) (Y1 type)	Murata	KX	Max. 2200pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
	Walsin	AH	Max. 2200pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
	TDK	CD	Max. 2200pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
	Welson	WD	Max. 2200pF, Min. 250V, 125°C	IEC 60384-14	VDE, UL
16. Transformer (T1) For NES-35-5	Long Sail	TF-1238	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1238	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
	Yao Sheng	TF-1238	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1238	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NES-35-12	Long Sail	TF-1239	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1239	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1239	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1239	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NES-35-15	Long Sail	TF-1240	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1240	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1240	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1240	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
For NES-35-24	Long Sail	TF-1241	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1241	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1241	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1241	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NES-35-48	Long Sail	TF-1242	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1242	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1242	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1242	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NED-35A	Long Sail	TF-1243	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1243	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
	Yao Sheng	TF-1243	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1243	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NED-35B	Long Sail	TF-1244	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1244	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1244	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1244	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NET-35A	Long Sail	TF-1245	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1245	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1245	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1245	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
For NET-35B	Long Sail	TF-1246	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1246	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1246	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1246	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NET-35C	Long Sail	TF-1247	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1247	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Yao Sheng	TF-1247	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1247	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For NET-35D	Long Sail	TF-1248	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-1248	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland

IEC/EN 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
	Yao Sheng	TF-1248	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-1248	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For SCP-35-12	Long Sail	TF-5024	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-5024	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Elytone	TF-5024	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-5024	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
For SCP-35-24	Long Sail	TF-5025	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Jet Signal	TF-5025	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Elytone	TF-5025	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland
	Ten Well	TF-5025	Class B	Applicable parts in IEC 60950-1 and evaluated according to IEC 60085	Accepted by TÜV Rheinland

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

17. Line Filter (LF1) (Optional)	Mean Well	LF-158	120°C	--	--
18. Insulation Sheet (under main board)	--	--	V-2 or better, min. 0.2 mm thick, 105°C	UL94	UL

Note:

1. An asterisk indicates a mark that assures the agreed level of surveillance.

1.6.2	TABLE: Electrical data (in normal conditions)						P
U (V)/F(Hz)	I (A)	I _{rated} (A)	P (W)	Fuse #	I _{fuse} (A)	Condition/status	
Model: NES-35-5							
90/ 50Hz	0.89	--	47.2	FS1	0.89	Maximum normal load	
100/ 50Hz	0.81	0.9	46.3	FS1	0.81	Maximum normal load	
240/ 50Hz	0.42	0.9	44.1	FS1	0.42	Maximum normal load	
264/ 50Hz	0.39	--	44.2	FS1	0.39	Maximum normal load	
90/ 60Hz	0.91	--	47.1	FS1	0.91	Maximum normal load	
100/ 60Hz	0.83	0.9	46.4	FS1	0.83	Maximum normal load	
240/ 60Hz	0.42	0.9	44.1	FS1	0.42	Maximum normal load	
264/ 60Hz	0.39	--	44.1	FS1	0.39	Maximum normal load	
Model: NES-35-12							
90/ 50Hz	0.82	--	45.0	FS1	0.82	Maximum normal load	
100/ 50Hz	0.75	0.9	44.5	FS1	0.75	Maximum normal load	
240/ 50Hz	0.40	0.9	43.1	FS1	0.40	Maximum normal load	
264/ 50Hz	0.37	--	43.2	FS1	0.37	Maximum normal load	
90/ 60Hz	0.83	--	45.0	FS1	0.83	Maximum normal load	
100/ 60Hz	0.76	0.9	44.5	FS1	0.76	Maximum normal load	
240/ 60Hz	0.40	0.9	43.2	FS1	0.40	Maximum normal load	
264/ 60Hz	0.37	--	43.2	FS1	0.37	Maximum normal load	
Model: NES-35-15							
90/ 50Hz	0.80	--	43.9	FS1	0.80	Maximum normal load	
100/ 50Hz	0.73	0.9	43.4	FS1	0.73	Maximum normal load	
240/ 50Hz	0.39	0.9	42.2	FS1	0.39	Maximum normal load	
264/ 50Hz	0.36	--	42.3	FS1	0.36	Maximum normal load	

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
90/ 60Hz	0.81	--	43.9	FS1	0.81	Maximum normal load
100/ 60Hz	0.74	0.9	43.5	FS1	0.74	Maximum normal load
240/ 60Hz	0.39	0.9	42.2	FS1	0.39	Maximum normal load
264/ 60Hz	0.37	--	42.3	FS1	0.37	Maximum normal load
Model: NES-35-24						
90/ 50Hz	0.77	--	42.4	FS1	0.77	Maximum normal load
100/ 50Hz	0.71	0.9	42.0	FS1	0.71	Maximum normal load
240/ 50Hz	0.38	0.9	41.0	FS1	0.38	Maximum normal load
264/ 50Hz	0.36	--	41.1	FS1	0.36	Maximum normal load
90/ 60Hz	0.79	--	42.3	FS1	0.79	Maximum normal load
100/ 60Hz	0.72	0.9	41.9	FS1	0.72	Maximum normal load
240/ 60Hz	0.38	0.9	41.0	FS1	0.38	Maximum normal load
264/ 60Hz	0.36	--	41.1	FS1	0.36	Maximum normal load
Model: NES-35-48						
90/ 50Hz	0.81	--	45.0	FS1	0.81	Maximum normal load
100/ 50Hz	0.74	0.9	44.5	FS1	0.74	Maximum normal load
240/ 50Hz	0.40	0.9	43.7	FS1	0.40	Maximum normal load
264/ 50Hz	0.38	--	43.9	FS1	0.38	Maximum normal load
90/ 60Hz	0.82	--	45.0	FS1	0.82	Maximum normal load
100/ 60Hz	0.76	0.9	44.5	FS1	0.76	Maximum normal load
240/ 60Hz	0.40	0.9	43.7	FS1	0.40	Maximum normal load
264/ 60Hz	0.48	--	43.8	FS1	0.48	Maximum normal load
Model: NED-35A						
90/ 50Hz	0.76	--	41.8	FS1	0.76	Maximum normal load
100/ 50Hz	0.70	0.9	41.2	FS1	0.70	Maximum normal load
240/ 50Hz	0.37	0.9	39.8	FS1	0.37	Maximum normal load
264/ 50Hz	0.35	--	39.7	FS1	0.35	Maximum normal load
90/ 60Hz	0.77	--	41.7	FS1	0.77	Maximum normal load
100/ 60Hz	0.71	0.9	41.1	FS1	0.71	Maximum normal load
240/ 60Hz	0.37	0.9	39.8	FS1	0.37	Maximum normal load
264/ 60Hz	0.35	--	39.7	FS1	0.35	Maximum normal load
Model: NED-35B						
90/ 50Hz	0.81	--	44.5	FS1	0.81	Maximum normal load

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
100/ 50Hz	0.74	0.9	43.9	FS1	0.74	Maximum normal load
240/ 50Hz	0.40	0.9	42.5	FS1	0.40	Maximum normal load
264/ 50Hz	0.37	--	42.6	FS1	0.37	Maximum normal load
90/ 60Hz	0.81	--	44.5	FS1	0.81	Maximum normal load
100/ 60Hz	0.76	0.9	44.0	FS1	0.76	Maximum normal load
240/ 60Hz	0.40	0.9	42.5	FS1	0.40	Maximum normal load
264/ 60Hz	0.37	--	42.5	FS1	0.37	Maximum normal load
Model: NET-35A						
90/ 50Hz	0.71	--	38.7	FS1	0.71	Maximum normal load
100/ 50Hz	0.65	0.9	38.1	FS1	0.65	Maximum normal load
240/ 50Hz	0.35	0.9	37.2	FS1	0.35	Maximum normal load
264/ 50Hz	0.32	--	37.6	FS1	0.32	Maximum normal load
90/ 60Hz	0.72	--	38.6	FS1	0.72	Maximum normal load
100/ 60Hz	0.66	0.9	38.1	FS1	0.66	Maximum normal load
240/ 60Hz	0.35	0.9	37.2	FS1	0.35	Maximum normal load
264/ 60Hz	0.33	--	37.4	FS1	0.33	Maximum normal load
Model: NET-35B						
90/ 50Hz	0.78	--	42.4	FS1	0.78	Maximum normal load
100/ 50Hz	0.72	0.9	41.9	FS1	0.72	Maximum normal load
240/ 50Hz	0.39	0.9	40.6	FS1	0.39	Maximum normal load
264/ 50Hz	0.36	--	40.7	FS1	0.36	Maximum normal load
90/ 60Hz	0.80	--	42.4	FS1	0.80	Maximum normal load
100/ 60Hz	0.73	0.9	42.0	FS1	0.73	Maximum normal load
240/ 60Hz	0.39	0.9	40.5	FS1	0.39	Maximum normal load
264/ 60Hz	0.36	--	40.7	FS1	0.36	Maximum normal load
Model: NET-35C						
90/ 50Hz	0.82	--	45.2	FS1	0.82	Maximum normal load
100/ 50Hz	0.76	0.9	44.7	FS1	0.76	Maximum normal load
240/ 50Hz	0.41	0.9	43.1	FS1	0.41	Maximum normal load
264/ 50Hz	0.37	--	44.0	FS1	0.37	Maximum normal load
90/ 60Hz	0.84	--	45.3	FS1	0.84	Maximum normal load
100/ 60Hz	0.77	0.9	44.5	FS1	0.77	Maximum normal load
240/ 60Hz	0.41	0.9	43.0	FS1	0.41	Maximum normal load

IEC/EN 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
264/ 60Hz	0.38	--	43.6	FS1	0.38	Maximum normal load
Model: NET-35D						
90/ 50Hz	0.85	--	47.4	FS1	0.85	Maximum normal load
100/ 50Hz	0.78	0.9	46.6	FS1	0.78	Maximum normal load
240/ 50Hz	0.43	0.9	44.8	FS1	0.43	Maximum normal load
264/ 50Hz	0.39	--	44.8	FS1	0.39	Maximum normal load
90/ 60Hz	0.87	--	47.1	FS1	0.87	Maximum normal load
100/ 60Hz	0.80	0.9	46.4	FS1	0.80	Maximum normal load
240/ 60Hz	0.43	0.9	44.8	FS1	0.43	Maximum normal load
264/ 60Hz	0.40	--	44.8	FS1	0.40	Maximum normal load
Model: SCP-35-12						
90/ 50Hz	0.83	--	46.0	FS1	0.83	13.8V, 2.6A
100/ 50Hz	0.76	0.75	46.0	FS1	0.76	13.8V, 2.6A
240/ 50Hz	0.40	0.75	44.0	FS1	0.40	13.8V, 2.6A
254/ 50Hz	0.39	--	44.0	FS1	0.39	13.8V, 2.6A
264/ 50Hz	0.37	--	44.0	FS1	0.37	13.8V, 2.6A
90/ 60Hz	0.83	--	46.0	FS1	0.83	13.8V, 2.6A
100/ 60Hz	0.77	0.75	46.0	FS1	0.77	13.8V, 2.6A
240/ 60Hz	0.40	0.75	44.0	FS1	0.40	13.8V, 2.6A
254/ 60Hz	0.39	--	44.0	FS1	0.39	13.8V, 2.6A
264/ 60Hz	0.38	--	44.0	FS1	0.38	13.8V, 2.6A
Model: SCP-35-24						
90/ 50Hz	0.80	--	45.0	FS1	0.80	27.6V, 1.4A
100/ 50Hz	0.74	0.75	44.0	FS1	0.74	27.6V, 1.4A
240/ 50Hz	0.39	0.75	43.0	FS1	0.39	27.6V, 1.4A
254/ 50Hz	0.38	--	43.0	FS1	0.38	27.6V, 1.4A
264/ 50Hz	0.37	--	43.0	FS1	0.37	27.6V, 1.4A
90/ 60Hz	0.81	--	45.0	FS1	0.81	27.6V, 1.4A
100/ 60Hz	0.75	0.75	44.0	FS1	0.75	27.6V, 1.4A
240/ 60Hz	0.40	0.75	43.0	FS1	0.40	27.6V, 1.4A
254/ 60Hz	0.38	--	43.0	FS1	0.38	27.6V, 1.4A
264/ 60Hz	0.37	--	43.0	FS1	0.37	27.6V, 1.4A
Supplementary information:						

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
For model: NES-35 (PCB: NES-35)							
Functional:							
Line trace to Neutral trace before fuse (FS1)	420	250	1.5	2.6	2.5	2.6	
Reinforced:							
Primary components (with 10N) to secondary components (with 10N)	420	250	4.0	See below	5.0	See below	
▪ C4 to C129				5.1		5.5	
Primary trace to secondary trace	420	250	4.0	See below	5.0	See below	
▪ pri, trace of C7 to sec. trace of C31				5.4		10	
▪ pri, trace of C30 to sec. trace of C31				6.0		6.0	
▪ Under U2/U3				6.1		6.1	
▪ U1 pri. trace to T1 pin 6 (sec.)	556	257	4.4	6.0	5.4	6.0	
▪ Under T1	556	257	4.4	11.4	5.4	11.4	
Basic / supplementary:							
Between parts need basic insulation	420	250	2.0	See below	2.5	See below	
▪ D1 to Core of T1				2.6		2.6	
▪ R21 to Core of T1				5.0		5.0	
▪ U2 pri. pin to Core of T1				3.0		3.0	
▪ U2 sec. pin to Core of T1				4.0		4.0	
▪ C3 to C106 (470uF)				2.1		3.0	
Primary components (with 10N) to earth parts	420	250	2.0	See below	2.5	See below	
▪ Line / Neutral trace to PE				2.7		2.7	
▪ C5 to top metal enclosure				3.2		3.2	
▪ RTH1 to metal enclosure				4.0		6.0	
▪ C5 body to PB screw				* 5)		* 5)	

IEC/EN 60950-1						
Clause	Requirement + Test			Result - Remark	Verdict	
▪ SCR1 to metal enclosure				4.6		5.4
▪ C37 to metal enclosure				2.8		2.8
Primary trace to earthing trace (PE)	420	250	2.0	See below	2.5	See below
▪ Neutral trace to PE trace (R1 to C129)				2.6		2.6
▪ C39 trace to metal enclosure				2.6		2.6
For model: NES-35 (PCB: NES-35A)						
Basic / supplementary:						
Between parts need basic insulation	420	250	2.0	See below	2.5	See below
▪ C3 to C106 (2200uF)				2.1		5.5
For model: NED-35 (PCB: NED-35)						
Functional:						
Line trace to Neutral trace before fuse (FS1)	420	250	1.5	2.6	2.5	2.6
Basic / supplementary:						
Between parts need basic insulation	420	250	2.0	See below	2.5	See below
▪ D1 to Core of T1				2.6		2.6
▪ R21 to Core of T1				5.0		5.0
▪ U2 pri. pin to Core of T1				3.0		3.0
▪ U2 sec. pin to Core of T1				4.0		4.0
▪ C3 to R200				6.0		6.0
Primary components (with 10N) to metal chassis (PE)	420	250	2.0	See below	2.5	See below
▪ C5 to top metal enclosure				3.2		3.2
▪ RTH1 to metal enclosure				6.0		7.0
▪ C5 to PB screw				* 5)		* 5)
▪ SCR1 to metal enclosure				4.6		5.4
▪ C37 to metal enclosure				2.8		2.8
Primary trace to earthing trace (PE)	420	250	2.0	See below	2.5	See below
▪ Neutral trace to PE trace (R1 to C129)				2.6		2.6

IEC/EN 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict

▪ C39 trace to metal enclosure				2.6		2.6
--------------------------------	--	--	--	-----	--	-----

Reinforced:

Primary components (with 10N) to secondary components (with 10N)	420	250	4.0	See below	5.0	See below
--	-----	-----	-----	-----------	-----	-----------

▪ R1 to C129				6		6
--------------	--	--	--	---	--	---

Primary trace to secondary trace	420	250	4.0	See below	5.0	See below
----------------------------------	-----	-----	-----	-----------	-----	-----------

▪ pri, trace of C7 to sec. trace of C31				4.9		10
---	--	--	--	-----	--	----

▪ pri, trace of C30 to sec. trace of C31				5.6		5.6
--	--	--	--	-----	--	-----

▪ Under U2/U3				6.1		6.1
---------------	--	--	--	-----	--	-----

▪ U1 pri. trace to T1 pin 6 (sec.)	420	253	4.0	6.0	5.2	6.0
------------------------------------	-----	-----	-----	-----	-----	-----

▪ Under T1	420	253	4.0	11.4	5.2	11.4
------------	-----	-----	-----	------	-----	------

For model: NED-35 (PCB: NED-35A)

Basic / supplementary:

▪ C1 to C129	420	250	2.0	5.5	2.5	5.5
--------------	-----	-----	-----	-----	-----	-----

▪ C4 to C129	420	250	2.0	4.5	2.5	5.5
--------------	-----	-----	-----	-----	-----	-----

For model: NET-35 (PCB: NET-35)

Functional:

Line trace to Neutral trace before fuse (FS1)	420	250	1.5	2.6	2.5	2.6
---	-----	-----	-----	-----	-----	-----

Basic / supplementary:

Between parts need basic insulation	420	250	2.0	See below	2.5	See below
-------------------------------------	-----	-----	-----	-----------	-----	-----------

▪ D300 to Core of T1				2.1		7.5
----------------------	--	--	--	-----	--	-----

▪ D1 to Core of T1				2.1		7.5
--------------------	--	--	--	-----	--	-----

▪ R21 to Core of T1				5.0		5.0
---------------------	--	--	--	-----	--	-----

▪ U2 pri. pin to Core of T1				3.0		3.0
-----------------------------	--	--	--	-----	--	-----

▪ U2 sec. pin to Core of T1				4.0		4.0
-----------------------------	--	--	--	-----	--	-----

▪ C4 to C306 (100uF)				2.1		10
----------------------	--	--	--	-----	--	----

▪ C30 to C305 (220uF)				3.0		4.0
-----------------------	--	--	--	-----	--	-----

Primary components (with 10N) to metal chassis (PE)	420	250	2.0	See below	2.5	See below
---	-----	-----	-----	-----------	-----	-----------

IEC/EN 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
▪ C5 to top metal enclosure				3.2		3.2
▪ RTH1 to metal enclosure				4.6		5.2
▪ C5 to PB screw				* 5)		* 5)
▪ SCR1 to metal enclosure				4.5		5.0
▪ C37 to metal enclosure				2.8		2.8
Primary trace to earthing trace (PE)	420	250	2.0	See below	2.5	See below
▪ Neutral trace to PE trace (R1 to C129)				2.6		2.6
▪ C39 trace to metal enclosure				2.6		2.6
Reinforced:						
Primary components (with 10N) to secondary components (with 10N)	420	250	4.0	See below	5.0	See below
▪ Primary components to secondary components				4.2		5.2
Primary trace to secondary trace	420	250	4.0	See below	5.0	See below
▪ pri, trace of C7 to sec. trace of C31				4.7		10
▪ pri, trace of C30 to sec. trace of C31				5.5		7.5
▪ Under U2/U3				6.2		6.2
▪ U1 pri. trace to T1 pin 6 (sec.)	468	263	4.2	6.0	5.4	6.0
▪ Under T1	468	263	4.2	11.4	5.4	11.4
For model: SCP-35-z (z= 12, 24)						
Functional:						
Distance between Line and neutral before fuse or under fuse	420	250	1.5	See below	2.5	See below
- Trace under FS1				6.0		6.0
- L to N trace before FS1				2.9		2.9
Basic / supplementary:						
Primary trace to earthed trace (PB)	420	250	2.0	See below	2.5	See below

IEC/EN 60950-1						
Clause	Requirement + Test			Result - Remark	Verdict	
- TB1 neutral trace to earth trace				2.8		2.8
- TB1 Line trace to earth trace				3.2		4.3
- under C22				3.1		4.3
- under C4/C3/C30				2.9		4.4
- under C23				4.2		4.2
- under C29				4.0		4.0
- C5 trace to earth trace				3.8		3.8
- C36 trace to screw hole				3.5		3.5
Basic / supplementary:						
Primary components (with 10N) to earth component/trace	420	250	2.0	See below	2.5	See below
- C5 to metal chassis				3.0		3.0
- C5 to screw				2.6		2.6
- C39 to metal chassis				3.2		3.2
- U3 primary trace to metal chassis				3.7		3.7
- L/N screw of TB1 to metal chassis				2.6		2.6
Basic / supplementary:						
Floating components to primary/secondary components (with 10N)	420	250	2.0	See below	2.5	See below
- T1 core to R21				2.6		2.6
- T1 core to U2 primary pin				3.6		3.6
- T1 core to R126				2.6		2.6
- T1 core to D6				2.6		2.6
Reinforced:						
Primary trace to secondary trace	420	250	4.0	See below	5.0	See below
- U2/U3				6.1		6.1
- under C31				6.7		6.7
- Primary trace to C31 secondary trace				5.2		7.7
- Primary trace to T1 pin 6/7 secondary trace				6.1		6.1

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

- under T1	440	260	4.2	11.8	5.4	11.8
<p>Supplementary information:</p> <ol style="list-style-type: none"> Functional insulation shorted, see 5.3.4. See below for NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D): Glued components (safety relevant): For PCB#NES-35: C129 on TB1, C22 on C1, C3 on LF1, C37, SR1, R7 on PCB For PCB#NES-35A: C129 on TB1, C22 on C1, C3 on LF1, C37, SR1, R7 on PCB For PCB#NED-35: C129 on TB1, C22 on C1, C37, SR1, R7 on PCB For PCB#NED-35A: C22 on TB1, C129 on L200, C37, SR1, R7 on PCB For PCB#NET-35: C129 on TB1, C22 on C1, between C3 C30 and LF1, C37, SR1, R7 on PCB For PCB#NET-35A: between C22 and C129, C3 on C30 and C4, SR1 on PCB Tubed components (safety relevant): For NES-35 series: None. For NED-35 series: L200 For NET-35 series: L200, L300. Component not carry on PCB: For NES-35 series: C22, C23, C29, C38, C106, C107. For NED-35 series: C22, C23, C29, C38. For NET-35 series: C23. The plastic sleeve of electrolytic capacitor used as basic insulation, which in compliance with electric strength test at 3000VAC. One insulation sheet (95x95mm, 0.5mm thickness) is placed between PCB and bottom metal enclosure. One cut slot (8.0x1.9mm) is present between C31 and C7 body. See below for SCP-35-z (z= 12, 24): Functional insulation shorted, see 5.3.4. One groove under C22, the dimension is 1.5 x 6.4mm. One groove under C4/C3/C30, the dimension is 1.5 x 13.1mm. One groove between TB1 Line trace to earth trace, the dimension is 1.5 x 4.5mm. One groove between primary trace to C31 secondary trace, the dimension is 1.8 x 8.0mm. Glued components (safety relevant): C36, C129, C40, C37, R21 There is one insulation sheet provide on under main board separated primary to earth parts for keep basic insulation. 						

2.10.5	TABLE: Distance through insulation measurements					P
Distance through insulation (DTI) at/of:	U peak (V)	U r.m.s. (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)	
Photo Coupler (reinforce insulation)	420	250	AC 3000	1)	1)	
One layer of insulation tape used for T1: 0.05mm (reinforce insulation)	420	250	AC 3000	--	--	
C5: Plastic sleeve (basic insulation)	420	250	AC 2000	--	--	
Insulation sheet under main board (basic insulation)	420	250	AC 1500	--	--	

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

1) For details refer to table 1.5.1.

4.3.8	TABLE: Batteries								N/A	
The tests of 4.3.8 are applicable only when appropriate battery data is not available										
Is it possible to install the battery in a reverse polarity position?										
	Non-rechargeable batteries			Rechargeable batteries						
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging		
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	
Max. current during normal condition										
Max. current during fault condition										
Test results:										
- Chemical leaks										
- Explosion of the battery										
- Emission of flame or expulsion of molten metal										
- Electric strength tests of equipment after completion of tests										
Verdict										
Supplementary information:										

4.5	TABLE: Thermal requirements			P
	Supply voltage (V)	See below.		—
	Ambient T _{min} (°C)	See below.		—
	Ambient T _{max} (°C)	See below.		—
Maximum measured temperature T of part/at::		T (°C)		Allowed T _{max} (°C)
Model: NES-35-5				
Test voltage		90V	264V	--
TB1 body (terminal block)		57.3	48.9	--
C1 body (X cap.)		63.3	56.8	100

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
LF1 coil		78.7 / 54.1	120
C2 body (X cap.)		82.4 / 72.4	100
PCB under BD1		80.8 / 60.3	130
C5 body		79.8 / 65.5	85
C3 body		77.8 / 69.8	85
C4 body		71.3 / 64.9	85
HS1 body near Q1		104.7 / 85.3	130
T1 primary side coil		99.1 / 85.3	110
T1 secondary side coil		105.9 / 98.5	110
T1 core		90.0 / 94.9	110
U2 body (photo coupler)		80.0 / 77.5	100
HS2 body near D100		82.0 / 96.9	130
PCB under RTH1		97.0 / 65.3	130
L100 coil		79.5 / 79.9	105
Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 26.2 / 23.3	45.0	45.0	--
TB1 (primary connector)	49.0	--	105
C7 body	55.0	--	85
Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 25.6	45.0	--	--
Model: NES-35-24			
Test voltage		90V	--
TB1 body (terminal block)		49.8	--
C1 body (X cap.)		56.0	100
LF1 coil		75.8	120
C2 body (X cap.)		72.5	100
PCB under BD1		69.0	130
C5 body		69.9	85
C3 body		65.6	85
C4 body		61.0	85
HS1 body near Q1		69.8	130
T1 primary side coil		70.7	110

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	T1 secondary side coil	75.4	110
	T1 core	66.4	110
	U2 body (photo coupler)	61.4	100
	HS2 body near D100	76.2	130
	PCB under RTH1	69.4	130
	L100 coil	90.8	105
	Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 25.6	45	--
Model: NES-35-48			
	Test voltage	90V	--
	TB1 body (terminal block)	49.2	--
	C1 body (X cap.)	55.9	100
	LF1 coil	77.0	120
	C2 body (X cap.)	77.3	100
	PCB under BD1	65.2	130
	C5 body	69.8	85
	C3 body	61.7	85
	C4 body	58.5	85
	C7 body	51.2	85
	HS1 body near Q1	78.6	130
	T1 primary side coil	78.5	110
	T1 secondary side coil	74.7	110
	T1 core	69.6	110
	U2 body (photocouple)	62.4	100
	HS2 body near D100	66.6	130
	PCB under RTH1	73.9	130
	L100 coil	55.3	105
	Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 24.9	45.0	--
Model: NED-35B			
	Test voltage	90V	264V
	TB1 body (terminal block)	53.0	51.6

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
C1 body (X cap.)	59.9	56.6	100
LF1 coil	79.8	64.0	120
C2 body	81.1	68.9	100
C5 body	65.5	64.1	85
C3 body (Y cap.)	71.9	64.6	85
C4 body (Y cap.)	66.4	61.6	85
PCB under BD1	63.2	59.5	130
PCB under RTH1	71.9	61.7	130
HS1 body near Q1	72.2	80.2	130
T1 primary-side coil	76.7	83.5	110
T1 secondary-side coil	87.2	80.4	110
T1 core	76.8	87.4	110
U2 body	62.4	67.5	100
HS2 body near D100	90.0	91.8	130
L100 coil	73.0	71.4	105
Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 23.2 / 23.1	45.0	45.0	--
Model: NET-35-B			
Test voltage		90V	--
TB1 body (terminal block)		49.2	--
C1 body (X cap.)		55.1	100
LF1 coil		81.9	120
C2 body (X cap.)		85.9	100
PCB under BD1		73.3	130
C5 body		71.3	85
C3 body		69.1	85
C4 body		64.1	85
HS1 body near Q1		60.7	130
T1 primary side coil		93.8	110
T1 secondary side coil		96.8	110
T1 core		76.8	110
U2 body (photo coupler)		70.1	100
HS2 body near D100		89.6	130

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	PCB under RTH1	78.8	130
	L100 coil	80.8	105
	Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 24.7	45	--
Model: NET-35-C			
	Test voltage	90V 264V	--
	TB1 body (terminal block)	48.5 47.0	--
	C1 body (X cap.)	54.7 51.3	100
	LF1 coil	76.1 59.1	120
	C2 body (X cap.)	85.9 68.5	100
	PCB under BD1	72.3 62.9	130
	C5 body	70.4 61.9	85
	C3 body (Y cap.)	65.3 59.8	85
	C4 body (Y cap.)	79.9 64.9	85
	HS1 body near Q1	78.0 63.1	130
	T1 primary-side coil	88.3 83.5	110
	T1 secondary-side coil	92.7 89.2	110
	T1 core	97.1 93.9	110
	U2 body	85.6 82.2	100
	HS2 body near D100	68.3 66.6	130
	PCB under RTH1	95.7 92.9	130
	L100 coil	74.7 73.2	105
	Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 25.4 / 24.9	45.0 45.0	--
Model: NET-35-D			
	Test voltage	90V 264V	--
	TB1 body (terminal block)	48.5 47.0	--
	C1 body (X cap.)	54.7 51.3	100
	LF1 coil	76.1 59.1	120
	C2 body (X cap.)	85.9 68.5	100
	PCB under BD1	72.3 62.9	130
	C5 body	70.4 61.9	85

IEC/EN 60950-1				
Clause	Requirement + Test	Result - Remark	Verdict	
	C3 body (Y cap.)	65.3	59.8	85
	C4 body (Y cap.)	79.9	64.9	85
	HS1 body near Q1	78.0	63.1	130
	T1 primary-side coil	88.3	83.5	110
	T1 secondary-side coil	92.7	89.2	110
	T1 core	97.1	93.9	110
	U2 body	85.6	82.2	100
	HS2 body near D100	68.3	66.6	130
	PCB under RTH1	95.7	92.9	130
	L100 coil	74.7	73.2	105
	Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 25.9 / 24.9	45.0	45.0	--
Model: SCP-35-12 with top chassis				
	Test voltage	90V	264V	--
	TB1 body	56.7	55.8	--
	C1 body	64.9	62.5	100
	LF1 coil	85.9	69.9	120
	C30 body	78.9	72.2	125
	PCB near RTH1	86.1	72.2	130
	C2 body	84.7	73.2	100
	PCB near BD1	89.7	78.0	130
	C5 body	82.3	72.9	85
	HS1 body of Q1	87.1	84.5	130
	T1 primary side coil	91.8	90.7	110
	T1 secondary side coil	89.1	87.3	110
	T1 core	86.5	86.9	110
	U2 body	77.5	77.0	100
	HS2 body of D100	94.8	93.8	130
	Metal enclosure	61.9	61.4	--
	Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 22.4 / 21.7	50.0	50.0	--
Model: SCP-35-24 with top chassis				
	Test voltage	90V	264V	--

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

TB1 body	52.3	51.9	--
C1 body	63.5	60.5	100
LF1 coil	83.3	66.1	120
C30 body	73.4	67.2	125
PCB near RTH1	92.8	74.6	130
C2 body	80.7	68.2	100
PCB near BD1	85.6	74.0	130
C5 body	79.4	68.8	85
HS1 body of Q1	87.0	84.5	130
T1 primary side coil	87.9	86.7	110
T1 secondary side coil	86.5	85.6	110
T1 core	79.7	81.5	110
U2 body	72.9	72.7	100
HS2 body of D100	77.4	77.1	130
Metal enclosure	60.2	59.8	--
Max. ambient temperature Tma (°C): Note: ambient air during test were Tamb (°C) = 25.5 / 25.4	50.0	50.0	--

Supplementary information:

Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class

Supplementary information:

- The temperatures were measured under worst normal mode defined in 1.2.2.1 and as described in sub-clause 1.6.2 and at voltages as described above.
- The maximum ambient temperature permitted by the manufacturer's specification is 45°C for NEx-35y and 50°C for SCP-35-z.
- All values for T(°C) are re-calculated from actual ambient respectively.
Example: The max. ambient temperature Tma is defined at 45°C. Therefore the maximum temperatures measured are recalculated from actual ambient as follows: T + (45 – Tamb) where T is the maximum temperature measured during test and Tamb is the ambient temperature during test.
- Winding components (providing safety isolation):
- Class B: Tmax = 120°C – 10°C = 110°C
- For the load conditions, see supplementary information of appended table 1.6.2.
- The heating tests have been performed on the components side is upward.

4.5.5	TABLE: Ball pressure test of thermoplastic parts	P
	Allowed impression diameter (mm): ≤ 2 mm	—

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Part	Test temperature (°C)	Impression diameter (mm)
Terminal Block, Dinkle # DT-4 series, 1.4mm	125	1.1
Terminal Block, Dinkle # DT-43 series, 1.4mm	125	1.1
Terminal Block, Dinkle # DT-45 series, 1.4mm	125	1.0
Terminal Block, Dinkle # DT-49 series, 1.4mm	125	1.1
Terminal Block, Howder # HB-95 series, 1.4mm	125	1.0
Terminal Block, Howder # HI-20 series, 1.4mm	125	1.0
Terminal Block, Switchlab # T14 series, 1.4mm	125	1.1
Terminal Block, Switchlab # T24 series, 1.4mm	125	1.1
Terminal Block, Switchlab # T34 series, 1.4mm	125	1.4
Terminal Block, Switchlab # T35 series, 1.4mm	125	1.0
Terminal Block, Switchlab # T44 series, 1.4mm	125	1.0
Terminal Block, JITE # BTB-654 series, 1.4mm	125	1.1
Terminal Block, Dinkle # EK-950 series, 1.4mm x2	125	0.8
Terminal Block, Switchlab # MB910 series, 1.4mm x2	125	1.5
Primary Connector, Taiwan King Pin # P-8950I Series, 0.96mm	125	1.5
Bobbin of LF1, Chang Chun, #PBT-4115	125	1.1

Supplementary information:

1) Phenolic material were used in bobbin materials of Transformer (T1) is accepted without test.

4.7	Table: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	

Supplementary information:

For details refer to table 1.5.1.

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests	P
-----	---	---

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Basic / supplementary:			
Unit: primary and earth (for all models)	DC	2700	No
T1: Primary winding to core (for NEx-35y)	AC	1900	No
T1: Secondary winding to core (for NEx-35y)	AC	1900	No
T1: Primary winding to core (for SCP-35-z)	AC	1900	No
T1: Secondary winding to core (for SCP-35-z)	AC	1900	No
Reinforced:			
Unit: primary and secondary (for all models)	DC	4242	No
T1: primary winding and secondary windings (for NEx-35y)	AC	3000	No
T1: primary winding and secondary windings (for SCP-35-z)	AC	3000	No
Supplementary information:			

5.3	TABLE: Fault condition tests					P
	Ambient temperature (°C)				See below or 26°C.	—
	Power source for EUT: Manufacturer, model/type, output rating				--	—
Component No.	Fault	Supply voltage (Vac)	Test time	Fuse #	Fuse current (A)	Observation
Model: NES-35-5						
U1 pin 2 – 8	s-c	240	1 s	FS1	--	Fuse opened, no hazard.
T1 pin 1 to pin 2	s-c	240	3 hr	FS1	0.21	Unit cycle protection, no hazard. Temp. stable at T1=145°C, ambient=25°C.
T1 pin 6, 7, 8 to pin 9, 10	s-c	240	10 min	FS1	0.03	Unit shutdown, no hazard.
Vent	blocked	240	3 hr	FS1	0.46	Unit cycle protection, no hazard. T1= 127.2°C, ambient= 23.9°C.
T1 (pin 9,10) After D100 +5V	o-l	240	6 hr	FS1	0.49	Temp. stable at 11.5A, increased to 12.5A, unit shutdown, no hazard. T1= 125°C, ambient= 26.3°C.

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
+5V-RTN	s-c	240	3 hr	FS1	0.21	Unit cycle protection, no hazard. T1= 61.4°C, ambient= 24.5°C.
+5V-RTN	s-c	90	3 hr	FS1	0.41	Unit cycle protection, no hazard. T1= 54.2°C, ambient= 24.5°C.
+5V	o-l	240	4 hr	FS1	0.46	Temp. stable at 11A, increased to 12.5A. Unit shutdown, no hazard. T1= 122°C, ambient= 26.2°C.
Model: NES-35-48						
U1 pin 2 – 8	s-c	240	1 s	FS1	--	Fuse opened, no hazard.
BD1 L - (+)	s-c	240	1 s	FS1	--	Fuse opened, no hazard.
C5	s-c	240	1 s	FS1	--	Fuse opened, no hazard.
Q1 (G - D)	s-c	240	1 s	FS1	--	Fuse opened, Q1 damaged, no hazard.
Q1 (D - S)	s-c	240	1 s	FS1	--	Fuse opened, Q1 damaged, no hazard.
Q1 (G - S)	s-c	240	10 min	FS1	0.04	Unit shutdown, no hazard.
U2 pri. pins	s-c	240	10 min	FS1	0.05	Unit shutdown, no hazard.
U2 sec. pins	s-c	240	10 min	FS1	0.05	Unit shutdown, no hazard.
U2 pin 1	s-c	240	10 min	FS1	0.04	Unit shutdown, no hazard.
U3 pri. pins	s-c	240	10 min	FS1	0.05	Unit shutdown, no hazard.
U3 sec. pins	s-c	240	10 min	FS1	0.38	Normal operation, no high temperature, no hazard.
U3 pin 1	o-c	240	10 min	FS1	0.05	Unit shutdown, no hazard.
T1 pin 1 to pin 2	s-c	240	3 hr	FS1	0.25	Unit cycle protection, no hazard. T1= 76°C, ambient= 25°C
T1 pin 6, 7, 8 to pin 9, 10	s-c	240	10 min	FS1	0.04	Unit shutdown, no hazard.
Ventilation	blocked	240	3 hr	FS1	0.38	Temperature were stable, no hazard. T1= 70.2°C, ambient= 23.9°C
T1 (pin 9,10) After D100 +48V	o-l	240	6 hr	FS1	0.58	Temp. stable at 1.5A, increased to 1.7A, unit shutdown, no hazard. T1= 84°C, ambient= 26.3°C
+48V-RTN	s-c	240	3 hr	FS1	0.28	Unit cycle protection, no hazard. T1= 76°C, ambient= 24.5°C

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
+48	o-l	240	4 hr	FS1	0.54	Temp. stable at 1.44A, increased to 1.6A. Unit shutdown, no hazard. T1= 82°C, ambient= 26.2°C
Model: NED-35B						
T1 pin 1 to pin 2	s-c	240	4 hr	FS1	0.18	Unit shutdown, no hazard. T1= 63°C, ambient= 26°C
T1 pin 6 to pin 10	s-c	240	4 hr	FS1	0.25	Unit cycle protection, no hazard. T1= 56°C, ambient= 26°C
T1 pin 9 to pin 7,8	s-c	240	4 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 57°C, ambient= 27°C
Vent	blocked	240	5 hr	FS1	0.36	Temperature were stable, no hazard. T1= 87°C, ambient= 30.7°C
T1 (pin 9) After D100 +5V	o-l	240	6 hr	FS1	0.45	Temp. stable at 5.5A, increased to 6A, unit shutdown, no hazard. T1= 83°C, ambient= 25.6°C
T1 (pin 6) After D200 +24V	o-l	240	6 hr	FS1	0.43	Temp. stable at 1.7A, increased to 1.9A, unit shutdown, no hazard. T1= 86°C, ambient= 27°C
V1-RTN	s-c	240	4 hr	FS1	0.23	Unit cycle protection, no hazard. T1= 49°C, ambient= 29.4°C
V2-RTN	s-c	240	4 hr	FS1	0.16	Unit cycle protection, no hazard. T1= 62°C, ambient= 27.9°C
V1-V2	s-c	240	4 hr	FS1	0.16	Unit cycle protection, no hazard. T1= 63°C, ambient= 30.1°C
+5V	o-l	240	4 hr	FS1	0.42	Temp. stable at 5A, increased to 6A, unit shutdown. T1= 80°C, ambient= 25.5°C
+24	o-l	240	2 hr	FS1	0.42	Temp. stable at 1.6A, increased to 1.9A, unit shutdown, no hazard. T1= 83°C, ambient= 26.8°C
Model: NET-35C						
T1 pin 7 to pin 8	s-c	240	3 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 77°C, ambient= 25°C

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
T1 pin 8 to pin 9	s-c	240	4 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 79°C, ambient= 26°C
T1 pin 6 to pin 8	s-c	240	3 hr	FS1	0.19	Unit cycle protection, no hazard. T1= 78°C, ambient= 24°C
Vent	blocked	240	4 hr	FS1	0.40	Temperature were stable, no hazard. T1= 88.6°C, ambient= 26.5°C
T1 (pin 9) After D100 V1 (+5V)	o-l	240	6 hr	FS1	0.49	Temp. stable at 6.5A, increased to 7A, unit shutdown, no hazard. T1= 111°C, ambient= 26°C
T1 (pin 7) After D200 V2 (+15V)	o-l	240	6 hr	FS1	0.50	Temp. stable at 2.1A, increased to 2.3A, unit shutdown, no hazard. T1= 99°C, ambient= 25.7°C
T1 (pin 6) After D300 V3 (-15V)	o-l	240	6 hr	FS1	0.37	Temp. stable at 1.6A, increased to 1.8A, unit shutdown, no hazard. T1= 118°C, ambient= 25°C
V1-RTN	s-c	240	4 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 69.7°C, ambient= 24.6°C
V2-RTN	s-c	240	4 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 75°C, ambient= 25.6°C
V3-RTN	s-c	240	5 hr	FS1	0.11	Unit cycle protection, no hazard. T1= 59°C, ambient= 25.5°C
V1-V2	s-c	240	5 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 74°C, ambient= 23.9°C
V2-V3	s-c	240	5 hr	FS1	0.16	Unit cycle protection, no hazard. T1= 71°C, ambient= 25.4°C
V1-V3	s-c	240	4 hr	FS1	0.12	Unit cycle protection, no hazard. T1= 62.5°C, ambient= 22.9°C
+5V	o-l	240	6 hr	FS1	0.46	Temp. stable at 6A, increased to 7A, unit shutdown, no hazard. T1= 108°C, ambient= 27.5°C
+15V	o-l	240	2.5 hr	FS1	0.49	Temp. stable at 1.9A, increased to 2.3A, unit shutdown, no hazard. T1= 96°C, ambient= 26.6°C

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
-15V	o-l	240	4.5 hr	FS1	0.48	Temp. stable at 1.4A, increased to 1.7A, unit shutdown, no hazard. T1= 116°C, ambient= 31.2°C
Model: NET-35D						
U1 pin 2 – 8	s-c	240	1 s	FS1	--	Fuse opened, no hazard.
U1 pin 6 to pin 4	s-c	240	10 min	FS1	0.18	Unit shutdown, no hazard.
U1 pin 6	o-c	240	10 min	FS1	0.18	Unit shutdown, no hazard.
R8	s-c	240	1 s	FS1	--	Fuse open, no hazard.
T1 pin 7 to pin 10	s-c	240	5 hr	FS1	0.20	Unit cycle protection, no hazard. T1= 72°C, ambient= 25°C
T1 pin 8 to pin 9	s-c	240	4 hr	FS1	0.20	Unit cycle protection, no hazard. T1= 73°C, ambient= 26°C
T1 pin 6 to pin 8	s-c	240	4 hr	FS1	0.20	Unit cycle protection, no hazard. T1= 74°C, ambient= 25°C
Vent	blocked	240	3 hr	FS1	0.39	Temperature were stable, no hazard. T1= 99.8°C, ambient=2 8.2°C
T1 (pin 9) After D100 V1 (+5V)	o-l	240	6 hr	FS1	0.48	Temp. stable at 5.7A increased to 6A, unit shutdown, no hazard. T1= 95°C, ambient= 26°C
T1 (pin 7) After D200 V2 (+24V)	o-l	240	6 hr	FS1	0.51	Temp. stable at 1.3A increased to 1.5A, unit shutdown, no hazard. T1= 103°C, ambient= 27°C
T1 (pin 6) After D300 V3 (-12V)	o-l	240	6 hr	FS1	0.25	Temp. stable at 2.3A increased to 2.7A, unit shutdown. no hazard. T1= 118°C, ambient= 31°C
V1-RTN	s-c	240	4 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 87.4°C, ambient= 24.6°C
V2-RTN	s-c	240	3 hr	FS1	0.18	Unit cycle protection, no hazard. T1= 87.5°C, ambient= 22.9°C
V3-RTN	s-c	240	5 hr	FS1	0.16	Unit cycle protection, no hazard. T1= 75°C, ambient= 25.5°C

IEC/EN 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
V1-V2	s-c	240	4 hr	FS1	0.16	Unit cycle protection, no hazard. T1= 86°C, ambient= 25.6°C
V2-V3	s-c	240	4 hr	FS1	0.14	Unit cycle protection, no hazard. T1= 68°C, ambient= 24.9°C
V1-V3	s-c	240	4 hr	FS1	0.15	Unit cycle protection, no hazard. T1= 71°C, ambient= 24.9°C
+5V	o-l	240	4 hr	FS1	0.46	Temp. stable at 5A, increased to 6A, unit shutdown, no hazard. T1= 92°C, ambient= 27.5°C
+24V	o-l	240	3 hr	FS1	0.48	Temp. stable at 1.1A, increased to 1.4A, unit shutdown, no hazard. T1= 96°C, ambient= 26.6°C
+12V	o-l	240	3.5 hr	FS1	0.50	Temp. stable at 2.0A, increased to 2.5A, unit shutdown, no hazard. T1= 114°C, ambient= 31.2°C
Model: SCP-35-12 with top chassis (U2 empty during the test)						
T1 pin(6/7 to 8/9/10)	s-c	240	30 min.	FS1	0.05 to 0.28	Unit cycle protection, no hazard.
Vent.	blocked	240	3hr, 40min.	FS1	0.4	Unit normal operation, temperature was stable, no hazard. T1= 84°C, U3 body= 66.8°C, ambient= 27.8°C.
+13.8Vdc output	s-c	240	30 min.	FS1	0.05 to 0.11	Unit cycle protection, no hazard.
+13.8Vdc output	o-l	240	7.5hr	FS1	0.44	Temperature constant at loaded 4.6A, increased to 5A then unit shutdown. Max. temperature of T1= 92°C, U3 body=71°C, ambient =24.9°C, no hazards.
T1 pin(10/11/12 after D100 to RTN)	o-l	240	14.2hr	FS1	0.44	Temperature constant at loaded 1.9A+output loaded 2.6A, increased to 2.3A+ output loaded 2.6A then unit shutdown. Max. temperature of T1= 92°C, U3=72°C, ambient =24.0°C, no hazards.
Model: SCP-35-24 with top chassis (U2 empty during the test)						

IEC/EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

+27.6Vdc output	o-l	240	6.2hr	FS1	0.5	Temperature constant at loaded 2.5A, increased to 2.9A then unit shutdown. Max. temperature of T1= 80°C, U3 body=58°C, ambient =24.8°C, no hazards.
T1 pin(10/11/12 after D100 to RTN)	o-l	240	8.5hr	FS1	0.48	Temperature constant at loaded 1.4A+output loaded 1.4A, increased to 1.5A+ output loaded 1.4A then unit shutdown. Max. temperature of T1= 86°C, U3=64°C, ambient =24.0°C, no hazards.

Supplementary information:

1. For UL approved fuses, all tests have been repeated three times on fuse opened condition with same result.
2. In fault column, s-c=short-circuited, o-c=open-circuited, o-l=overload.
3. The components were damaged when tested had been repeated two times with same test outcome.



List of test equipment used:

Clause	Measurement / testing	Testing / measuring equipment / material used	Range used	Calibration date
Supplementary information: No listing of test equipment used necessary for chosen test procedure.				

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

2.1.1.5	TABLE: max. V, A, VA test				P
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
Model: NES-35-5					
+5V	7	5.1	12.6	45.5	
Model: NES-35-48					
+48	0.8	48	1.9	60.3	
Model: NED-35B					
+5V	2.2	5.1	9.6	37.4	
+24V	1	31.4	2.1	40.1	
Model: NET-35C					
+5V	2.5	5.0	10.5	41.3	
+15V	1	18.5	3.5	43.4	
-15V	0.5	21.0	3.4	50.0	
Model: NET-35D					
+5V	2.5	5.0	10.0	39.2	
+24V	0.5	29.1	2.1	43.5	
+12V	1	13.8	4.2	36.5	
Model: SCP-35-12					
+13.8V	2.6	13.8	5.0	46.5	
Model: SCP-35-24					
+27.6V	1.4	27.6	2.46	53.2	
Supplementary information: Test voltage 240V, 60Hz					

2.1.1.7	TABLE: discharge test				P
Condition	τ calculated (s)	τ measured (ms)	t u→0V (s)	Comments	
For PCB # NEx-35A (x= S, D, T) 2)					
L-N, Fuse IN	0.82	742	--	Uo: 372, 37% of Uo:138	
For PCB # NEx-35 (x= S, D, T) 2)					
L-N, Fuse IN	1.2	984	--	Uo: 372, 37% of Uo: 136	
L-N, Fuse IN	1.2	992	--	Uo: 368, 37% of Uo: 136	
L-N, Fuse Out	1.2	543	--	Uo: 370, 37% of Uo: 137	

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Supplementary information:
 Input voltage: 264VAC, 60Hz
 Overall capacity: 1.2µF (C1= C2= 0.6µF)
 Discharge resistor: 1MΩ (R1= 1MΩ, before fuse) or 0.68MΩ (R6= 0.68kΩ, after fuse)

2.2.2	TABLE: SELV measurement (under normal conditions)				P
Transformer	Location	Voltage (max.) (V)		Voltage Limitation Component	
		V peak	V d.c.		
Model: NES-35-5					
T1	Pin 9,10 to pin 6, 7, 8 (Earth)	21.8	--	--	
Model: NES-35-48					
T1	Pin 9,10 to pin 6, 7, 8 (Earth)	60.1	--	--	
--	After D100 to (Earth)	--	48.8	D100	
Model: NED-35B					
T1	Pin 6 to pin 7, 8 (Earth)	37.4	--	--	
T1	Pin 9 to pin 7, 8 (Earth)	10.1	--	--	
T1	Pin 10 to pin 7, 8 (Earth)	--	6.3	--	
Model: NET-35C					
T1	Pin 6 to pin 8 (Earth)	25.1	--	--	
T1	Pin 7 to pin 8 (Earth)	21.2	--	--	
T1	Pin 9 to pin 8 (Earth)	10.1	--	--	
T1	Pin 10 to pin 8 (Earth)	--	6.1	--	
Model: NET-35D					
T1	Pin 6 to pin 8 (Earth)	23.8	--	--	
T1	Pin 7 to pin 8 (Earth)	37.1	--	--	
T1	Pin 9 to pin 8 (Earth)	10.1	--	--	
T1	Pin 10 to pin 8 (Earth)	--	6.1	--	
Model: SCP-35-12					
T1	Pin 6/7 to Earth	64	--	--	
--	After D100 to Earth	--	18	D100	
Model: SCP-35-24					
T1	Pin 6/7 to Earth	108	--	--	
--	After D100 to Earth	--	30	D100	

ATTACHMENT Measurement Section



Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Supplementary information: Test voltage 240V, 60Hz			
--	--	--	--

2.2.3	TABLE: SELV measurement (under fault conditions)			P
Location	Voltage (max.) (V)	Comments		
Model: NES-35-12				
+12V output to Return	0	D100 shorted.		
Model: NES-35-48				
+48V output to Return	0	D100 shorted.		
Model: SCP-35-12				
+13.8V output to Return	0	D100 shorted. (Unit shutdown)		
Model: SCP-35-24				
+27.6V output to Return	0	D100 shorted. (Unit shutdown)		
Supplementary information: Test voltage 240V, 60Hz				

2.4.2	TABLE: Limited current circuit measurement					P
Location	Voltage (V)	Current (mA)	Freq. (Hz)	Limit (mA)	Comments	
C31 secondary pin to PE	0.54	0.27	60	0.7	C31=2200pF	
Supplementary information: Test voltage: 264V, 60Hz						

2.5	TABLE: limited power source measurement			N/A
	Limits	Measured	Verdict	
According to Table 2B/2C (normal condition)				
current (in A)				
apparent power (in VA)				

2.6.3.4	TABLE: Resistance of earthing measurement		P
Location	Resistance measured (mΩ)	Comments	
Model: NES-35-48			
Earth pin of terminal block to metal chassis (near C39)	10	32A, 2 minute, Drop voltage=0.32V	
Earth pin of terminal block to earth trace (near C30)	6	32A, 2 minute, Drop voltage=0.18V	

Clause	Requirement + Test	Result - Remark	Verdict
	Earth pin of terminal block to metal chassis (near C39)	10	40A, 2 minutes, Drop voltage=0.4V
	Earth pin of terminal block to earth trace (near C30)	6	40A, 2 minutes, Drop voltage=0.24V
Model: NED-35A			
	Earth pin of terminal block to metal chassis (near C39)	6	32A, 2 minute, Drop voltage=0.2V
	Earth pin of terminal block to earth trace (near C30)	4	32A, 2 minute, Drop voltage=0.11V
	Earth pin of terminal block to metal chassis (near C39)	7	40A, 2 minutes, Drop voltage=0.3V
	Earth pin of terminal block to earth trace (near C30)	4	40A, 2 minutes, Drop voltage=0.16V
Model: NET-35B			
	Earth pin of terminal block to metal chassis (near C39)	9	32A, 2 minute, Drop voltage=0.26V
	Earth pin of terminal block to earth trace (near C30)	4	32A, 2 minute, Drop voltage=0.13V
	Earth pin of terminal block to metal chassis (near C39)	8	40A, 2 minutes, Drop voltage=0.32V
	Earth pin of terminal block to earth trace (near C30)	4	40A, 2 minutes, Drop voltage=0.16V
Model: SCP-30-24			
	Earth pin of terminal block to metal chassis (near C39)	7	32A, 2 minute, Drop voltage=0.23V
	Earth pin of terminal block to earth trace (near C30)	4	32A, 2 minute, Drop voltage=0.12V
	Earth pin of terminal block to metal chassis (near C39)	7	40A, 2 minutes, Drop voltage=0.28V
	Earth pin of terminal block to earth trace (near C30)	4	40A, 2 minutes, Drop voltage=0.15V
Supplementary information: Test voltage=12Vdc			

2.10.2	Table: working voltage measurement			P
Location	RMS voltage (V)	Peak voltage (V)	Comments	
Model: NES-35-5				
T1 pin 1 to pin 6, 7, 8	204	324		
T1 pin 1 to pin 9,10	204	332		
T1 pin 2 to pin 6, 7, 8	204	340		

ATTACHMENT Measurement Section



Clause	Requirement + Test	Result - Remark	Verdict
T1 pin 2 to pin 9,10	204	340	
T1 pin 4 to pin 6, 7, 8	221	356	
T1 pin 4 to pin 9,10	222	372	
T1 pin 5 to pin 6, 7, 8	259	452	Highest Vrms & Vpeak for T1.
T1 pin 5 to pin 9,10	250	432	
Model: NES-35-48			
T1 pin 1 to pin 6, 7, 8	205	332	
T1 pin 1 to pin 9,10	220	372	
T1 pin 2 to pin 6, 7, 8	205	340	
T1 pin 2 to pin 9,10	229	388	
T1 pin 4 to pin 6, 7, 8	220	348	
T1 pin 4 to pin 9,10	236	556	Highest Vpeak for T1.
T1 pin 5 to pin 6, 7, 8	257	420	Highest Vrms for T1.
T1 pin 5 to pin 9,10	224	380	
C31 Primary to Secondary	213	342	
U2 pin 1 to pin 4	226	358	
U2 pin 1 to pin 3	229	356	
U2 pin 2 to pin 4	228	364	
U2 pin 2 to pin 3	230	364	
U3 pin 1 to pin 4	184	298	
U3 pin 1 to pin 3	209	334	
U3 pin 2 to pin 4	219	348	
U3 pin 2 to pin 3	220	348	
Model: NED-35B			
T1 pin 1 to pin 6	205	336	
T1 pin 1 to pin 7, 8	206	332	
T1 pin 1 to pin 9	206	332	
T1 pin 1 to pin 10	209	340	
T1 pin 2 to pin 6	217	364	
T1 pin 2 to pin 7, 8	205	332	
T1 pin 2 to pin 9	207	348	
T1 pin 2 to pin 10	210	348	
T1 pin 4 to pin 6	219	420	Highest Vpeak for T1.
T1 pin 4 to pin 7, 8	220	348	

ATTACHMENT Measurement Section



Clause	Requirement + Test	Result - Remark	Verdict
T1 pin 4 to pin 9	220	372	
T1 pin 4 to pin 10	216	348	
T1 pin 5 to pin 6	236	396	
T1 pin 5 to pin 7, 8	253	412	Highest Vrms for T1.
T1 pin 5 to pin 9	249	412	
T1 pin 5 to pin 10	250	412	
Model: NET-35C			
T1 pin 1 to pin 6	203	389	
T1 pin 1 to pin 7	206	352	
T1 pin 1 to pin 8	202	335	
T1 pin 1 to pin 9	204	332	
T1 pin 1 to pin 10	207	341	
T1 pin 2 to pin 6	202	349	
T1 pin 2 to pin 7	210	358	
T1 pin 2 to pin 8	203	343	
T1 pin 2 to pin 9	204	347	
T1 pin 2 to pin 10	205	342	
T1 pin 4 to pin 6	195	333	
T1 pin 4 to pin 7	198	357	
T1 pin 4 to pin 8	193	327	
T1 pin 4 to pin 9	197	343	
T1 pin 4 to pin 10	191	317	
T1 pin 5 to pin 6	248	403	Highest Vrms & Vpeak for T1.
T1 pin 5 to pin 7	219	376	
T1 pin 5 to pin 8	223	389	
T1 pin 5 to pin 9	217	382	
T1 pin 5 to pin 10	227	381	
Model: NET-35D			
T1 pin 1 to pin 6	205	318	
T1 pin 1 to pin 7	203	329	
T1 pin 1 to pin 8	205	303	
T1 pin 1 to pin 9	204	302	
T1 pin 1 to pin 10	200	310	
T1 pin 2 to pin 6	202	327	

ATTACHMENT Measurement Section



Clause	Requirement + Test	Result - Remark	Verdict
T1 pin 2 to pin 7	212	341	
T1 pin 2 to pin 8	182	308	
T1 pin 2 to pin 9	203	318	
T1 pin 2 to pin 10	201	318	
T1 pin 4 to pin 6	229	407	
T1 pin 4 to pin 7	218	412	
T1 pin 4 to pin 8	217	349	
T1 pin 4 to pin 9	217	365	
T1 pin 4 to pin 10	225	356	
T1 pin 5 to pin 6	253	420	
T1 pin 5 to pin 7	242	404	
T1 pin 5 to pin 8	263	468	Highest Vrms & Vpeak for T1.
T1 pin 5 to pin 9	257	428	
T1 pin 5 to pin 10	252	420	
Model: SCP-30-12			
T1 pin 1 to pin 6/7	209	352	
T1 pin 1 to pin 8/9/10	208	336	
T1 pin 2 to pin 6/7	213	368	
T1 pin 2 to pin 8/9/10	209	352	
T1 pin 4 to pin 6/7	221	408	
T1 pin 4 to pin 8/9/10	219	352	
T1 pin 5 to pin 6/7	243	408	
T1 pin 5 to pin 8/9/10	254	424	Highest Vrms & Vpeak for T1.
Model: SCP-30-24			
T1 pin 1 to pin 6/7	214	368	
T1 pin 1 to pin 8/9/10	209	336	
T1 pin 2 to pin 6/7	221	376	
T1 pin 2 to pin 8/9/10	210	360	
T1 pin 4 to pin 6/7	223	440	Highest Vpeak for T1.
T1 pin 4 to pin 8/9/10	218	352	
T1 pin 5 to pin 6/7	237	400	
T1 pin 5 to pin 8/9/10	260	424	Highest Vrms for T1.
Supplementary information: Input voltage: 240Vac, 60Hz			

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

4.6.1, 4.6.2	Table: Enclosure opening measurements		N/A
Location	Size (mm)	Comments	
Supplementary information: No openings.			

5.1.6	TABLE: touch current measurement			P
Condition	L → terminal A (mA)	N → terminal A (mA)	Limit (mA)	Comments
Fuse in	2.0	2.0	3.5	To metal chassis with switch “e” opened
Fuse out	3.0	0.5	3.5	To metal chassis with switch “e” opened
Fuse in	0.19	0.19	0.25	To output (+) with switch “e” closed
Fuse out	0.19	0.19	0.25	To output (-) with switch “e” closed
Supplementary information: Test voltage: 264V, 60Hz Overall capacity: C22= C23= C29= C30= C3= C4= 4700pF, C31= 2200pF				

C.2	TABLE: Insulation of transformers						P
	Transformer part name	T1 for model NES-35y (y = 5, 12, 15, 24, 48)					—
	Manufacturer	See appended table 1.5.1.					—
	Type	See appended table 1.5.1.					—
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Primary/input winding and secondary/output winding (internal)	556	257	4.4	6.0	5.4	6.0	
Primary/input winding and core (internal)			2.2	3.0	2.7	3.0	
Secondary/output winding and core (internal)			2.2	3.0	2.7	3.0	
Primary/input part and secondary/output part (external)			4.4	17.5	5.4	17.5	
Primary/input part and core (external)			2.2	7.0	2.7	7.0	

Clause	Requirement + Test	Result - Remark	Verdict
Primary/input part and secondary/output winding (external)		4.4 7.1 5.4	7.1
Secondary/output part and core (external)		2.2 7.0 2.7	7.0
Secondary/output part and primary/input winding (external)		4.4 7.1 5.4	7.1
Description of design:			
(a) Bobbin			
Primary/input pins	1). 3 – 4; 1 – 2; 5 – 3 (for type TF-1238 ~ 41) 2). 3 – 4; 1 – 2; 5 – 3 (for type TF-1242)		
Secondary/output pins	1). 10 – 8; 9 – 7 (for type TF-1238 ~ 41) 2). 9 – 7 (for type TF-1242)		
Material (manufacturer, type, ratings)	Phenolic, flammability class V-0, 150°C: 1. Mfr.: Sumitomo Bakelite, type: PM-9820 (for mfr.: Jet Signal and Long Sail) 2. Mfr.: Chang Chun, type: T373J or T375J (for mfr.: Yao Sheng) 3. Mfr.: Chang Chun, type: T373J (for mfr.: Ten Well)		
Thickness (mm).....	0.7mm min.		
(b) General			
Transformer construction as below: Concentric windings on Phenolic bobbin on EI-30 size core (vertical core orientation), core is considered as floating parts. Three layers of insulation tape between primary and secondary windings, The margin tape is 3.0 mm at bottom side and top side of transformer to provide for primary and secondary winding. Two layers of insulation tape wrapped around the outside of "E" and "I" core with flod back 5.5mm, additional three layers of insulation tape wrapped around the out side of the core completely. Winding ends additionally fixed with tape, tubing exit ends leaded above the margin tape.			
<u>Insulation tape:</u> 3M, type: No.1350-1; Bondtec, type: No.370S; Symbio Inc, type: 35660* (for mfr.: Jet Signal) 3M, type: No.1350F-1(b); Bondtec, type: No.371F; Symbio Inc, type: 35660Y* (for mfr.: Long Sail) 3M, type: No.1350F-1; Nitto denko, type:31CT (for mfr.: Yao Sheng) 3M, type: No.1350F-1 (for mfr.: Ten Well)			
<u>Margin tape:</u> 3M, type: No.44; Bondtec, type: No.201-45 (for mfr.: Jet Signal) 3M, type: No.44, 44-T-A(a); Bondtec, type: No.201; Symbio Inc, type: 35661 (for mfr.: Long Sail) 3M, type: No.44; Permacel, type:P-245 (for mfr.: Yao Sheng) 3M, type: No.44 (for mfr.: Ten Well)			
Supplementary information:			

ATTACHMENT Measurement Section



Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

All types are similar in construction except for the manufacturer, type designation, turn ratio and gauge of secondary winding, turn ratio and gauge of feed back of primary winding.

C.2	TABLE: Insulation of transformers						P
	Transformer part name	T1 for model NED-35y (y = A, B)					—
	Manufacturer	See appended table 1.5.1.					—
	Type	See appended table 1.5.1.					—
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Primary/input winding and secondary/output winding (internal)	420	253	4.0	6.0	5.2	6.0	
Primary/input winding and core (internal)			2.0	3.0	2.6	3.0	
Secondary/output winding and core (internal)			2.0	3.0	2.6	3.0	
Primary/input part and secondary/output part (external)			4.0	17.5	5.2	17.5	
Primary/input part and core (external)			2.0	7.0	2.6	7.0	
Primary/input part and secondary/output winding (external)			4.0	7.1	5.2	7.1	
Secondary/output part and core (external)			2.0	7.0	2.6	7.0	
Secondary/output part and primary/input winding (external)			4.0	7.1	5.2	7.1	
Description of design:							
(a) Bobbin							
Primary/input pins	3 – 4; 1 – 2; 5 – 3						
Secondary/output pins	9 – 8, 7; 6 – 10						
Material (manufacturer, type, ratings)	Phenolic, flammability class V-0, 150°C 1. Mfr.: Sumitomo Bakelite, type: PM-9820 (for mfr.: Jet Signal and Long Sail) 2. Mfr.: Chang Chun, type: T373J or T375J (for mfr.: Yao Sheng) 3. Mfr.: Chang Chun, type: T373J (for mfr.: Ten Well)						

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Thickness (mm)..... :	0.7mm min.
(b) General	
Transformer construction as below: Concentric windings on Phenolic bobbin on EI-30 size core (vertical core orientation), core is considered as floating parts. Three layers of insulation tape between primary and secondary windings, The margin tape is 3.0 mm at bottom side and top side of transformer to provide for primary and secondary winding. Two layers of insulation tape wrapped around the outside of "E" and "I" core with flod back 5.5mm, additional three layers of insulation tape wrapped around the out side of the core completely. Winding ends additionally fixed with tape, tubing exit ends leaded above the margin tape.	
<u>Insulation tape:</u> 3M, type: No.1350-1; Bondtec, type: No.370S; Symbio Inc, type: 35660* (for mfr.: Jet Signal) 3M, type: No.1350F-1(b); Bondtec, type: No.371F; Symbio Inc, type: 35660Y* (for mfr.: Long Sail) 3M, type: No.1350F-1; Nitto denko, type:31CT (for mfr.: Yao Sheng) 3M, type: No.1350F-1 (for mfr.: Ten Well)	
<u>Margin tape:</u> 3M, type: No.44; Bondtec, type: No.201-45 (for mfr.: Jet Signal) 3M, type: No.44, 44-T-A(a); Bondtec, type: No.201; Symbio Inc, type: 35661 (for mfr.: Long Sail) 3M, type: No.44; Permacel, type:P-245 (for mfr.: Yao Sheng) 3M, type: No.44 (for mfr.: Ten Well)	
Supplementary information: All types are similar in construction except for the manufacturer, type designation, turn ratio and gauge of secondary winding, turn ratio and gauge of feed back of primary winding.	

C.2	TABLE: Insulation of transformers						P
	Transformer part name	T1 for model NET-35-x (x = 5, 12, 15, 24)					—
	Manufacturer	See appended table 1.5.1.					—
	Type	See appended table 1.5.1.					—
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Primary/input winding and secondary/output winding (internal)	468	263	4.2	6.0	5.4	6.0	
Primary/input winding and core (internal)			2.1	3.0	2.7	3.0	
Secondary/output winding and core (internal)			2.1	3.0	2.7	3.0	
Primary/input part and secondary/output part (external)			4.2	17.5	5.4	17.5	
Primary/input part and core (external)			2.1	7.0	2.7	7.0	

Clause	Requirement + Test	Result - Remark	Verdict
Primary/input part and secondary/output winding (external)		4.2 7.1 5.4	7.1
Secondary/output part and core (external)		2.1 7.0 2.7	7.0
Secondary/output part and primary/input winding (external)		4.2 7.1 5.4	7.1
Description of design:			
(a) Bobbin			
Primary/input pins		3 – 4; 1 – 2; 5 – 3	
Secondary/output pins		9 – 8, 7 – 10; 8 – 6	
Material (manufacturer, type, ratings)		Phenolic, flammability class V-0, 150°C 1. Mfr.: Sumitomo Bakelite, type: PM-9820 (for mfr.: Jet Signal and Long Sail) 2. Mfr.: Chang Chun, type: T373J or T375J (for mfr.: Yao Sheng) 3. Mfr.: Chang Chun, type: T373J (for mfr.: Ten Well)	
Thickness (mm).....		0.7mm min.	
(b) General			
Transformer construction as below: Concentric windings on Phenolic bobbin on EI-30 size core (vertical core orientation), core is considered as floating parts. Three layers of insulation tape between primary and secondary windings, The margin tape is 3.0 mm at bottom side and top side of transformer to provide for primary and secondary winding. Two layers of insulation tape wrapped around the outside of "E" and "I" core with flod back 5.5mm, additional three layers of insulation tape wrapped around the out side of the core completely. Winding ends additionally fixed with tape, tubing exit ends leaded above the margin tape.			
<u>Insulation tape:</u> 3M, type: No.1350-1; Bondtec, type: No.370S; Symbio Inc, type: 35660* (for mfr.: Jet Signal) 3M, type: No.1350F-1(b); Bondtec, type: No.371F; Symbio Inc, type: 35660Y* (for mfr.: Long Sail) 3M, type: No.1350F-1; Nitto denko, type:31CT (for mfr.: Yao Sheng) 3M, type: No.1350F-1 (for mfr.: Ten Well)			
<u>Margin tape:</u> 3M, type: No.44; Bondtec, type: No.201-45 (for mfr.: Jet Signal) 3M, type: No.44, 44-T-A(a); Bondtec, type: No.201; Symbio Inc, type: 35661 (for mfr.: Long Sail) 3M, type: No.44; Permacel, type:P-245 (for mfr.: Yao Sheng) 3M, type: No.44 (for mfr.: Ten Well)			
Supplementary information: All types are similar in construction except for the manufacturer, type designation, turn ratio and gauge of secondary winding, turn ratio and gauge of feed back of primary winding.			

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

C.2	TABLE: Insulation of transformers		P
	Transformer part name	T1 for model SCP-35-z (z = 12, 24)	—
	Manufacturer	See appended table 1.5.1.	—
	Type	See appended table 1.5.1.	—

Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
Primary/input winding and secondary/output winding (internal)	440	260	4.2	6.0	5.4	6.0
Primary/input winding and core (internal)			2.1	3.0	2.7	3.0
Secondary/output winding and core (internal)			2.1	3.0	2.7	3.0
Primary/input part and secondary/output part (external)			4.2	17.5	5.4	17.5
Primary/input part and core (external)			2.1	3.6	2.7	3.6
Primary/input part and secondary/output winding (external)			4.2	6.8	5.4	6.8
Secondary/output part and core (external)			2.1	3.6	2.7	3.6
Secondary/output part and primary/input winding (external)			4.2	6.8	5.4	6.8

Description of design:

(a) Bobbin	
Primary/input pins	5-3-4, 1-2
Secondary/output pins	6/7-9/10/8
Material (manufacturer, type, ratings)	Phenolic, flammability class V-0, 150°C Mfr.: Sumitomo Bakelite, type: PM-9820 or PM-9630 (for mfr.: Ten Well, Long Sail, Elytone and Jet Signal)
Thickness (mm).....	0.7mm min.

(b) General

Transformer construction as below:
Concentric windings on Phenolic bobbin on EI-30 size core (Vertical core orientation), core is considered as floating parts. Three layers of insulation tape between primary and secondary windings, The margin

ATTACHMENT Measurement Section



Page 94 of 106

Report No.: 11020301 001

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

tape is 3.0mm at top/bottom side of transformer. Two layers of insulation tape wrapped top core, All winding ends additionally fixed with tubing provided on all winding exit ends above the margin tape.

Supplementary information:

All types are identical in construction except for the manufacturer, type designation, turn ratio and gauge of primary/secondary winding.

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict

EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES
Differences according to.....: EN 60950-1:2006+A11:2009

CENELEC COMMON MODIFICATIONS (EN)		
ZA	Normative references to international publications with their corresponding European publications	—

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		P
1.2.13.14	In Norway and Sweden , for requirements see 1.7.2.1 and 7.3 of this annex.	Not Cable Distribution system.	N/A
1.5.7.1	Replace the existing SNC by the following: In Finland, Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.	The resistor bridging functional insulation.	N/A
1.7.2.1	Add as new SNC: In Norway and Sweden , the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: “Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11).” NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): “Utstyr som er koplet til beskyttelsesjord via	Not Cable Distribution system.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
	<p>nettplugg og/eller via annet jordtilkoplest utstyr – og er tilkoplest et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel- TV nettet.”</p> <p>Translation to Swedish: ”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”</p>		
1.7.5	<p>Add the following paragraph to the existing SNC for Denmark: For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.</p>	Class I equipment.	N/A
7.3	<p>Delete the existing SNC for Norway and Sweden (based on NOTE 1 of IEC 60950-1:2005 + corr. 1). Add as new SNC (based on future NOTE 3 of IEC 60950-1:200X): In Norway and Sweden, for requirements see 1.2.13.14 and 1.7.2.1 of this annex.</p>	Not Cable Distribution system.	N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		P
1.5.1	<p>Sweden Delete the A-deviation.</p>	Deleted.	P
1.7.2.1	<p>Denmark Delete the A-deviation.</p>	Deleted.	P
1.7.5	<p>Denmark Delete the A-deviation.</p>	Deleted.	P
5.1.7.1	<p>Denmark Delete the A-deviation.</p>	Deleted.	P

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
	Canadian National Differences		P
SPECIAL NATIONAL CONDITIONS			
1.1.1	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, unless marked or otherwise identified, installation is allowed per the Standard for the Protection of Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	Unit was evaluated according to IEC 60950-1. The requirements have to be checked during national approval.	N/A
1.4.14	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.	Considered.	P
1.5.5	For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the CEC/NEC. For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the CEC are required to have special construction features and identification markings.		N/A
1.7.1	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. A voltage rating that exceeds an attachment plug cap rating is only permitted if it does not exceed the extreme operating conditions in Table 2 of CAN/CSA C22.2 No. 235, and if it is part of a range that extends into the Table 2 "Normal Operating Conditions." Likewise, a voltage rating shall not be lower than the specified "Normal Operating Conditions," unless it is part of a range that extends into the "Normal Operating Conditions."	Single phase.	N/A
1.7.7	Wiring terminals intended to supply Class 2 outputs in accordance with CEC Part 1 or NEC shall be marked with the voltage rating and "Class 2" or equivalent. Marking shall be located adjacent to the terminals and shall be visible during wiring.	Not applied for.	N/A
2.5	Where a fuse is used to provide Class 2, Limited Power Source, or TNV current limiting, it shall not be operator-accessible unless it is not interchangeable.	No such fuse.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
2.7.1	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable. Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.	No such components provided.	N/A
3.2	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains shall be in accordance with the NEC/CEC.	Overall acceptance has to be evaluated during the national approval process.	N/A
3.2.1	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.	No power supply cords provided.	N/A
3.2.1.2	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, is required to comply with special earthing, wiring, marking and installation instruction requirements.		N/A
3.2.3	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.	Not permanent connection equipment.	N/A
3.2.5	Power supply cords are required to be no longer than 4.5 m in length. Flexible power supply cords are required to be compatible with Tables 11 and 12 of the CEC and Article 400 of the NEC.	No power supply cord provided.	N/A
3.2.9	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.	Not permanent connection equipment.	N/A
3.3	Wiring terminals and associated spacings for field wiring connections shall comply with CSA C22.2 No. 0.	No wiring terminals.	N/A
3.3.3	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).	No binding screws.	N/A
3.3.4	Terminals for permanent wiring, including protective earthing terminals, are required to be suitable for Canadian/US wire gauge sizes, rated 125 percent of the equipment rating, and be specially marked when specified (1.7.7).	No such wiring.	N/A
3.4.2	Motor control devices are required for cord-connected equipment with a motor if the equipment is rated more than 12 A, or if the motor has a nominal voltage rating greater than 120 V, or is rated more than 1/3 hp (locked rotor current over 43 A).	Equipment is not such a device.	N/A
3.4.8	Vertically-mounted disconnect switches and circuit breakers are required to have the "on" position indicated by the handle in the up position.	No such device incorporated.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
3.4.11	For computer room applications, equipment with battery systems capable of supplying 750 VA for five minutes are required to have a battery disconnect means that may be connected to the computer room remote power-off circuit.	Not such application.	N/A
4.3.12	The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.	No liquids provided.	N/A
4.3.13.5	Equipment with lasers is required to meet the Canadian Radiation Emitting Devices Act, REDR C1370 and/or Code of Federal Regulations 21 CFR 1040, as applicable.	No laser provided.	N/A
4.7	For computer room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) are required to have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.	Not automated information storage systems.	N/A
4.7.3.1	For computer room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) are required to have a flame spread rating of 50 or less. For other applications, enclosures with the same dimensions require a flame spread rating of 200 or less.	No such enclosure.	N/A
Annex H	Equipment that produces ionizing radiation is required to comply with the Canadian Radiation Emitting Devices Act, REDR C1370 and/or Code of Federal Regulations, 21 CFR 1020, as applicable.	No ionizing radiation.	N/A
OTHER DIFFERENCES			
1.5.1	Some components and materials associated with the risk of fire, electric shock, or personal injury are required to have component or material ratings in accordance with the applicable national (Canadian and/or U.S.) component or material standard requirements. These components include: attachment plugs, battery packs (rechargeable type, used with transportable equipment), cathode ray tubes, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), cord sets and power supply cords, direct plug-in equipment, enclosures (outdoor), flexible cords and cables, fuses (branch circuit), fuseholders, ground-fault current interrupters, industrial control equipment, insulating tape, interconnecting cables, lampholders, limit controls, printed wiring, protectors for communications circuits, receptacles, solid state controls, supplementary protectors, switches (including interlock switches), thermal cutoffs, thermostats, (multi-layer) transformer winding wire, transient voltage surge suppressors, tubing, wire connectors, and wire and cables.	Approved components used, see component list 1.5.1 in Measurement section report.	P

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
1.6.1.2	A circuit for connection to the DC Mains Supply is classified as either a SELV Circuit, TNV-2 Circuit or Hazardous Voltage Circuit depending on the maximum operating voltage of the supply. This maximum operating voltage shall include consideration of the battery charging “float voltage” associated with the intended supply system, regardless of the marked power rating of the equipment.		N/A
2.3.1	For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V _{d.c.} , the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.	No TNV circuits.	N/A
2.3.2.1	In the event of a single fault between TNV and SELV circuits, the limits of 2.2.3 apply to SELV Circuits and accessible conductive parts.	No TNV circuits.	N/A
2.6.3.4	Protective bonding conductors of non-standard protective bonding constructions (e.g., printed circuit traces) may be subjected to the additional limited short circuit test conditions specified.	See table 2.6.3.4 in Measurement section report. However, building-in type shall be evaluated for the final system assembly.	N/A
4.2.8.1	Enclosures around CRTs with a face diameter of 160 mm or more are required to reduce the risk of injury due to the implosion of the CRT.	No CRT.	N/A
4.2.11	For equipment intended for mounting on racks and provided with slide/rails allowing the equipment to slide away from the rack for installation, service and maintenance, additional construction, performance and marking requirements are applicable to determine the adequacy of the slide/rails.		N/A
4.3.2	Equipment with handles is required to comply with special loading tests.		N/A
5.1.8.3	Equipment intended to receive telecommunication ringing signals is required to comply with a special touch current measurement tests.	No TNV circuits.	N/A
5.3.7	Internal (e.g., card cage) SELV circuit connectors and printed wiring board connectors that are accessible to the operator and that deliver power are to be overloaded. During abnormal operating testing, if a circuit is interrupted by the opening of a component, the test shall be repeated twice (three tests total) using new components as necessary.	Complied. See table 5.3 in Measurement section report.	P
6.4	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses in accordance with 6.4 and Annex NAC.	No TNV circuits.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
M.2	Continuous ringing signals up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.	No TNV circuits.	N/A
Annex NAD	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.	No TNV circuits.	N/A
Annex NAF	Document (paper) shredders likely to be used in a home or home office (Pluggable Equipment Type A plug configuration) are required to comply with additional requirements, including markings/instructions, protection against inadvertent reactivation of a safety interlock, disconnection from the mains supply (via provision of an isolating switch), and protection against operator access (accessibility determined via new accessibility probe & probe/wedge).	Not document (paper) shredders equipment.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
	Korean National Differences		P
	Corresponding National Standard: K 60950-1		P
1.5.101	Addition: Plugs for the connection of the apparatus to the supply mains shall comply with the Korean requirement (KSC 8305).	No power cord provided.	N/A
8	Addition: EMC The apparatus shall comply with the relevant CISPR standards.	The CISPR requirements have to be considered during national approval.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
	US National Differences		P
SPECIAL NATIONAL CONDITIONS BASED ON FEDERAL REGULATIONS			
1.1.1	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, and when applicable, the National Electrical Safety Code, IEEE C2. Also, unless marked or otherwise identified, installation is allowed per the Standard for the Protection of Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	Unit was evaluated according to IEC 60950-1. The requirements have to be checked during national approval.	N/A
1.4.14	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.	Considered.	P
1.5.5	For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type specified in the NEC. For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the NEC are required to have special construction features and identification markings.		N/A
1.7.1	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings.	Single phase.	N/A
2.5	Where a fuse is used to provide Class 2, Limited Power Source, or TNV current limiting, it shall not be operator-accessible unless it is not interchangeable.	No such fuse.	N/A
2.7.1	Suitable NEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable. Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.	No such components provided.	N/A
3.2	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains shall be in accordance with the NEC.	Overall acceptance has to be evaluated during the national approval process.	N/A
3.2.1	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.	No power supply cords provided.	N/A
3.2.1.2	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, is required to comply with special earthing, wiring, marking and installation instruction requirements.		N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
3.2.3	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.	Not permanent connection equipment.	N/A
3.2.5	Power supply cords are required to be no longer than 4.5 m in length and minimum length shall be 1.5 m. Flexible power supply cords are required to be compatible with Article 400 of the NEC.	No power supply cord provided.	N/A
3.2.9	Permanently connected equipment must have a suitable wiring compartment and wire bending space.	Not permanent connection equipment.	N/A
3.3.3	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).	No wiring terminals.	N/A
3.3.4	Terminals for permanent wiring, including protective earthing terminals, must be suitable for U.S wire gauge sizes, rated 125 percent of the equipment rating, and be specially marked when specified (1.7.7).	No binding screws.	N/A
3.4.2	Motor control devices are required for cord-connected equipment with a motor if the equipment is rated more than 12 A, or if the motor has a nominal voltage rating greater than 120 V, or is rated more than 1/3 hp (locked rotor current over 43 A).	Equipment is not such a device.	N/A
3.4.8	Vertically-mounted disconnect switches and circuit breakers are required to have the "on" position indicated by the handle in the up position.	No such device incorporated.	N/A
3.4.11	For computer room applications, equipment with battery systems capable of supplying 750 VA for five minutes are required to have a battery disconnect means that may be connected to the computer room remote power-off circuit.	Not such application.	N/A
4.3.12	The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.	No liquids provided.	N/A
4.3.13.5	Equipment with lasers is required to meet the Code of Federal Regulations 21 CFR 1040.	No laser provided.	N/A
4.7	For computer room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) are required to have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.	Not automated information storage systems.	N/A
4.7.3.1	For computer room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) are required to have a flame spread rating of 50 or less. For other applications, enclosures with the same dimensions require a flame spread rating of 200 or less.	No such enclosure.	N/A
Annex H	Equipment that produces ionizing radiation must comply with Federal Regulations, 21 CFR 1020	No ionizing radiation.	N/A


National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
OTHER NATIONAL DIFFERENCES			
1.5.1	Some components and materials associated with the risk of fire, electric shock, or personal injury are required to have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. These components include: attachment plugs, battery packs (rechargeable type, used with transportable equipment), cathode ray tubes, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), cord sets and power supply cords, direct plug-in equipment, enclosures (outdoor), flexible cords and cables, fuses (branch circuit), fuseholders, ground-fault current interrupters, industrial control equipment, insulating tape, interconnecting cables, lampholders, limit controls, printed wiring, protectors for communications circuits, receptacles, solid state controls, supplementary protectors, switches (including interlock switches), thermal cutoffs, thermostats, (multi-layer) transformer winding wire, transient voltage surge suppressors, tubing, wire connectors, and wire and cables.	Approved components used, see component list 1.5.1 in Measurement section report.	P
1.6.1.2	A circuit for connection to the DC Mains Supply is classified as either a SELV Circuit, TNV-2 Circuit or Hazardous Voltage Circuit depending on the maximum operating voltage of the supply. This maximum operating voltage it to include consideration of the battery charging “float voltage” associated with the intended supply system, regardless of the marked power rating of the equipment.	Not connection to the DC Mains Supply.	N/A
2.3.1	For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V _{d.c.} , the max. acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.	No TNV circuits.	N/A
2.3.2.1	In the event of a single fault between TNV and SELV circuits, the limits of 2.2.3 apply to SELV Circuits and accessible conductive parts.	No TNV circuits.	N/A
2.6.3.4	Protective bonding conductors of non-standard protective bonding constructions (e.g., printed circuit traces) may be subjected to the additional limited short circuit test conditions specified.	See table 2.6.3.4 in Measurement section report. However, building-in type shall be evaluated for the final system assembly.	N/A

National Differences			
Clause	Requirement – Test	Result – Remark	Verdict
4.2.8.1	Enclosures around CRTs with a face diameter of 160 mm or more are required to reduce the risk of injury due to the implosion of the CRT.	No CRT.	N/A
4.2.11	For equipment intended for mounting on racks and provided with slide/rails allowing the equipment to slide away from the rack for installation, service and maintenance, additional construction, performance and marking requirements are applicable to determine the adequacy of the slide/rails.		N/A
4.3.2	Equipment with handles is required to comply with special loading tests.		N/A
5.1.8.3	Equipment intended to receive telecommunication ringing signals is required to comply with a special touch current measurement tests.	No TNV circuits.	N/A
5.3.7	Internal (e.g., card cage) SELV circuit connectors and printed wiring board connectors that are accessible to the operator and that deliver power are to be overloaded. During abnormal operating testing, if a circuit is interrupted by the opening of a component, the test shall be repeated twice (three tests total) using new components as necessary.	Complied. See table 5.3 in Measurement section report.	P
6.4	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses in accordance with 6.4 and Annex NAC.	No TNV circuits.	N/A
M.2	Continuous ringing signals up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.	No TNV circuits.	N/A
Annex NAD	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.	No TNV circuits.	N/A
Annex NAF	Document (paper) shredders likely to be used in a home or home office (Pluggable Equipment Type A plug configuration) are required to comply with additional requirements, including markings/instructions, protection against inadvertent reactivation of a safety interlock, disconnection from the mains supply (via provision of an isolating switch), and protection against operator access (accessibility determined via new accessibility probe & probe/wedge).	Not document (paper) shredders equipment.	N/A

Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)


NES-35y

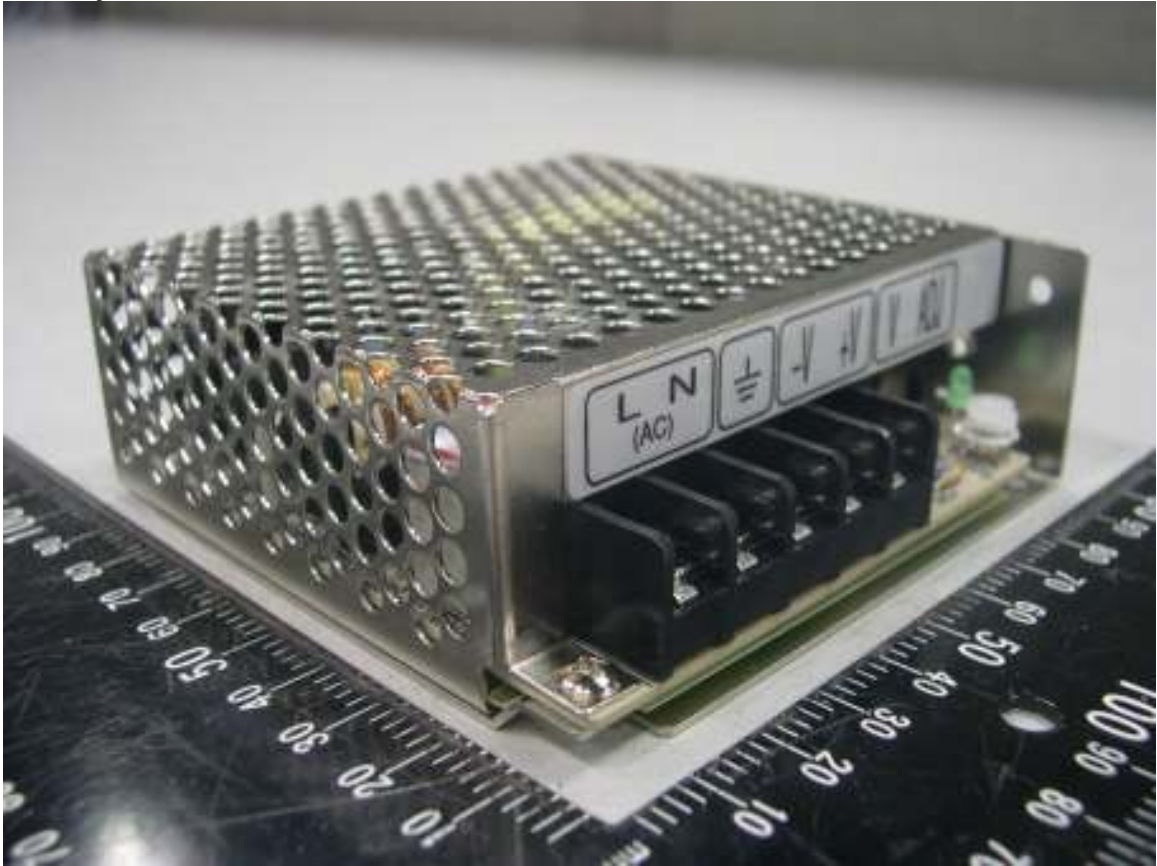

Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

NED-35y

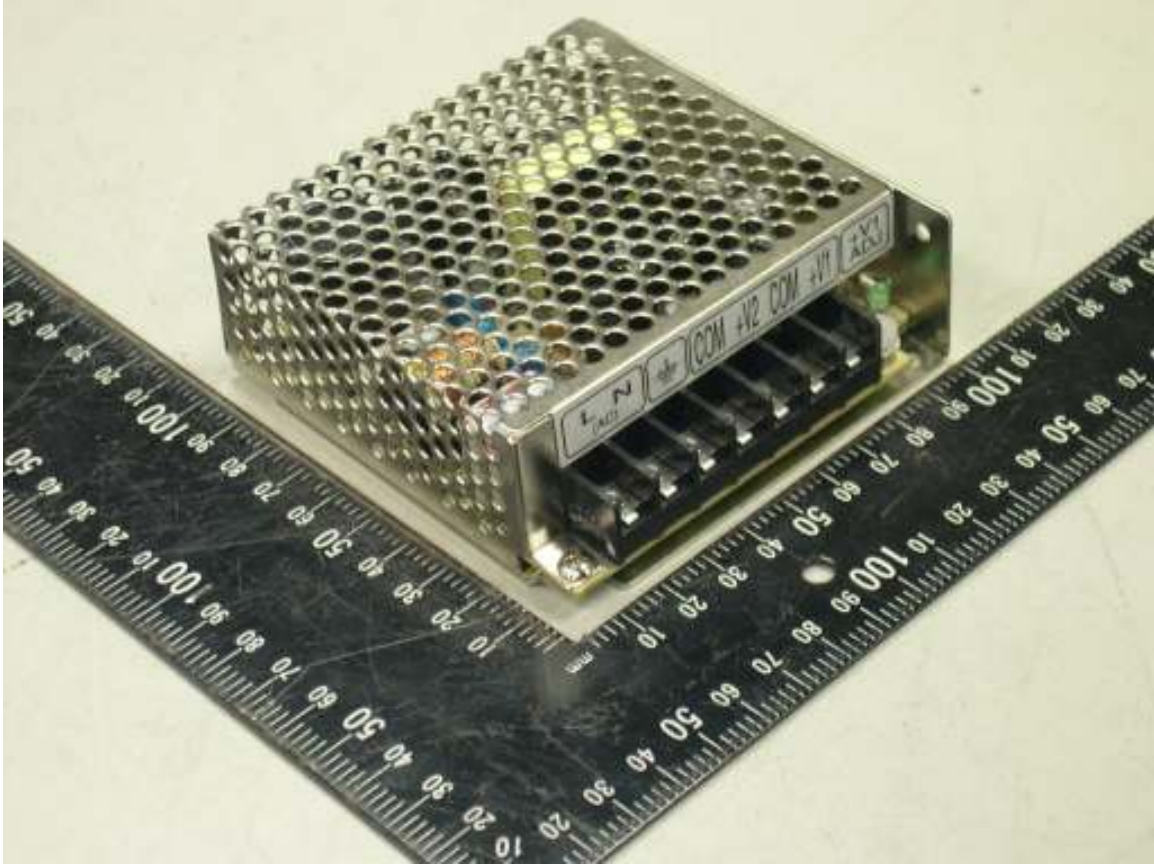

Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

NET-35y



Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

NEx-35y




NEx-35y




Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

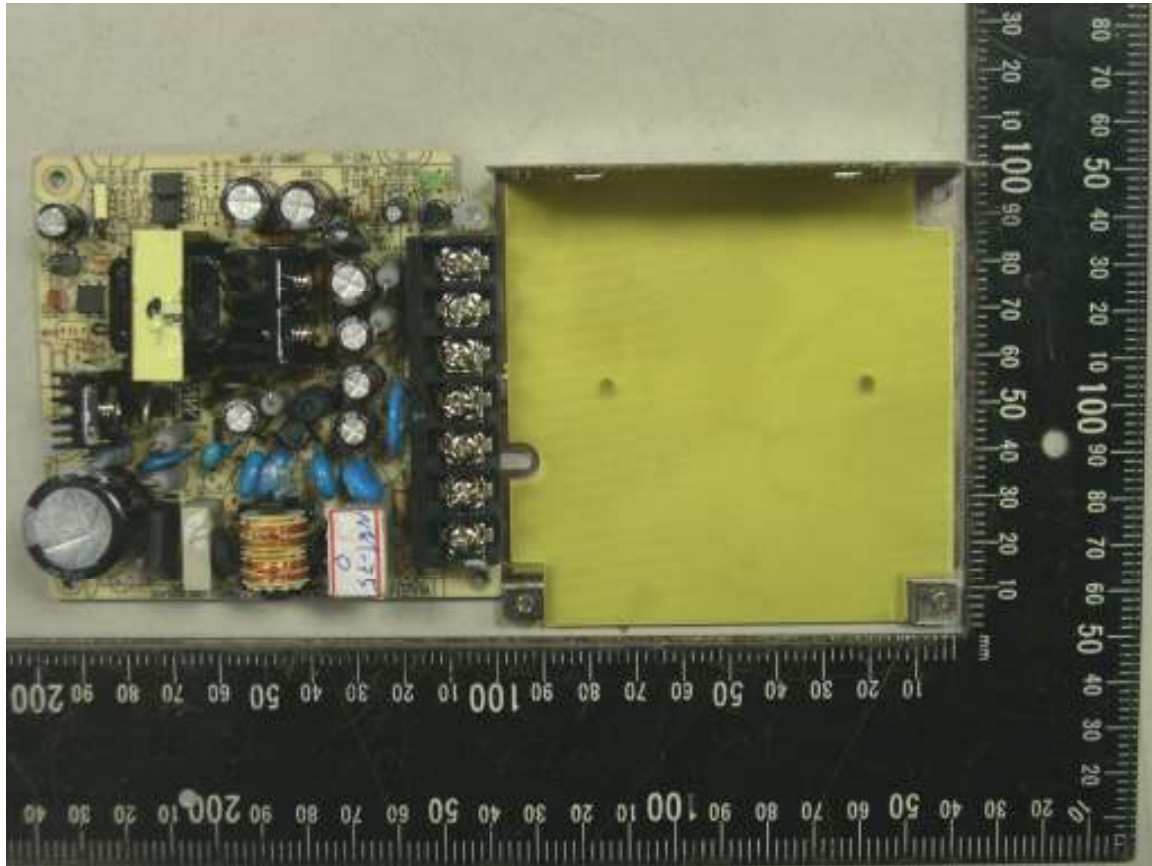


NES-35y (PCB: NES-35)

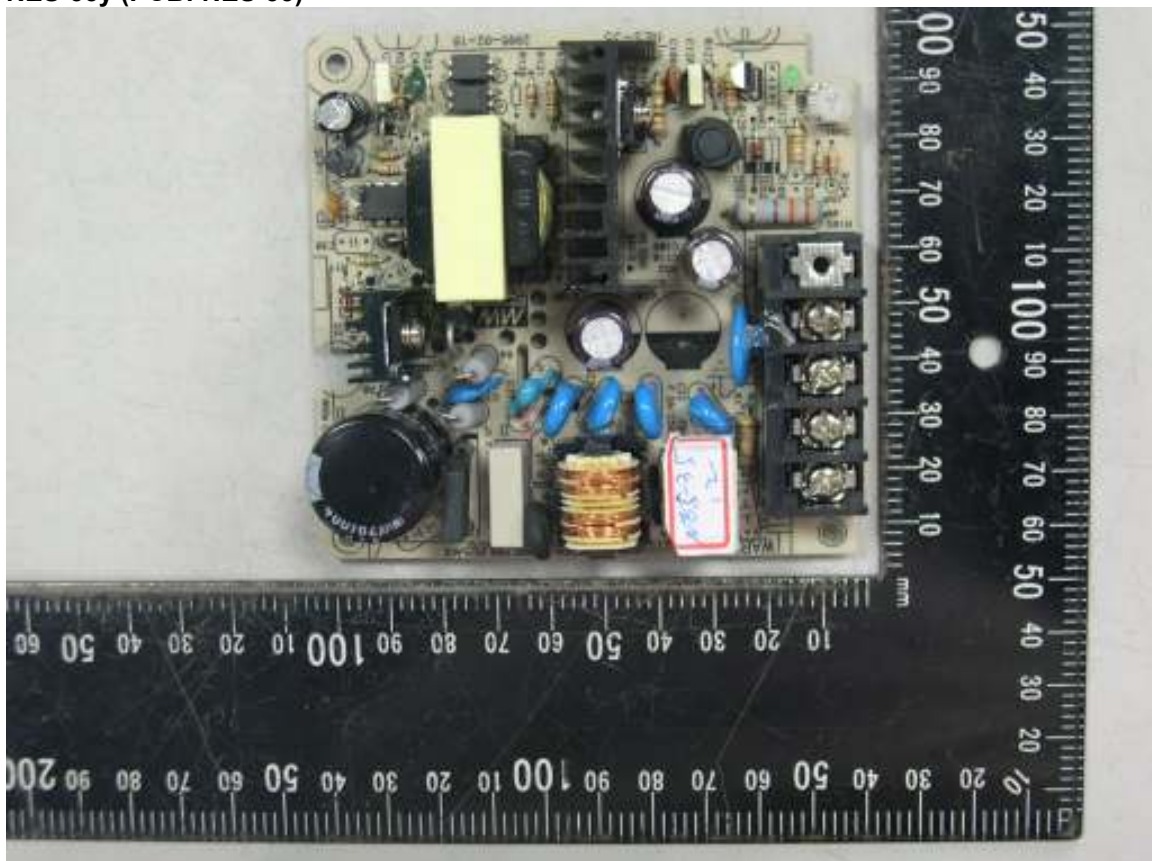


Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

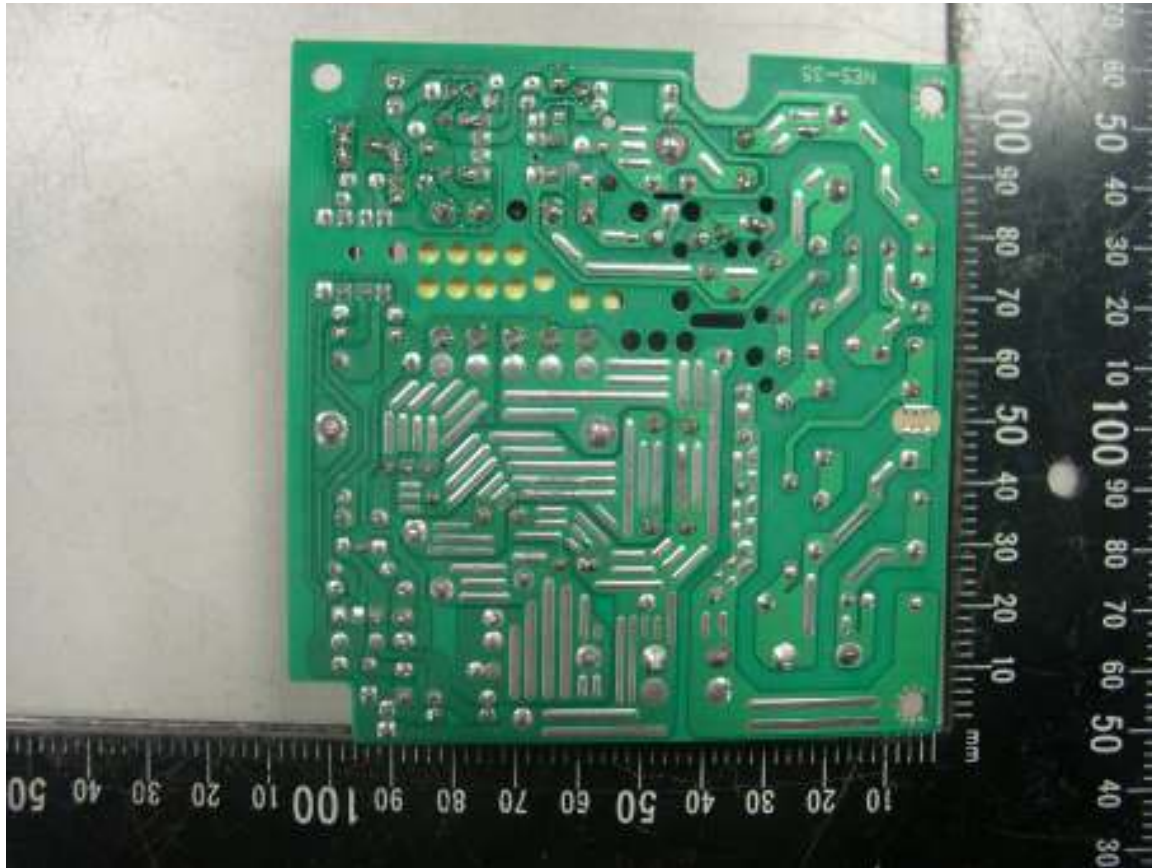


NES-35y (PCB: NES-35A)

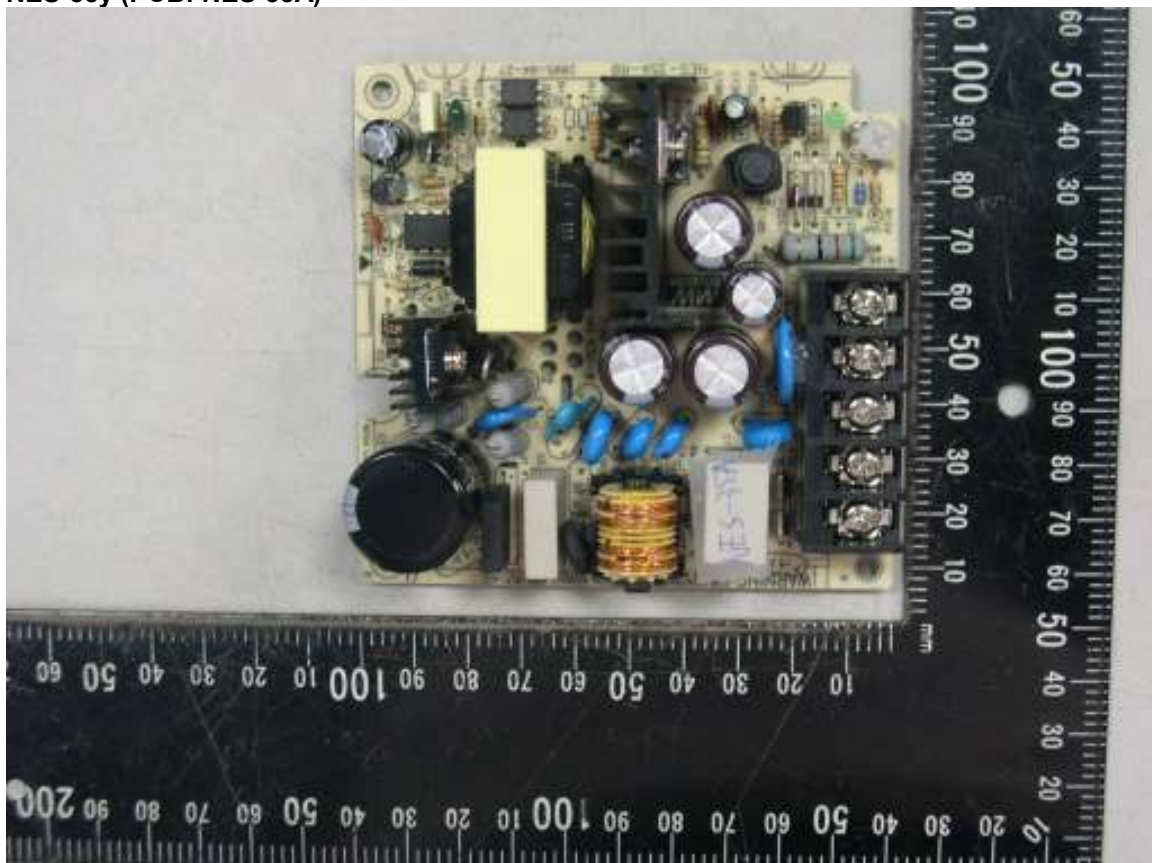


Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

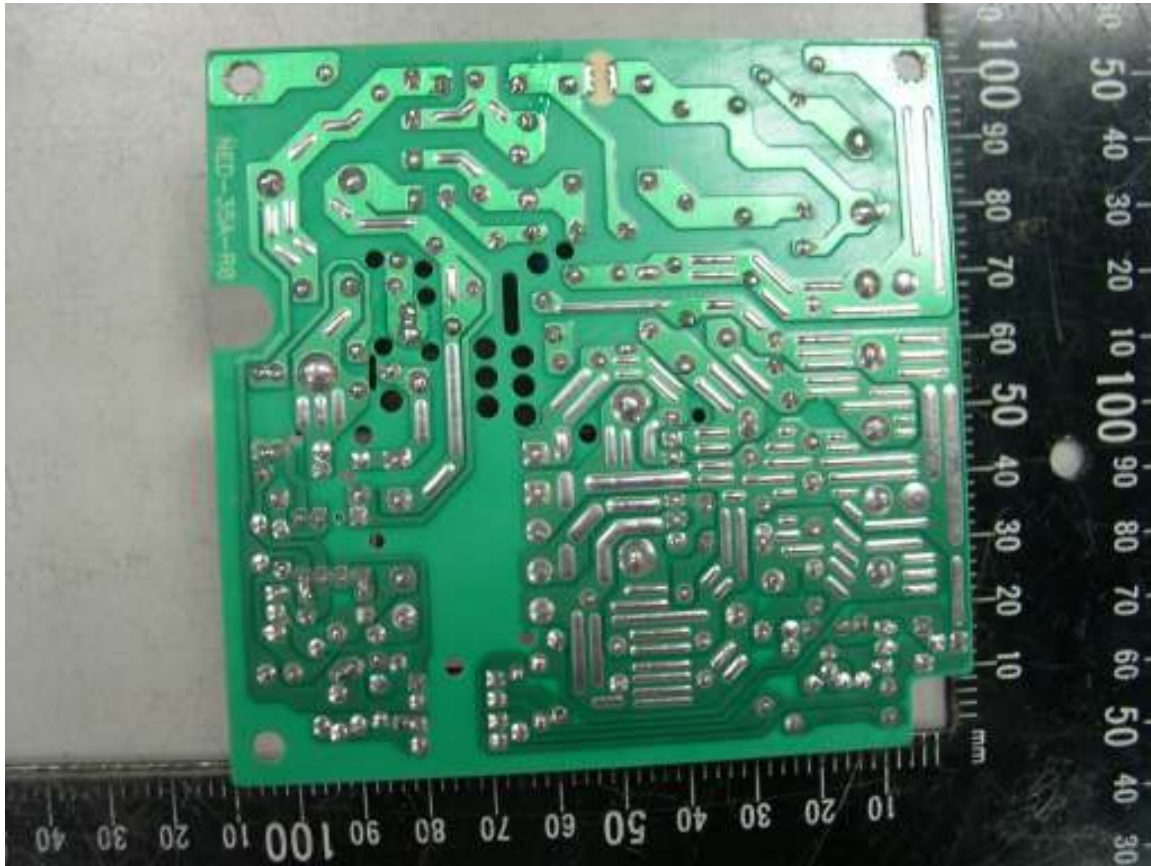


NED-35y (PCB: NED-35)

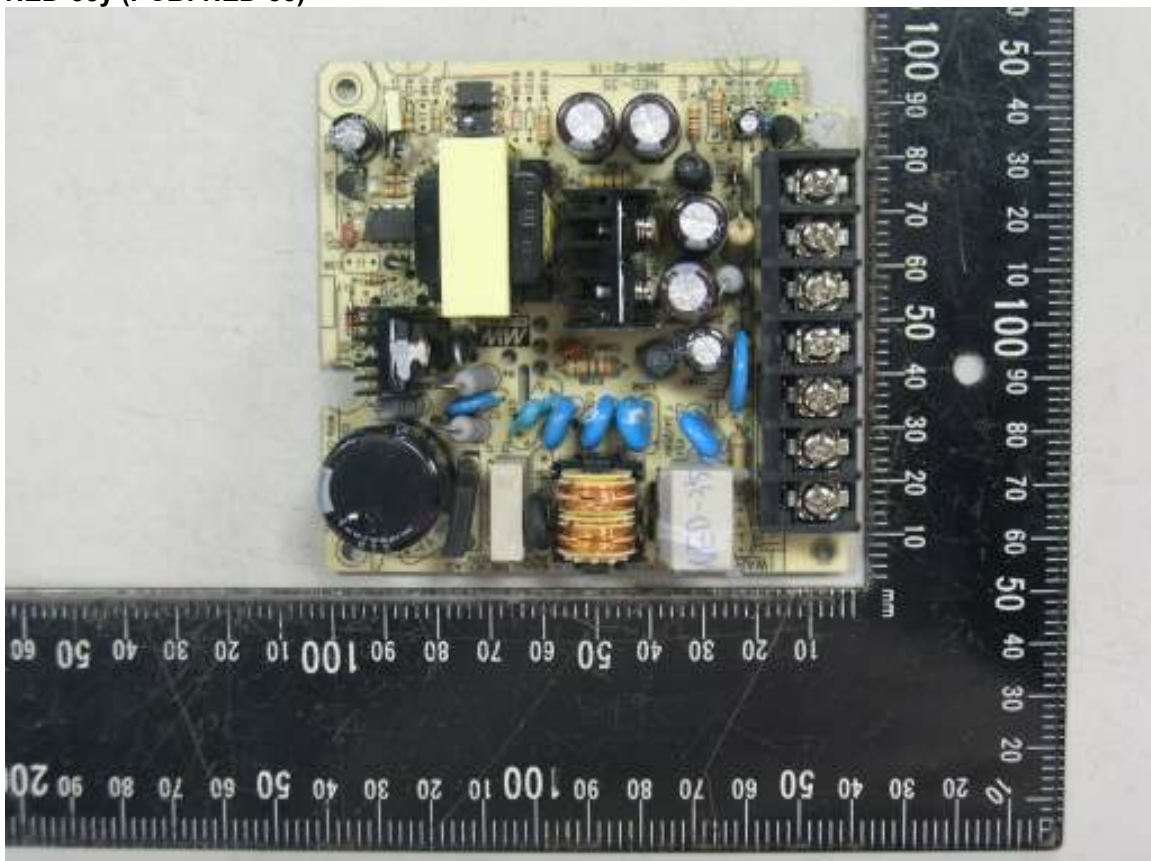


Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

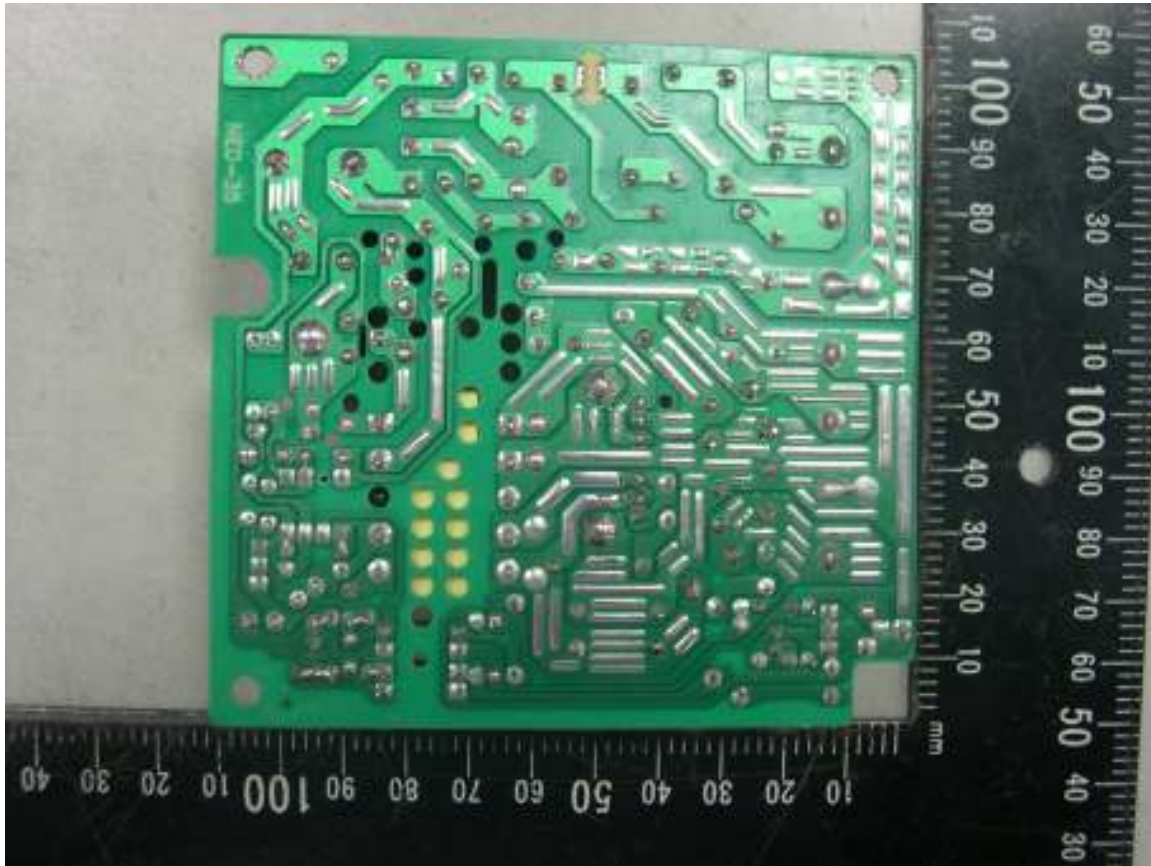


NED-35y (PCB: NED-35A)

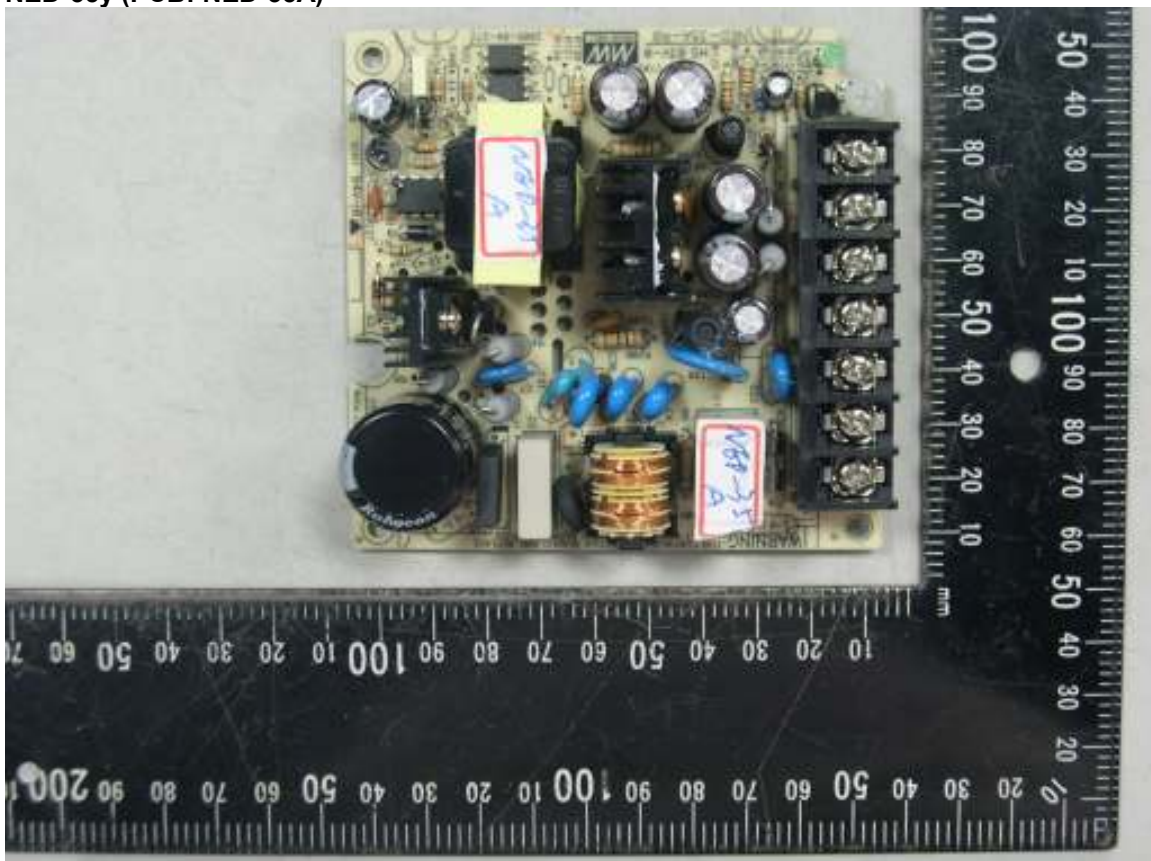

Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

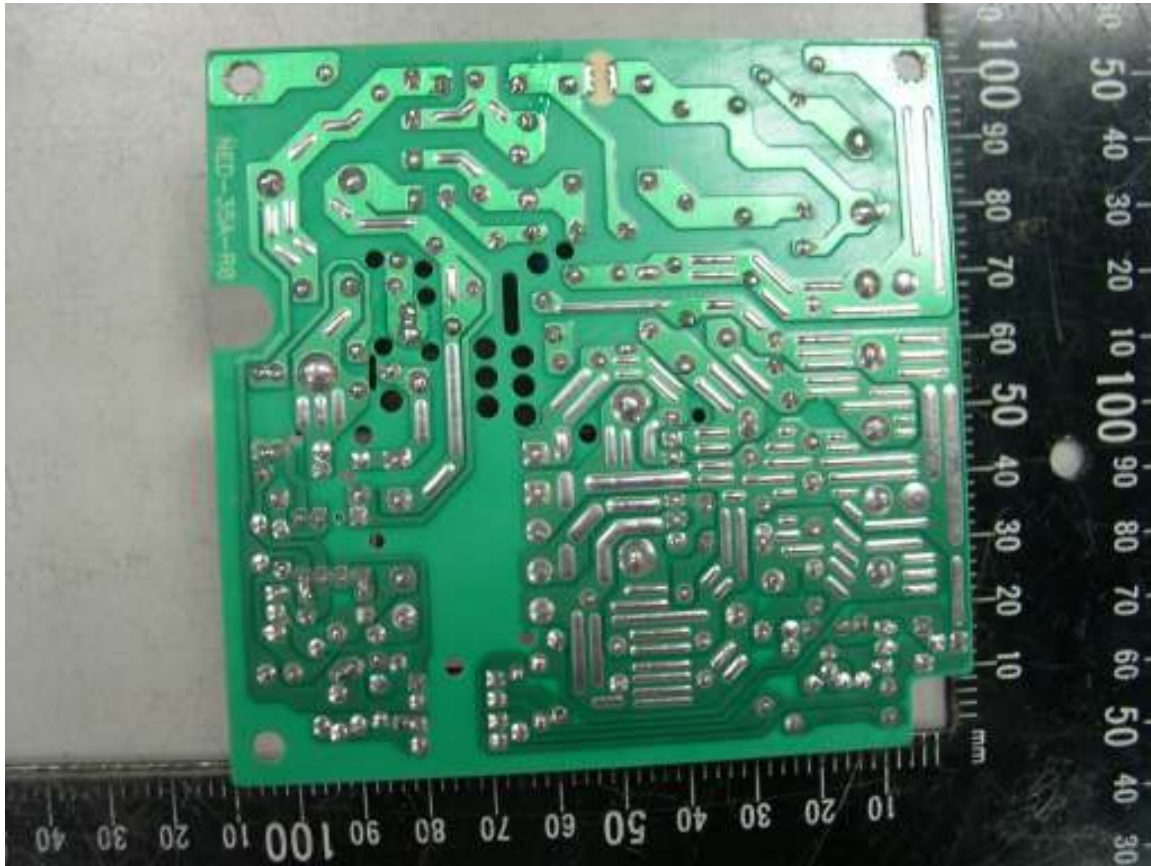


NET-35y (PCB: NET-35)



Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

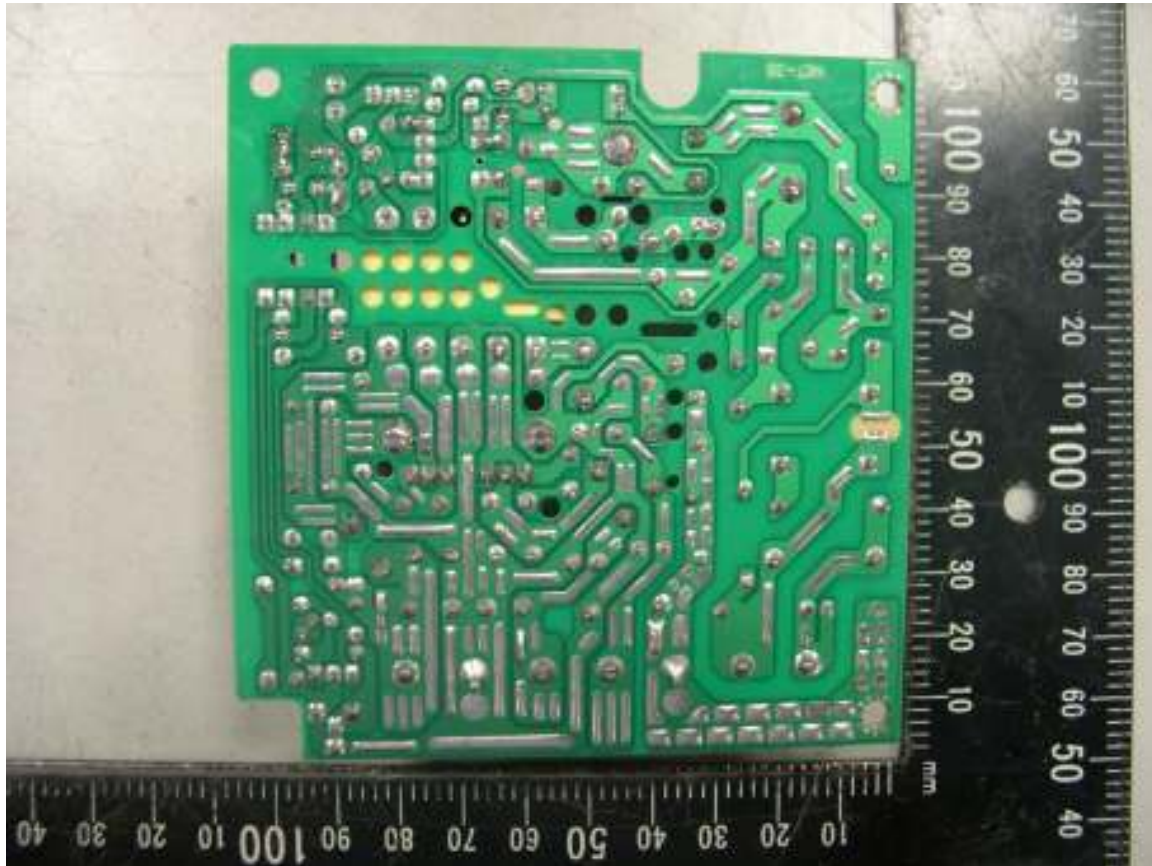


NET-35y (PCB: NET-35A)



Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

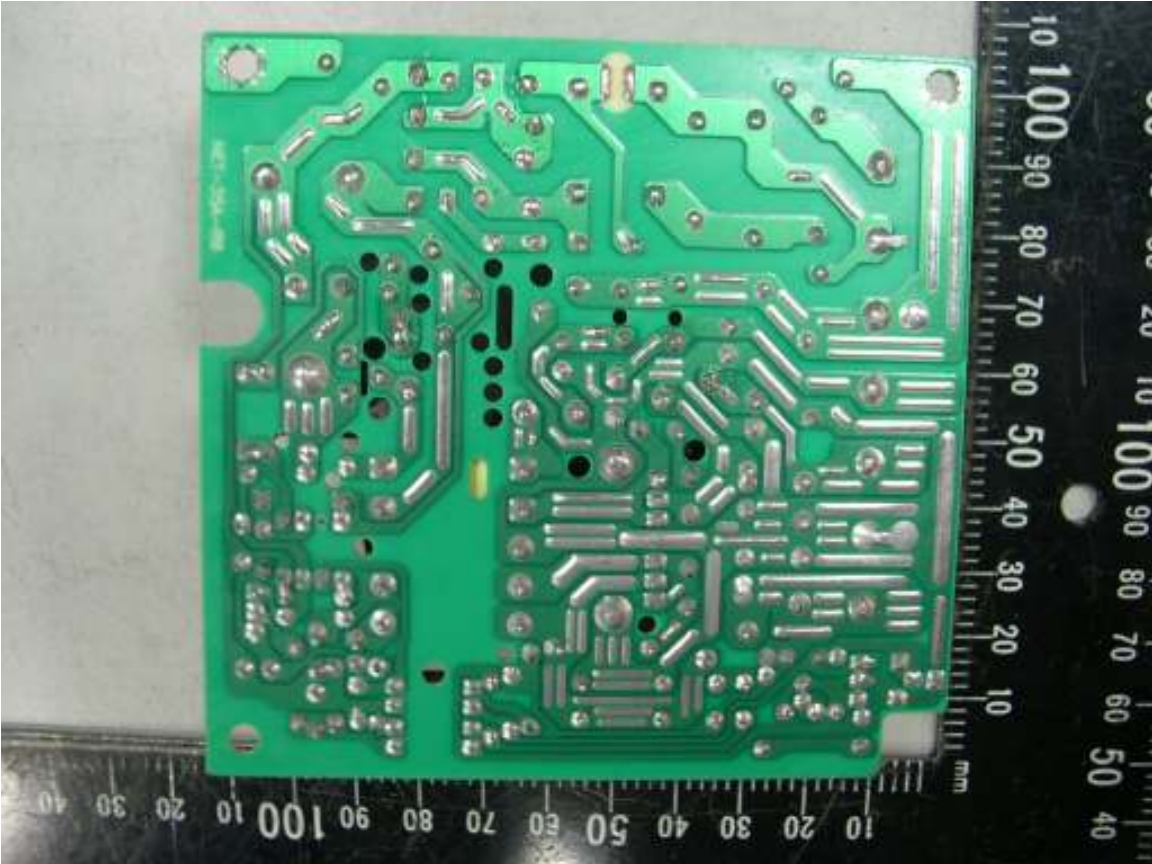

SCP-35-z (z= 12, 24) with top cover



Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

SCP-35-z (z= 12, 24) with top cover



SCP-35-z (z= 12, 24) with top cover




Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

SCP-35-z (z= 12, 24) without top cover



SCP-35-z (z= 12, 24) main board top

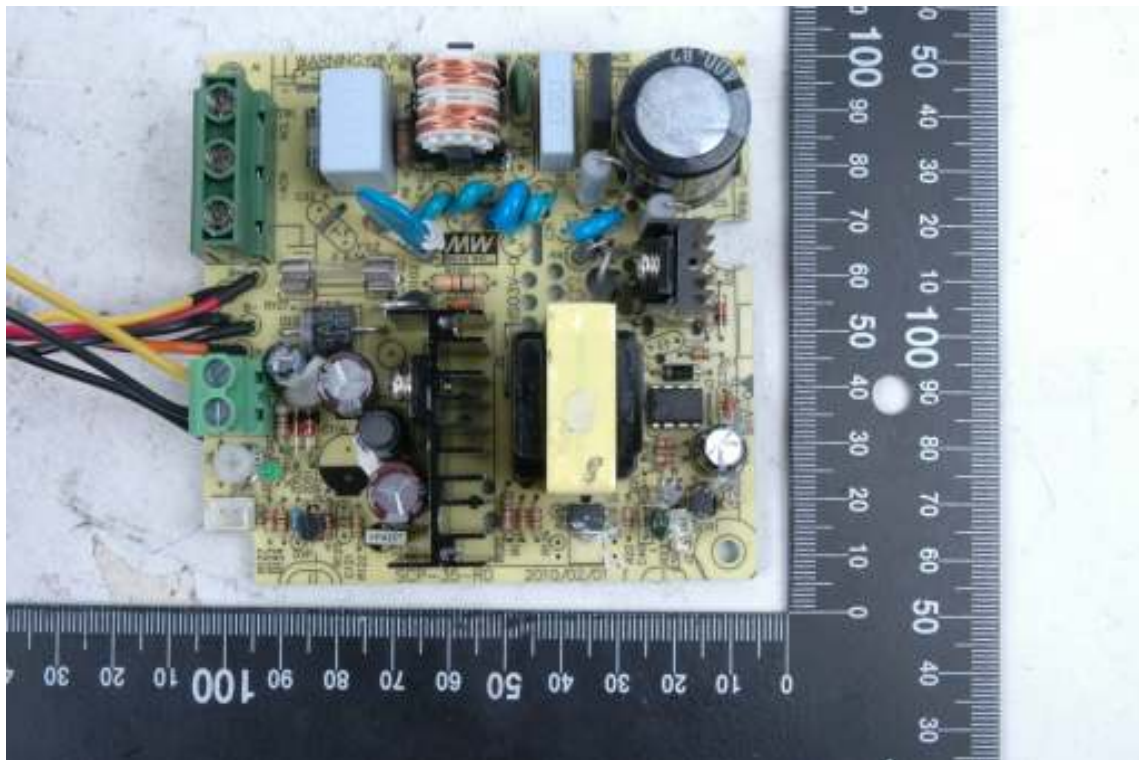

Product: Switching Power Supply

Type Designation: NEx-35y (x = S, D, T; y = -5, -12, -15, -24, -48, A, B, C, D); SCP-35-z (z= 12, 24)

SCP-35-z (z= 12, 24) main board bottom

