



未注公差/General tolerances(mm)													 0.1/10  ±2'	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20		±2.50

未标尺寸请参考3D文件

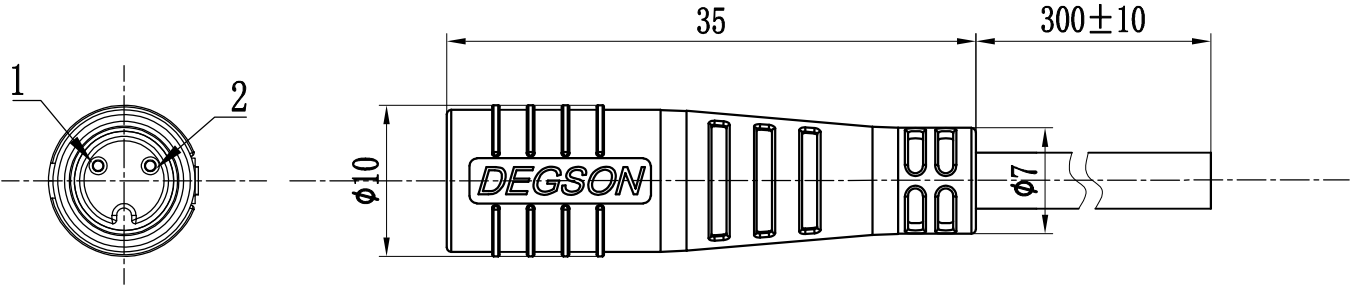

孔位标记示意

孔位	导线颜色
1	黑色
2	蓝色

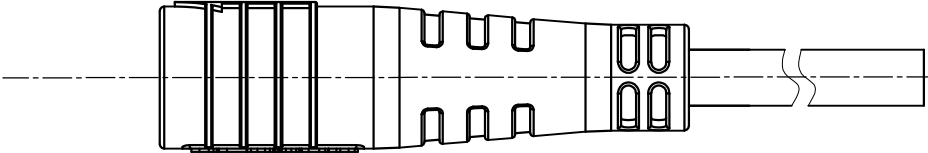


型号说明

SM-EBS-0002-F-L300-00A(H)

插座 包塑式 系列名称 母端 通用型环保产品 线长300mm

产品插针数量
功率针0pin,
PE针0pin,
信号针2pin

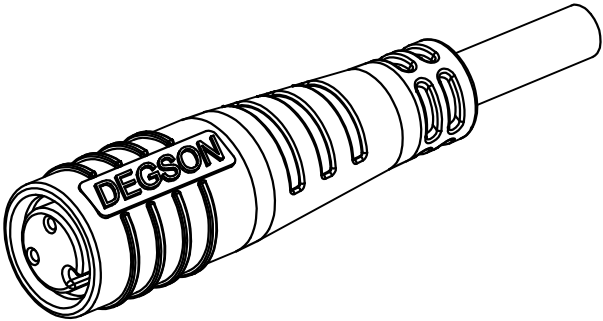

额定电压/电流/Rated Voltage/Current	48V/2A
绝缘电阻/Insulation resisance	≥30MΩ
插拔次数/Mechanical working life(mating cycles)	100
耐电压/Withstanding voltage	300V AC
使用温度范围/Operating temperature(°C)	-25~+85
防水等级/Levels of protection	IP66 (mated)
接线方式/Terminal	Soldering
导线外径范围/Wire range(mm)	3.7

MATERIAL: /		SURFACE: /			
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD:		NAME:			
CHKD:		SM-EBS-0002-F-L300-00A(H)			
DRFT: ZhuCG 2021.8.20		DRAWING NO.:		REV	TO
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1