



SP. Subminiature Basic Switches No Lever

Standard Lever Type

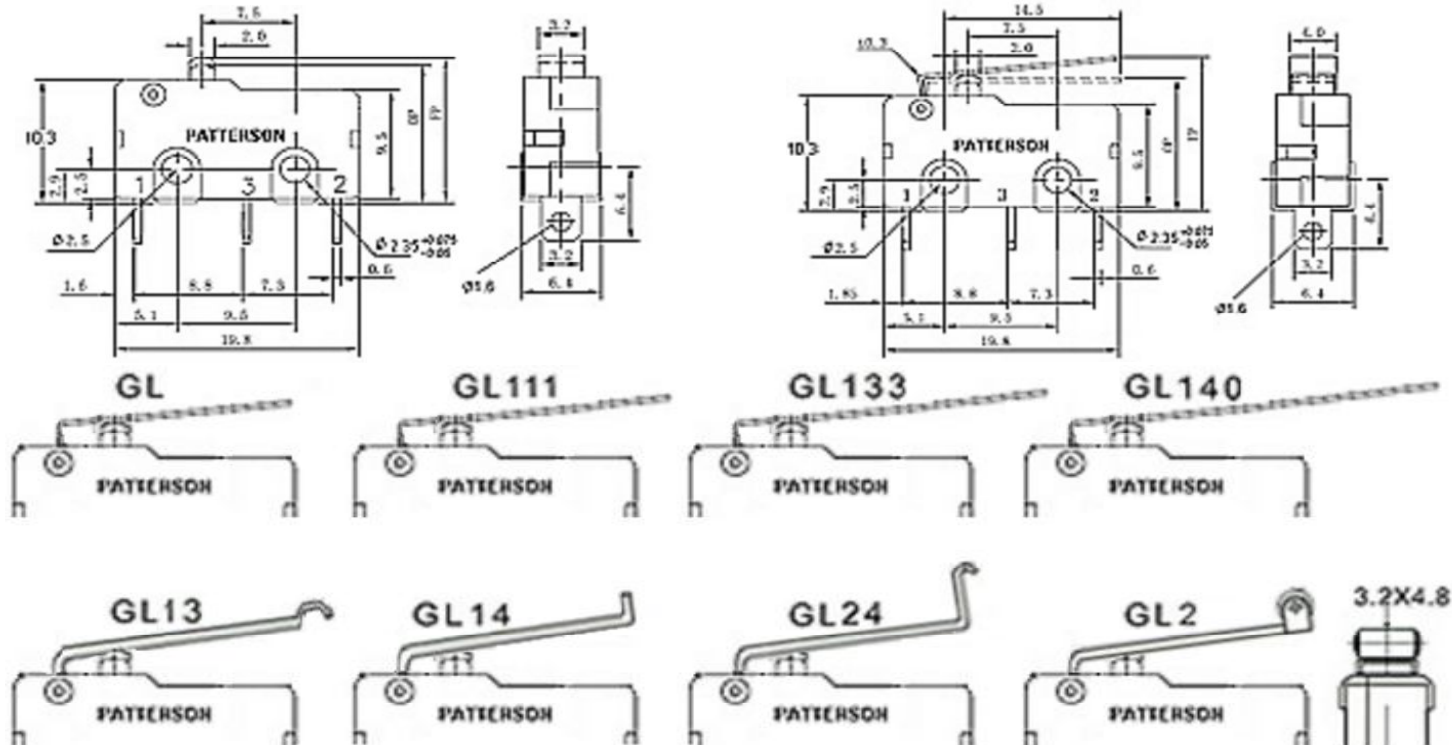


Type		SP-0 72-0							
Operation	no	GL	GL111	GL13	GL133	GL14	GL140	GL24	GL2
Lever									
OF max.	150g	50g	50g	50g	30g	50g	30g	50g	50g
RF min.	25g	6g	6g	6g	5g	6g	5g	6g	6g
PT max.	0.5mm	X	X	X	X	X	X	X	X
OT min.	0.5mm	1.2mm	1.2mm	1.2mm	1.5mm	1.2mm	1.5mm	1.2mm	1.2mm
MD max.	0.1mm	0.8mm	0.8mm	0.8mm	1.0mm	0.8mm	1.0mm	0.8mm	0.8mm
FP max OP	8.4 ±0.5mm	13.6-8.8 ±0.8mm	14.5-9.7 ±0.8mm	15.5-10.7 ±0.8mm	16.5-11.6 ±0.8mm	14.9-10.1 ±0.8mm	16.9-12.0 ±0.8mm	24.8-22.5 ±0.8mm	19.3-14.5 ±0.8mm

ORDERING INFORMATION

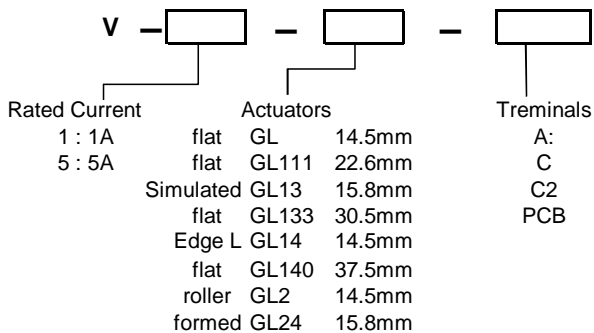


TERMINALS


Solder terminal




Quick connect terminal (#110)



PCB terminal



Mounting holes for PCB terminals

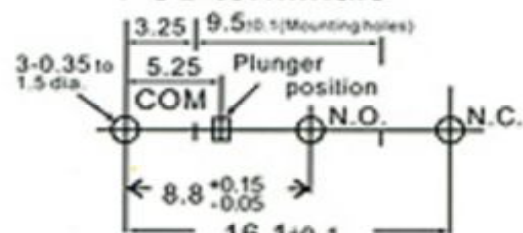

NOTE: The thickness of each terminal is 0.5mm.