

# 广东清达电子科技有限公司

## 目 录

1. 目录 (CONTENTS) .....	1
2. 承认页 (ADMIT THE PAGE) .....	2
3. 外观标准 (APPEARANCE STANDARD) .....	3
4. 技术参数 (TECHNICAL PARAMETER) .....	4-5
5. 产品图纸 (PRODUCTS DRAWING) .....	6
6. 生产流程图 (PRODUCE THE FLOW DIAGRAM) .....	7
7. RoHs 检测报告 (SGS EXAMINING REPORT)	

# 广东清达电子科技有限公司

## 品质承认书

### QUALITY ACKNOWLEDGMENT

客户名称 Client	
品名 Description	水泥电阻 SQP 系列
规格 Specification	SQP 10W
料号 Part NO	
备注 Remark	

制造商： 广东清达电子科技有限公司

客户： \_\_\_\_\_

Manufacturer: \_\_\_\_\_

Customer: \_\_\_\_\_

经手人 Prepared By	审核 Checked	核准 Approval

经手人 Prepared By	审核 Checked	核准 Approval

盖章 签字 Stamped signature	
-------------------------------	--

盖章 签字 Stamped signature	
-------------------------------	--

# 广东清达电子科技有限公司

## 水泥电阻外观标准

### APPEARANCE STANDARD OF CEMENT RESISTOR

#### 1. 主体 MAIN BODY

##### a. 印字面 Printing Words appearance

所喷印的功率、阻值、误差率、徽号等字体，必须端正及清晰

SPRAY PRINTING WORDS WITH POWER, RESISTANCE, ERROR RATE, LOGO ECT, MUST BE NEAT AND CLEAR.

##### b. 外观部分 APPEARANCE PART

产品外壳为滑石瓷质，表面光滑，无破损、致命缺损、开裂、变形和明显色差

MATERIAL OF OUT SHELL IS STEATITE CERAMIC, SMOOTH SURFACE, WITHOUT DAMAGE, BROKEN, CRACK, DEFORMATION AND OBVIOUS CHROMATISM.

##### c. 浆面标准 SIZING THICK LIQUID SURFACE STANDARD

浆面平整，无严重针孔、开裂现象。浆面高度不高于瓷壳平面或低于瓷壳平面 1MM，用胶尺铲刮浆面，浆面不易脱落

SIZING THICK LIQUID SURFACE SHOULD BE LEVEL OFF, WITHOUT SERIOUS PINHOLES, CRACKS. LENGTH OF THICK LIQUID SURFACE SHOULD BE LESS THAN CERAMIC SHELL SURFACE OR LOWER THAN CERAMIC SHELL SURFACE WITH 1MM, SHOVELED AND STRICKLED BY GLUE RULER, SURFACE WILL NOT FALL OFF EASILY.

##### d. 产品尺寸请参考附加图纸（第六页） PRODUCTS DIMENSIONS REFER TO ADD DRAWING (Page 6)

#### 2. 引脚（端子） DOWN-LEAD (terminal)

##### a. 线材 MATERIAL OF LINES

镀锡铜线或 CP 线（视贵司要求采用）线材无明显氧化现象

MATERIAL OF TINNED COPPER LINES OR CP LINES (ACCORDING TO YOUR COMPANY REQUEST) HAVE NO OBVIOUS OXIDATION APPEARANCE.

##### b. 两端出线长度 LENGTH OF TWO-TERMINAL OUT LINE

接线端位置两端长短±不多于 3MM

LENGTH OF TWO-TERMINAL SHOULD BE NOT MORE THAN  $\pm 3\text{MM}$

# 广东清达电子科技有限公司

## 技术参数

### TECHNICAL PARAMETER

#### 1. 额定电压(RATED VOLTAGE)

额定电压是在额定电力下直流电和交流电相互对应所产生的电压

额定电压= $\sqrt{\text{额定电力}(W) \times \text{电阻值}(\Omega)}$

依公式求出超越最大连续使用电压时,以最大连续使用电压为额定电压

RATED VOLTAGE MEANS THE VOLTAGE RESTRICTED BY VARIOUS DIRECT CURRENT OR ALTERNATING CURRENT UNDER THE RATED POWER.

FORMULA  $U = \sqrt{P \times R}$

U: RATED VOLTAGE (V)

P: RATED POWER (W)

R: NOMINAL RESISTANCE( $\Omega$ )

#### 2. 端子浸锡性 (TERMINAL SOLDER ABILITY)

将端子前端 7 mm 处浸入溶剂 5-10 秒,并调整焊锡温度到  $230 \pm 5^\circ\text{C}$ ,然后溶解溶剂,使溶液完全燃烧,再拭去端子上的溶剂残渣,再将端子前端 5mm 处浸入溶剂  $3 \pm 0.5$  秒,然后拿出使其自然冷却  $25.4 \pm 6.4$  秒后,再将溶剂洗去,经上述步骤后,导线需符合下列情形:

(a)端子必须至少 95% 以上焊著,且表面清洁光滑.

(b)端子孔不必集中一处,但总面积亦不可超过 10%

DIP THE TERMINAL WITHIN 7mm FROM THE EDGE INTO FLUX FOR 5 TO 10 SECONDS, THEN ADJUST THE SOLDERING TEMPERATURE TO  $230 \pm 5^\circ\text{C}$ , WIPE THE SOLDERING DREGS AND BURNED FLUX FROM THE MELTED SOLDER, NEXT DIP THE TERMINAL 5mm FOR THE EDGE, DIP TIME  $3 \pm 0.5$  SECONDS. THEN PULL IT OUT WITHIN  $25.4 \pm 6.4$  SECONDS, COOL IT IN AIR THEN WASH THE FLUX AWAY. THE LEAD WIRE SHOULD MEET FOLLOWING CONDITIONS AFTER REMOVE THE FLUX.

(a) TERMINAL SHOULD BE NEW SMOOTH WITH 95% SOLDERING AT LEAST.

(b) PIN HOLE NEEDS NOT TO CONCENTRATE IN ONE PLACE, BUT THE TOTAL AREA SHOULD NOT OVER 10%.

# 广东清达电子科技有限公司

### 3. 温度系数（参照表 3-1）TEMPERATURE RESISTANCE（PLEASE REFER TO TABLE5-1）

将电阻置入每一试验温度下约 30~45 分钟测定之，然后使用下列公式计算温度系数，各阶段试验的温度系数应在±260PPM 以内。

$$\text{温度系数} = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0} \times 10^6 \text{ (PPM/}^\circ\text{C)}$$

R: 试验后 Ω 值      T: 试验温度 (°C)      R0: 试验前 Ω 值      T0: 室温 (°C)

KEEP THE RESISTOR IN THE EVERY STAGE TEMPERATURE AROUND 30 TO 40 MIN.BY USING THE FORMULA BELOW.

AND ALSO THE TEMP.RESISE ANCE COEFFICIENT WILL BE CALCULATED.

\*TEMPERATURE RESISTANCE COEFFICIENT

$$= (R - R_0 / R_0) \times (1 / T - T_0) \times 10^6 \text{ (PPM/}^\circ\text{C)}$$

R0: RESISTANCE (Ω) IN BASE TEMP.(2nd STAGE)

R: RESISTANCE IN EVERY TESTING TEMP.STAGE.

T0: BASE TEMP. (2nd STAGE)

T: TESTING TEMP (°C)

THE TEMP.COEFFICIENT SHOULD BE WITHIN ±260°C PPM IN ALL STAGES.

表 3-1(Table3-1)

单位: °C

第 1 阶段 1st	第 2 阶段 2nd	第 3 阶段 3rd	第 4 阶段 4th	第 5 阶段 5th
-30±2	25±2	65±2	105±2	180±2

### 4. 短时间超负荷（TRANSIENT OVERLOAD）



加十倍的额定电力（W）于电阻器 5 秒钟，不生火焰或烧焦等现象。

回复常温 30 分钟后，其阻值变化率应在 2%±0.05 Ω 以内。

APPLY VOLTAGE TEN TIMES OVER RATED POWER FOR FIVE SECONDS, NO CHANGE IN MECHANICAL APPEARANCE. THEN PUT IN NORMAL TEMPERATURE CONDITION FOR 30 MIN. THE VARIANCE OF VALUE SHOULD BE WITHIN (2%±0.05 Ω).

# 广东清达电子科技有限公司

## 水泥电阻器 SQP 系列 CEMENT RESISTORS SQP SERIES

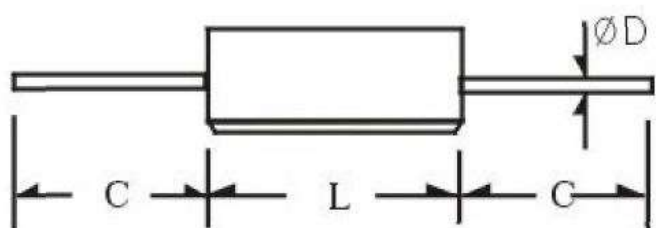

### ■ 规格尺寸 Specifications and Dimensions

品名功率 Part No.	尺寸 Dimensions(mm)					阻值范围 Resistance range		成型类型
	L±1.5	W±1	H±1	C±3	D±0.05	绕线 Wire coiling	氧化棒 Oxide rod	Forming Type
10W	48	9.5	9.5	21	0.7	0.1R~680R	680R~33K	B

设计制作  
Designed

审核  
Checked

核准  
Approval

# 广东清达电子科技有限公司

## 生产流程图 Producing Technological Process

