
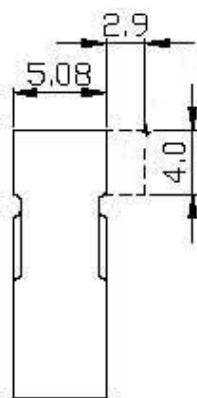


所有材料為  
"環保材料"

2006.7.10

RoHS

SPECIFICATION:  
 PITCH BETWEEN POLES : 2.54mm  
 CURRENT RATING : 3A  
 VOLTAGE RATING : 250V AC/DC  
 CONTACT RESISTANCE : INITIAL VALUE/10mΩ max.  
 AFTER ENVIRONMENTAL TESTING/20mΩ max.  
 INSULATION RESISTANCE : 1000MΩ (min.)  
 WITHSTAND VOLTAGE : 1000V AC/MINUTE  
 TEMPERATURE RANGE : -25°C TO +85°C  
 APPLICABLE WIRE : AWG #22 TO #28  
 FEATURES:  
 MATERIAL : PBT UL94V-0  
 ACCEPTS : CM-T2540 \_ CRIMP TERMINAL

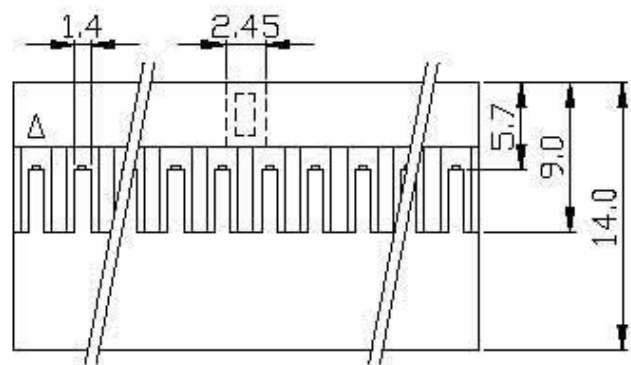

Dimensional and Order information

Circuits	Dimensions mm		Circuits	Dimensions mm	
	A	B		A	B
			42	50.80	53.34
4	2.54	5.08	44	53.34	55.88
6	5.08	7.62	46	55.88	58.42
8	7.62	10.16	48	58.42	60.96
10	10.16	12.70	50	60.96	63.50
12	12.70	15.24	52	63.50	66.04
14	15.24	17.78	54	66.04	66.58
16	17.78	20.32	56	66.58	71.72
18	20.32	22.86	58	71.72	73.66
20	22.86	25.40	60	73.66	76.20
22	25.40	27.94	62	76.20	78.74
24	27.94	30.48	64	78.74	81.28
26	30.48	33.02	66	81.28	83.82
28	33.02	35.56	68	83.82	86.36
30	35.56	38.10	70	86.36	88.90
32	38.10	40.64	72	88.90	91.44
34	40.64	43.18	74	91.44	93.98
36	43.18	45.72	76	93.98	96.52
38	45.72	48.26	78	96.52	99.06
40	48.26	50.80	80	99.06	101.60

PART NO: (料 號) <b>YY092Cxx</b>	DESCRIPTION(內容):	DRAWN(製圖): Kevin	GENERAL TOLERANCE: (公差) .000 ±0.08 .00 ±0.15 .0 ±0.25	REV: <b>R3</b>	REV	DESCRIPTION	DATE
	CHECKED(確認): Mardy	UNIT: mm		<b>R0</b>	2006.07.10		
	DWG NO(圖號)	APPROVAL(核准): Johnny	SCALE(比例): FREE	SIZE: A4	<b>R1</b>	變更環保字樣	2006.08.17
				SHEET: 1/1	<b>R2</b>	修改接觸阻抗單位	2006.11.16
				<b>R3</b>	2007年圖面版本更新	2007.07.30	