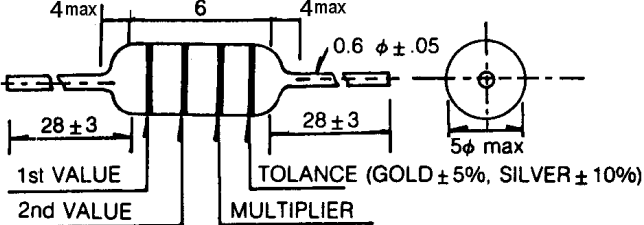



# SPECIFICATION

DATE:2021-7-22

Customer		Issue No D:	
Model No AL0510-10uH	Part No	Ordering Code	
<b>Mechanical</b> <b>Unit : mm</b> 		1st VALUE	Brown
		2nd VALUE	Black
		MULTIPLIER	Black
		TOLANCE	Silver
<b>Electrical Requirements</b>		<b>Schematic</b>	
Tested Condition <input checked="" type="checkbox"/> 1KHz / 0.25V			
Poles			
Wire	φ 0.15mm (2uew)		
Turns	17.5Ts		
Inductance	10uH±10%		
D.C.R(OHM)	0.25 Ω Max		
Q	20Min		
IDC (MA)	1000 MAX		
<b>Tested Instrument</b>			
<input checked="" type="checkbox"/> LCR Meter Chen Hwa 100 <input type="checkbox"/> RF Auto Meter 9480		1.环保  2.CP脚	
<input type="checkbox"/> LCR Meter HM2790 <input type="checkbox"/> RF Auto Meter 9460			
<input type="checkbox"/> Q Meter HP 4342A <input type="checkbox"/> RF Auto Meter 9481			
<input type="checkbox"/> HL 2770 <input type="checkbox"/>			
Temp	-20℃~+100℃		
Material	Standardized	<b>Supplier / Manufactory</b>	
Core	PR51 DRWW 4x6	Super Power or Eguivalent	
Pins	0.6x29.5 / 0.6x29.5mm	Super Power	
Wire	φ 0.15mm(2uew)	Pacific Thai or Eguivalent	
Coating Epoxy.	Green	Home Town or Li Bang	
Packing			
制 表 员		唐秀珍      样品确认	

保存

YL-FOR-0702G    A/0

请确认回传: