



Notes: (unless otherwise specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: 125-7925
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 09/15/14	Ray 09/15/14	Ray 09/15/14

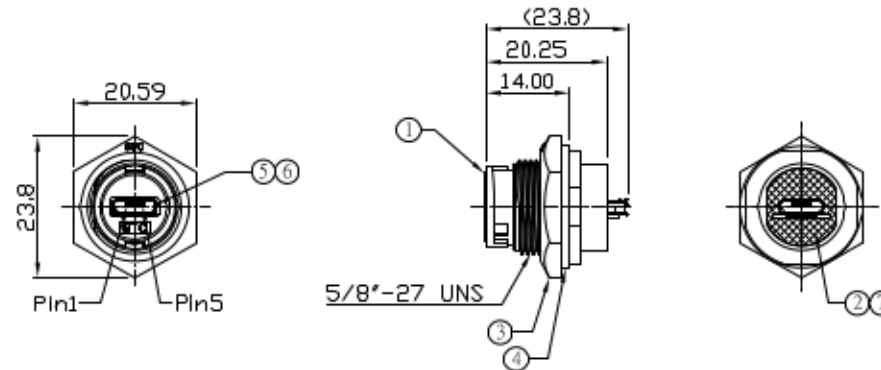

Recommend  
Panel Cut-Out

7	Glue	Epoxy Color: Black	
6	Mirco USB-AB Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	2
5	PCB	FR-4 Color: -	1
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Molding	PVC Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

TITLE							REV.	
Mirco USB-AB Plastic C2 Panel Jack Lock With Mirco USB-AB Coupler							01	
	B	1:1	Lucas 09/15/14	Ray 09/15/14	Ray 09/15/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT
								1/1

<p>RS Stock No 135-9769</p>
---------------------------------