


Material: NYLON66

Fire rating: 94V-2

working temperature: -20°C -120°C

Dimension description: M3*5*6 (ID3*OD5*TH6)

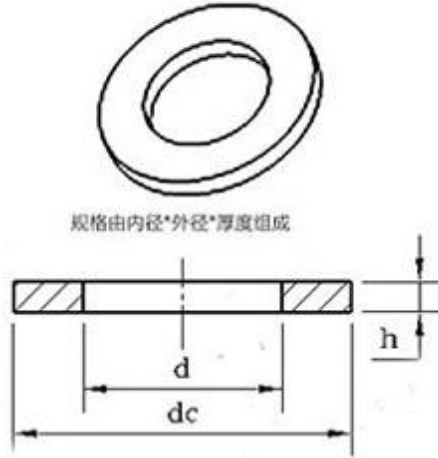

Nominal diameter	Nomina	d	Tolerance	Nominal	dc	Tolerance	h
1	1.1		+0.12 0	3		-0.25	0.3
1.2	1.3			3.2		-0.3 0	
1.4	1.5			3.5			
1.6	1.7			4			
2	2.2		+0.16 0	5		-0.36 0	0.5
2.5	2.7			6.5			
3	3.2			7			
4	4.2			9			
5	5.3		+0.2 0	10		-0.43 0	1.5
6	6.4			12.5			
8	8.4			17			
10	10.5			21			
12	13		+0.24 0	24		-0.52 0	2
14	15			28			
16	17			30			
18	19			34			
20	21		+0.28 0	37		-0.62 0	3
22	23			39			
24	25			44			
27	28			50			
30	31		+0.34 0	56		-0.74 0	4
36	37			66			
42	43			78			
48	50			92			

单位: mm 垫圈规格: 内径*外径*厚度 多大螺栓配套多大内径垫圈