

Product specification: Universal U type

Operating temperature: PE-40°C~65°C (instantaneous up to 80°C)

Custom made: PP-30°C~90°C (instantaneous up to 110°C)


Material: Nylon PA66

Metal material: brass, iron screws

Color: Black/white

Applicable voltage: 250~450V

Note: The product parameter data and size data are all measured manually by the engineering department of our company. The final specific size is subject to the received material.

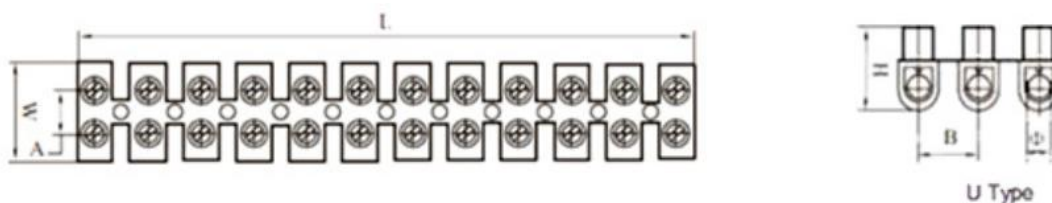

编号 Item NO.	L(mm)	W(mm)	H(mm)	A(mm)	B(mm)	孔径Φ Aperture (mm)	额定电压 Rated Voltage (V)	额定电流 Rated Current (A)	电线范围 Wire Range (mm ²)
TBS-3A	90.3	15.5	11.5	6	7.7	3.1	380	3	2.5-4.0
TBS-6A	110.5	15.5	12.4	6.5	9.5	3.2	380	6	4.0-6.0
TBS-10A	116.7	20	14.9	8	10	4	380	10	6.0-10
TBS-16A	136.8	21.5	16.7	10	11.7	4.2	380	16	10.0-12.0
TBS20A	153.5	24.5	17.4	11.5	13.2	4.3	380	20	12.0-14.0
TBS-30A	164.6	25	18.8	12	14.1	5.5	380	30	16
TBS-60A	187.6	29	23.5	12	16	6.8	380	60	25
TBS-80A	205	33	27	15	17	7.0	400	80	35
TBS-100A	250	46	31	22	21	9.0	400	100	40