

Tel: (909)596-6298
 Fax: (888)HO-CHIEN

HO CHIEN ELECTRONIC GROUP, INC.

COMPONENT PROFESSIONALS

2557 Series

**0.078" x 0.078" (2mm) ctr. IDC Socket for .039" (1mm) ctr
 flat ribbon cable**

Materials:

Contact: Phosphor Bronze


Contact Plating: Selective Gold

Contact Underplating: 0.00254mm [0.000100"] min. Nickel

Insulation: PBT & 30% glass fiber reinforced thermo plastic: UL94V-0

Color: Black

Recommended Cable: 0.039" ctr. Ribbon Cable **FC-XX-100**

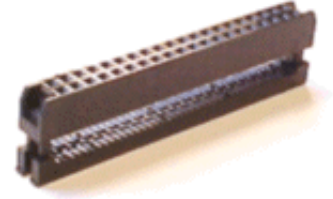

Electrical:

Contact Current Rating: 1 Amp

Contact resistance: 20 Milliohms Max.

Insulation Resistance: 1000 Megohms @ 1000V AC

Dielectric Withstanding: 500V AC min. rms

Operation Temperature: -40°C to +105°C

Ordering Part Number

2557 -
□□
- □
- □
Series Number
Number of Positions
Contact Plating Gold
Bump
Strain relief

6, 8, 10, 12, 14, 16
18, 20, 22, 24, 26
30, 34, 36, 40, 44
50, 60, 64


Blank: Gold Flash
GT: Gold Flash Selected
F: 10u" (min. qty.)
E: 15u" (min. qty.)
D: 30u" (min. qty.)

Blank: W/O Bump, W/O Strain Relief.
3: W/O Bump, W Strain Relief.
B: W Bump, W/O Strain Relief.
3B: W Bump, W Strain Relief.

Plug Key Part Number: 2557-KW (White Color), 2557-KB (Black Color)

Quantirt: 10K per bag.

Ribbon Cable: FC-XX-100

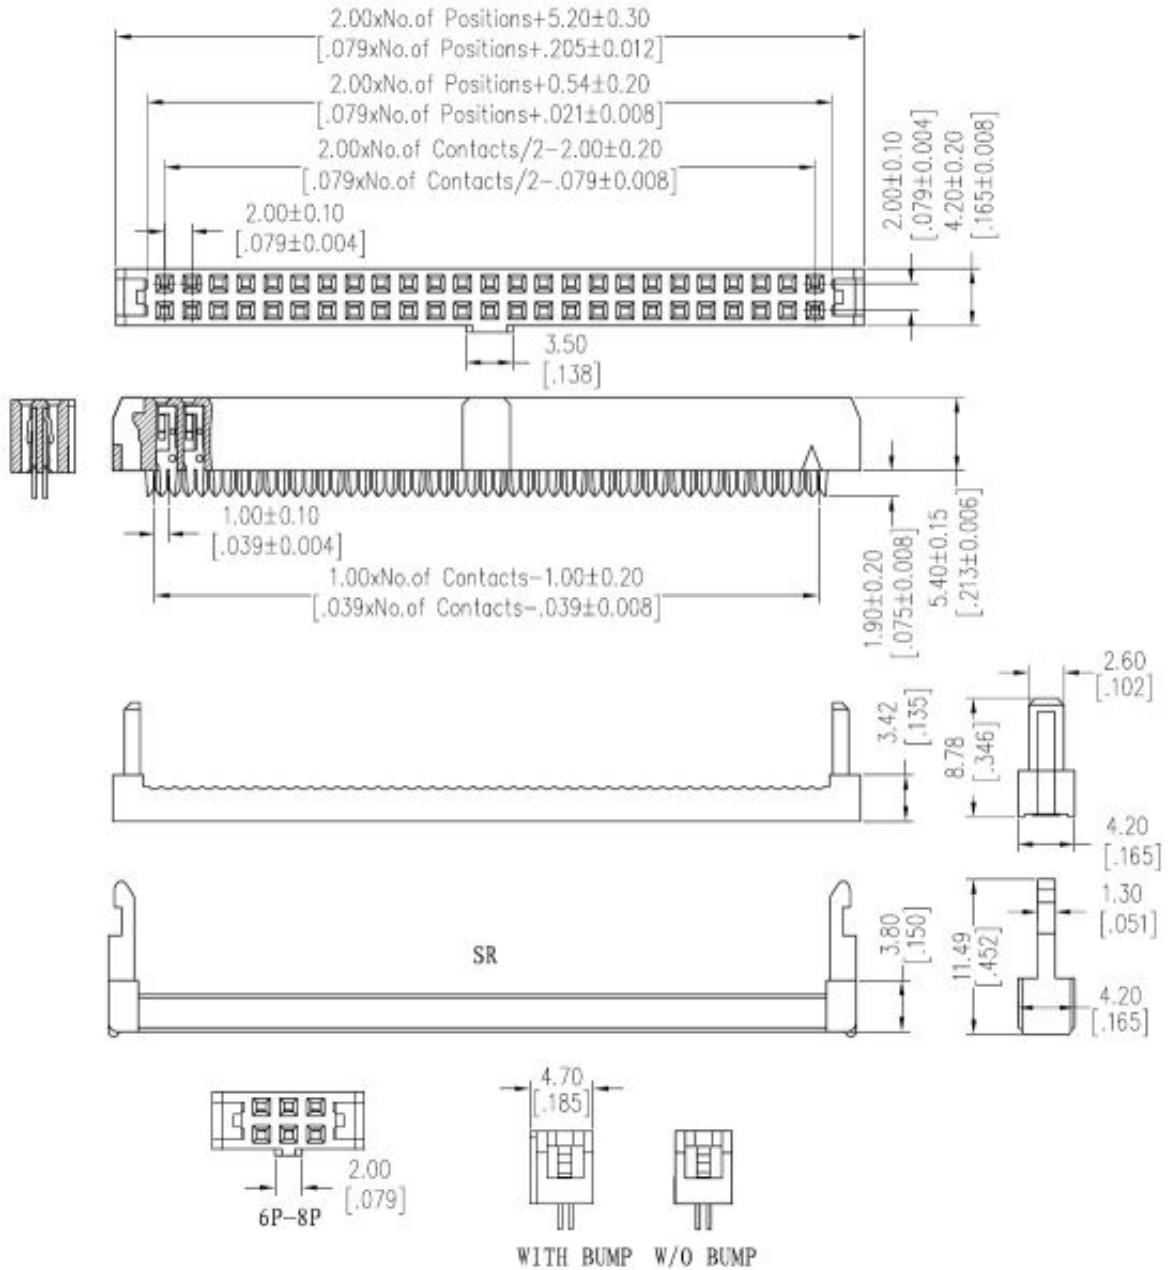

| [Main Menu](#) | [Online catalog](#) | [Local Rep](#) | [Distribution](#) |
 | [News](#) | [Company](#) | [Request Form](#) | [E-Mail](#) |

Copyright © 1995-2014 Ho Chien Electronic Group, Inc. All rights reserved.