

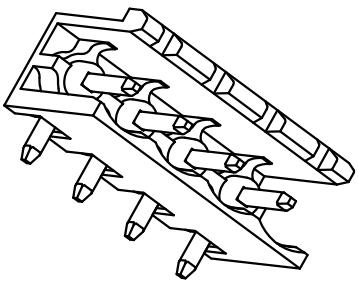
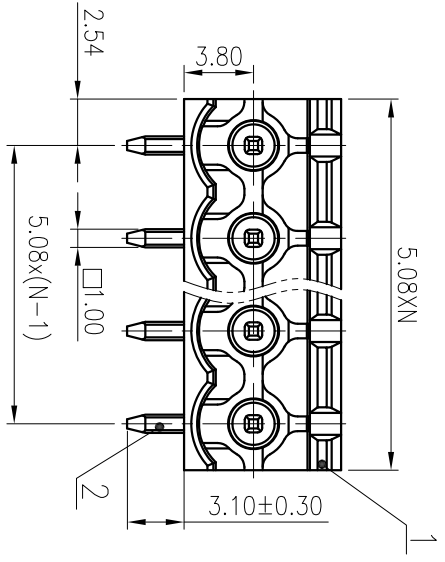
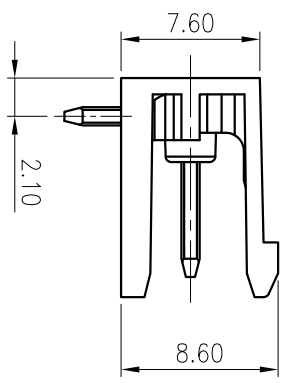


公差表/General Tolerances(mm)	
0	~
>3	~
3	~
6	~
10	~
18	~
30	~
50	~
80	~
120	~
180	~
250	~
315	~
400	~
500	~
>500	~
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z

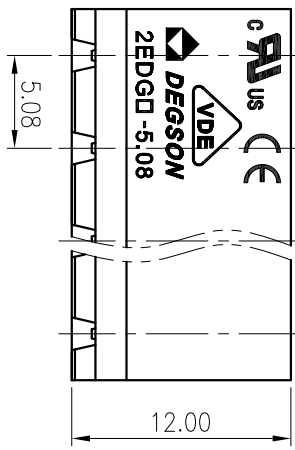

PCB LAYOUT

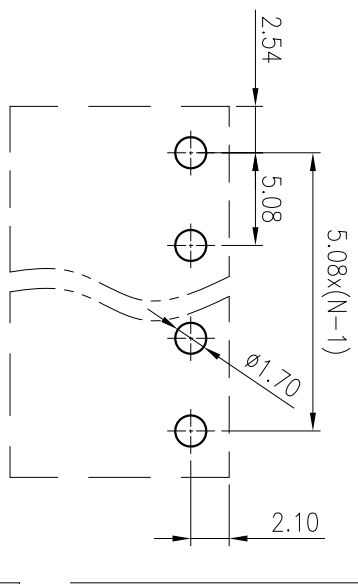

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
UL 标准/UL Standard:			D
额定电压/Rated Voltage(V)	Current(A)	300/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20
额定冲击电压/Rate Impulse Voltage(KV)		/	4
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~24P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: SURFACE: /

MAT NO.: /

STATUS: /

APPD: LonCHH 2020.05.13

CHKD: GongYzh 2020.05.13

DRFT: LY 2020.05.13

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

2EDGR-5.08-XXP-1Y-100A(H)

DRAWING NO.: 10001949

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE	SCALE	SHEET
1					A4	2.5:1	1/1

A B C D

A B C D