



2SC2482 TRANSISTOR (NPN)

FEATURE

- High Voltage : $V_{CE0}=300V$
- Small Collector Output Capacitance: $C_{ob}=3.0pF(Typ)$

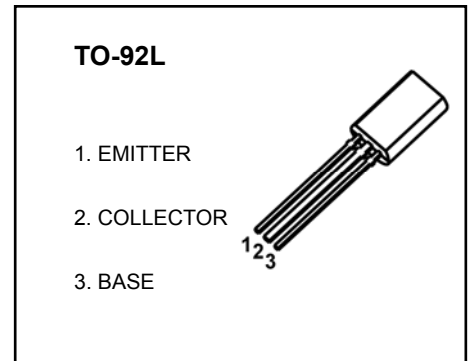


MARKING

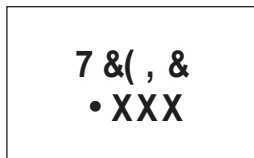

B C2482=Device code
 C Soliddot= Greenmdding compound device,
 E if none, the normal device
 XXX=Code

Equivalent Circuit



ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
2SC2482	TO-92L	Bulk	500pcs/Bag
2SC2482-TA	TO-92L	Tape	2000pcs/Box

MAXIMUM RATINGS ($T_a=25^{\circ}C$ unless otherwise noted)


Symbol Para	meter	Value	Unit
V_{CBO}	Collector-Base Voltage	300	V
V_{CEO}	Collector-Emitter Voltage	300	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current -Continuous	0.1	A
P_C	Collector Power Dissipation	0.9	W
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature	-55~+150	$^{\circ}C$

$T_a=25^\circ\text{C}$ unless otherwise specified

Parameter Symbol		Test conditions M	in	Typ	Max	Unit
Collector-base breakdown voltage	$V(\text{BR})_{\text{CBO}}$	$I_C=100\mu\text{A}, I_E=0$	300			V
Collector-emitter breakdown voltage	$V(\text{BR})_{\text{CEO}}$	$I_C=3\text{mA}, I_B=0$	300			V
Emitter-base breakdown voltage	$V(\text{BR})_{\text{EBO}}$	$I_E=100\mu\text{A}, I_C=0$	7			V
Collector cut-off current	I_{CBO}	$V_{\text{CB}}=240\text{V}, I_E=0$			1.0	μA
Collector cut-off current	I_{CEO}	$V_{\text{CB}}=220\text{V}, I_B=0$			5.0	μA
Emitter cut-off current	I_{EBO}	$V_{\text{EB}}=7\text{V}, I_C=0$			1.0	μA
DC current gain	h_{FE}	$V_{\text{CE}}=10\text{V}, I_C=20\text{mA}$	30		150	
Collector-emitter saturation voltage	$V_{\text{CE(sat)}}$	$I_C=10\text{mA}, I_B=1\text{mA}$			1.0	V
Base-emitter saturation voltage	$V_{\text{BE(sat)}}$	$I_C=10\text{mA}, I_B=1\text{mA}$			1.0	V
Transition frequency	f_T	$V_{\text{CE}}=10\text{V}, I_C=20\text{mA}, f=30\text{MHz}$	50			MHz
Collector output capacitance	C_{ob}	$V_{\text{CB}}=20\text{V}, I_E=0, f=1\text{MHz}$		3		pF


CLASSIFICATION OF h_{FE}

Rank	O	Y
Range	30-90	90-150

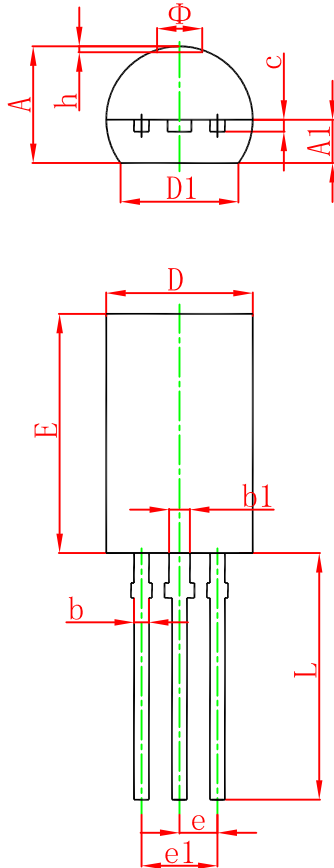

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	3.750	4.050	0.148	0.159
A1	1.280	1.580	0.050	0.062
b	0.380	0.550	0.015	0.022
b1	0.620	0.780	0.024	0.031
c	0.350	0.450	0.014	0.018
D	4.750	5.050	0.187	0.199
D1	4.000		0.157	
E	7.850	8.150	0.309	0.321
e	1.270 TYP.		0.050 TYP.	
e1	2.440	2.640	0.096	0.104
L	13.800	14.200	0.543	0.559
Φ		1.600		0.063
h	0.000	0.300	0.000	0.012


TO-92L Suggested Pad Layout

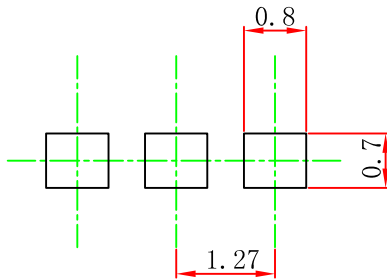

- Note:
1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05 mm.
 3. The pad layout is for reference purposes only.


NOTICE

Mobicon Holdings Ltd reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Mobicon does not assume any liability arising out of the application or use of any product described herein.

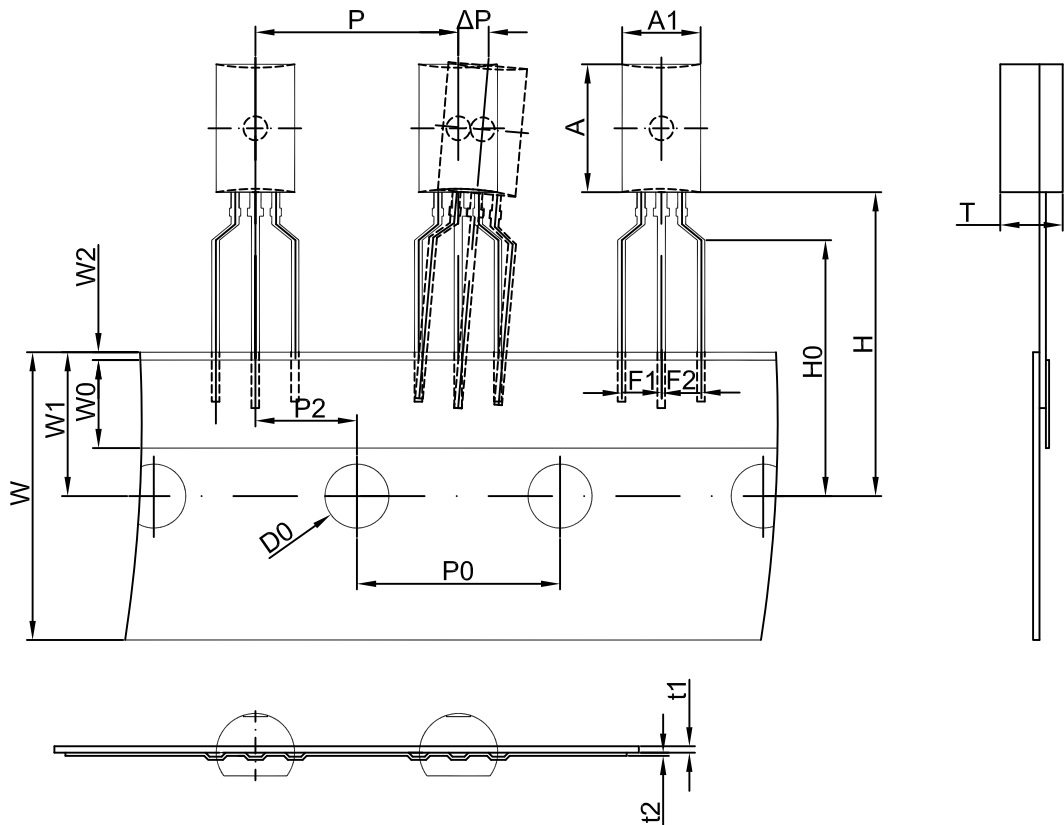

Dimensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.9	8.0	3.9	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0	19.0	16.0	4.0	0.4	0.2	0

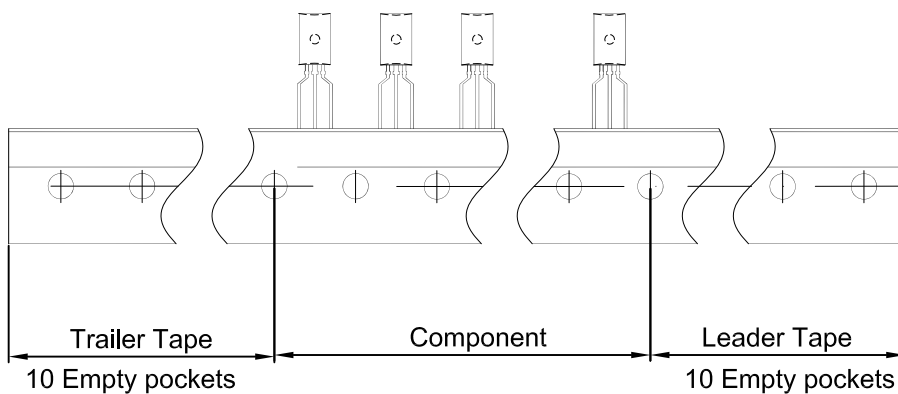

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92L	2000 pcs	333×203×42	20,000 pcs	493×400×264