

NP-TP-OK压力传感器-300PSI/ NP-TP-OK pressure sensor-300PSI



FEATURES AND APPLICATIONS


Using stainless steel shell, advanced pressure ceramic core and dedicated processing chip;
High precision, small size, light weight, easy to install and operate; Stable performance,
long-term drift, long life; Perfect EMC protection;

Matching models: Universal.

技术参数参照表

| | | | |
|---|--|---------------------------------|-------------------------|
| 零件号/Number: | / | 防爆等级/ Blowout prevention level: | IP65 |
| 材料/Material: | 304不锈钢 | 响应时间/ Response time: | < 10ms |
| 供电电压/Supply: | 5±0.25VDC | 制作工艺/Process: | 压阻式/Piezoresistive type |
| 螺纹接口/Thread interface: | NPT1/8 | 输出型号/ Output type: | 模拟型/ Simulation |
| 量程/Range: | 0~300PSI | 输出方式/ Output: | 三线制/ Three wire |
| 输出信号/OUT: | 0.5~4.5V | | |
| 过载压力/Pressure overload: | 2倍满量程压力/2 times the pressure of full scale | | |
| 爆破压力/Burst pressure: | 3倍满量程压力/3 times the pressure of full scale | | |
| 综合精度(非线性+重复性+迟滞)/Comprehensive precision (nonlinear, repeatability and hysteresis): | ±1% FS (0~80° C) ±1.5%FS (-20~100° C) ±3%FS (-40~125° C) | | |
| 电气连接/Electrical connections: | 三芯Packard连接器或相关接头/Three core Packard jointl connector or related | | |

外围接线/Peripheral connection

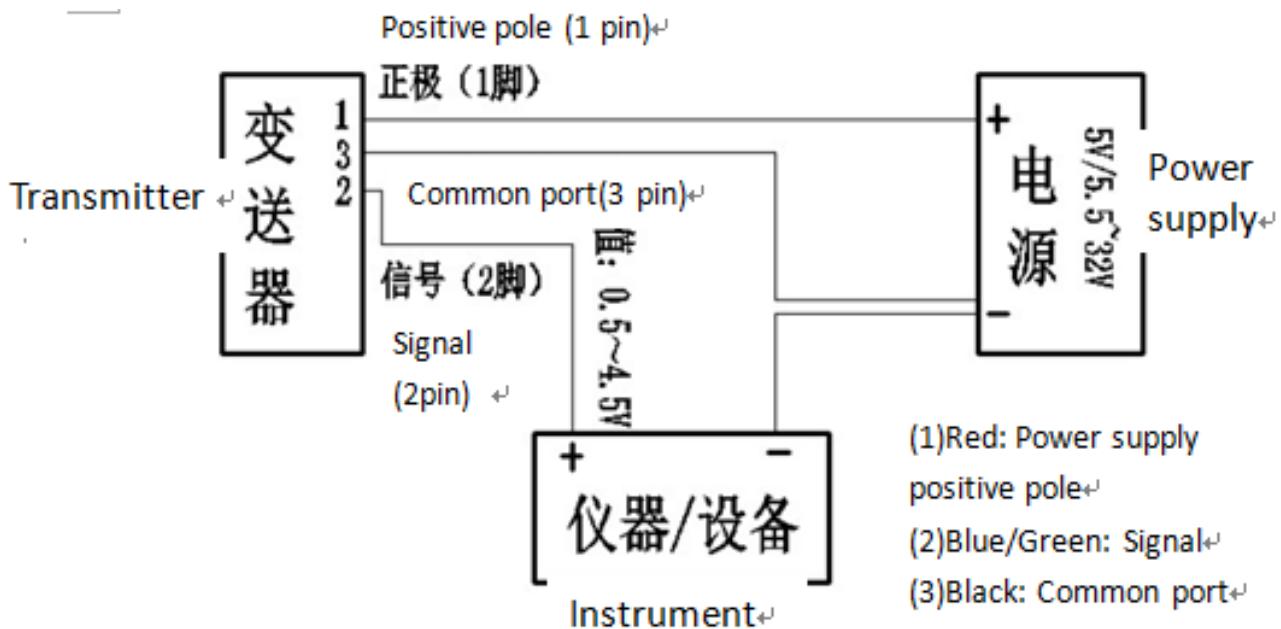

产品尺寸/定义/Size/Definition

