

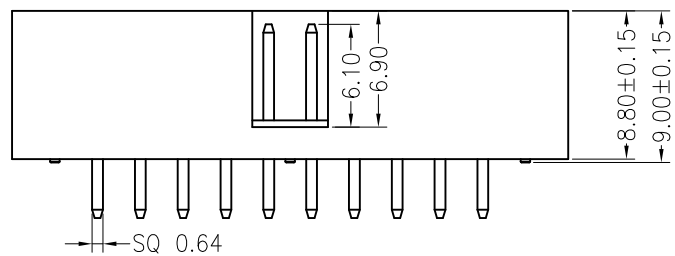
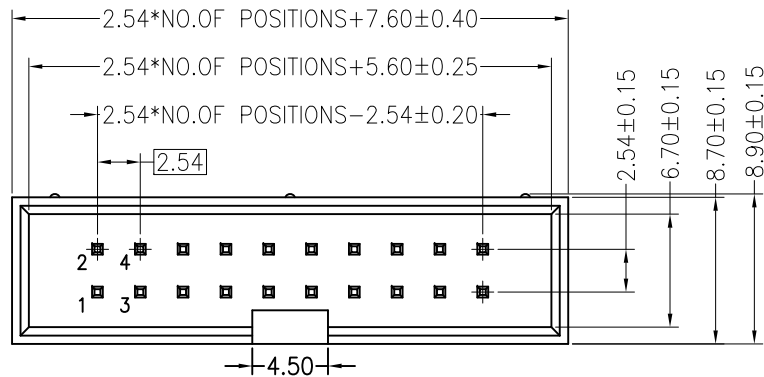


NOTES:

Voltage Rating:125V,AC/DC
 Current Rating:3.0 AMP,AC/DC
 Dielectric Withstand Voltage:500V,AC/Minute
 Contact Voltage:20 mΩ Max
 Insulation Voltage:1000 mΩ Min
 Operation Temperature:-40°C to +105°C
 Insulator Material:Polyester,UL94 V-0
 Contact Material:Brass
 Contact Plating:Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout
 P.C.B Board Tolerance±0.05

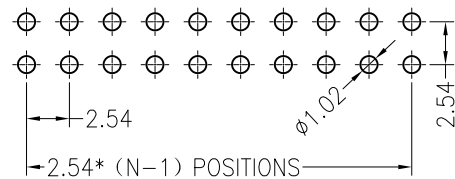

NEW PART NUMBER

BH C 88 - XX S XX
 Housing Height NO.of Pins Contact Plating
 88=8.80 6*64P G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 SN=Tin Plated

B K00 N X 1
 Color Packing
 B=Black 0=PE Bag
 A=Tray T=Tube

Dimension antitheses list		
item	PC	L
Standard	3.30	11.50
Alternate	---	---

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Helen	2011/03/28
				DIM	TOL			
A0	2011/03/28	NEW		X.X	±0.40	DESIGN	Jenny	2011/03/28
				X.XX	±0.25	CHECK	Franck	2011/03/28
				X.XXX	±0.15	APPROVE	Steven	2011/03/28
				Angle	±3°			

LPI 深圳市起德电子科技有限公司
 SHEN ZHEN QIDE ELECTRONIC TECHNOLOGY CO.,LTD

PART NO.	BHC88-XXSXXBK00NX1	UNIT	mm
TITLE	2.54mm Box Header,H=8.8,180°DIP	SCALE	1:1
Customer NO.	---	SHEET	1/1
		PROJ.	☉