


# 2-POLE 160~350 Amp Series (GX TAPE WITH AUXILIARY CONTACT)



Amp Series	Housings:	Contacts	Contact Barrel Size (AWG)	Current Rating (Amps)	Voltage Rating (Volts)	Max. Wire Insulation Diameter (mm)	Contact Retention Force(lbs)	Avg. Connection/ Disconnect (lbs)	Operating Temperature Range°C	Flammability Rating of Housing Material
175 Amp Series	BMCGX2M-RED	BMCGM35AG	2	160	600V	19.05	300	25	-20°C to 125°C	UL94V-2
	BMCGX2M-BLUE									
	BMCGX2M-YELLOW									
	BMCGX2M-ORANGE	BMCGM60AG	1/0	175						
	BMCGX2M-GREEN									
	BMCGX2M-GREY									
350 Amp Series	BMCGX2L-RED	BMCGL35AG	2	160	600V	27.94	500	30	-20°C to 125°C	UL94V-2
	BMCGX2L-BLUE	BMCGL70AG	2/0	250						
	BMCGX2L-YELLOW	BMCGL80AG	3/0	275						
	BMCGX2L-BLACK	BMCGL100AG	4/0	300						
	BMCGX2L-GREEN	BMCGL150AG	300mcm	350						
	BMCGX2L-GREY									

## ACCESSORIES-CONNECTOR CABLE CLAMPS

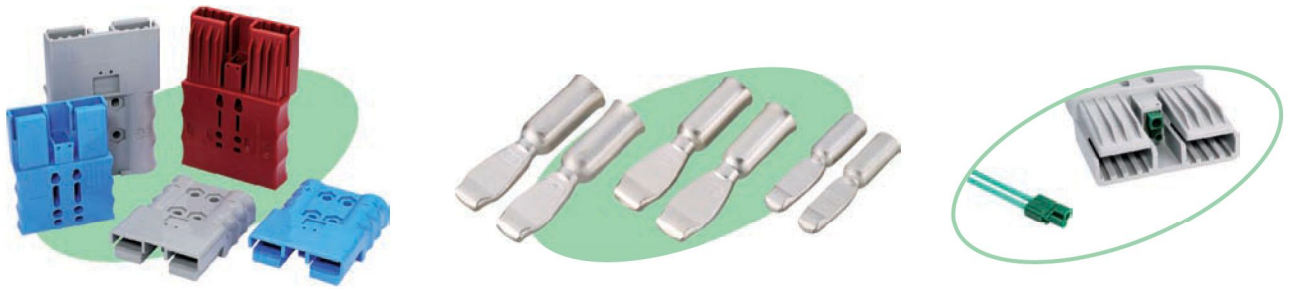

**BMC2S-FP** for 2S (50Amp) Series  
**BMC2M-FP** for 2M (175Amp) Series

