
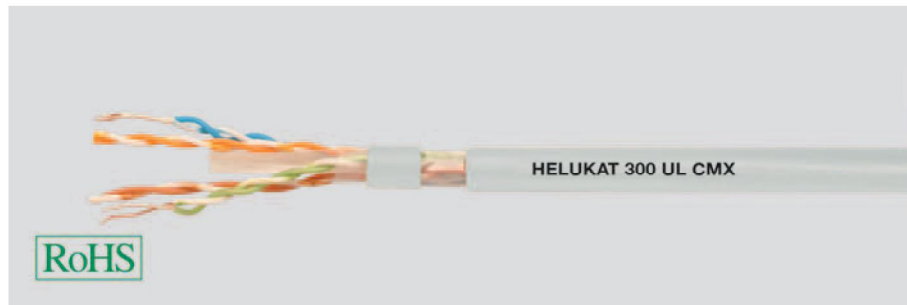


LAN Cable

Category 6

HELUKAT® 300

U/UTP UL




Cable structure

Inner conductor Ø:	0,55 mm
Conductor material:	Copper, bare
Core insulation:	PE
Core colours:	whbu/bu, whog/og, whgn/gn, whbn/bn
Shielding 1:	Polyester foil over stranded bundle
Screen over stranding element:	-
Screen 1 over stranding:	-
Screen 2 over stranding:	-
Outer sheath material:	PVC
Outer diameter:	app. 6,3 mm
Outer sheath colour:	Grey

U/UTP 4x2xAWG 24/1 PVC, UL

Electrical data

Characteristic impedance:	100 Ohm ± 15 ohm at 1 to 100 MHz 100 Ohm ± 20 Ohm at 101 to 300 MHz
Loop resistance:	190 Ohm/km max.
Mutual capacitance:	50 nF/km nom.
Rel. propagation velocity:	67 %

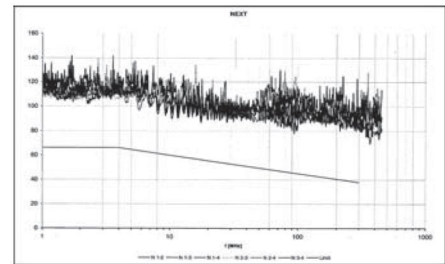


Typical values

Frequency (MHz)	10	16	62,5	100	155	200	300
Attenuation (db/100m)	5,6	7,0	14,3	18,2	22,9	26,0	32,5
Next (db)	72,0	70,0	65,0	63,0	60,0	57,0	55,0
ACR (db)	66,4	63,0	50,7	44,8	37,1	31,0	22,5

Technical data

Weight:	app. 46 kg/km
bending radius, repeated:	55 mm
Operating temperature range min.:	-20°C
Operating temperature range max.:	+60°C
Caloric load, approx. value:	0,68 MJ/m
Copper weight:	20,00 kg/km

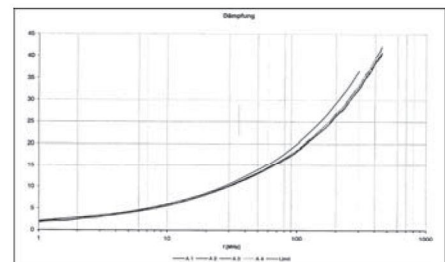

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 6, Flame-retardant acc. to IEC 60332-1, Smoke density acc. to IEC 61034, CMX 444

Application

HELUKAT®300 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s, or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction. This type is certified according UL because of the special PVC jacket

Part no.

802172, U/UTP 4x2xAWG24/1 PVC UL (UTP)

Dimensions and specifications may be changed without prior notice.