


# D-SUB DIP STRAIGHT TYPE (FEMALE)

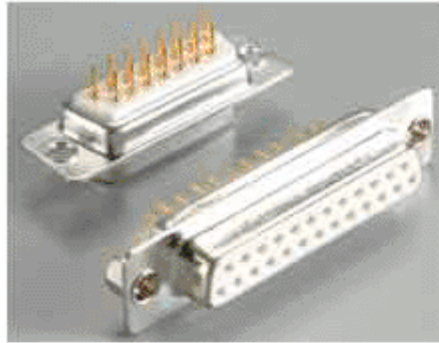


## SPECIFICATIONS :

- \*Contact Resistance : 30mΩ max. at DC 100mA
- \*Insulator Resistance : 1000MΩ min. at DC 500V
- \*Current Rating : 5 AMP


## DIELECTRIC WITHSTANDING :

- \*Voltage : AC 1000V For 1 minute
- \*Operating Temperature : -55°C ~ +105°C
- \*Contact : Brass Or Phosphor Bronze
- \*Housing : PBT & 30% Glass Fiber (UL 94-0)

Female



Position	A±0.25	B±0.25	C±0.25	Position	A±0.25	B±0.25	C±0.25
9	30.80	25.00	16.30	37	89.40	63.50	54.80
15	39.20	33.32	24.70	50	88.90	61.11	52.34
25	53.05	47.04	38.40				

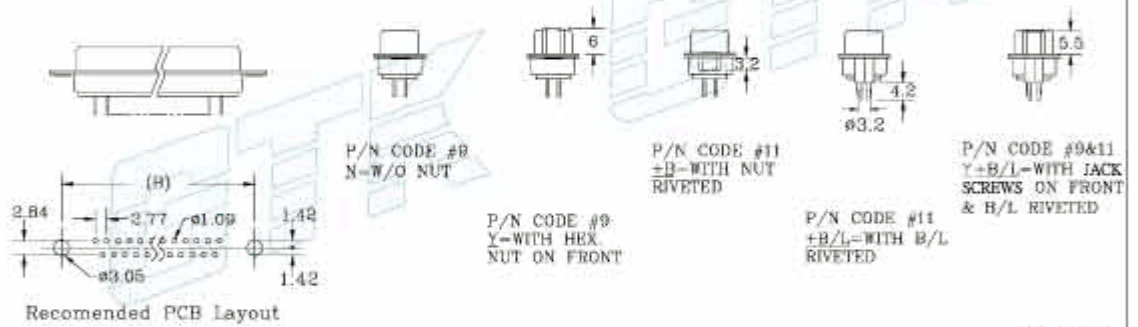

Recommended PCB Layout

UNIT : mm

Ordering Information STANDARD DIMENSION: SHOW P/N END TO CODE #10  
SPECIAL DIMENSION: KEEP SHOWING CODE #11-12 (PS. 標準碼為10碼, 第11, 12碼硬需要加註於標準碼後)

D	B	S	09	S	T	K	2	N	S	+	B/L	-	01E
1	2	3	4	5	6	7	8	9	10		11		12

- |  |  |   |
|--|--|---|
| <p>1. SERIES NO (產品系列):<br/>D = D-SUB</p> <p>2. SHELL SIZE (外觀尺寸)<br/>E = 09, A=15, B=25,<br/>C=37, D=50</p> <p>3. SERIES TYPE (產品型式)<br/>S = DIP 180° TYPE (插板式)</p> <p>4. NO. OF CONTACT (端子數):<br/>09, 15, 25, 37</p> <p>5. CONTACT TYPE (連接器類別):<br/>S = FEMALE (母座)</p> | <p>6. SHELL PLATING (前殼電鍍):<br/>T = TIN SHELL (鍍錫)<br/>N = NICKEL (鍍鎳)<br/>C = CHROMATED SHELL (鍍五彩)</p> <p>7. INSULATOR COLOR (膠芯顏色):<br/>K = BLACK (黑色)<br/>B = BLUE (藍色)<br/>W = WHITE (白色)</p> <p>8. SHELL TYPE (外觀類別):<br/>2 = W/O DIMPLE (外殼無壓花)</p> | <p>9. PARTS OPTION ON FRONT (前殼附件選擇):<br/>N = W/O. NUT (無螺母)<br/>Y = WITH JACK SCREWS (4#40UNC)<br/>ON FRONT (前殼有六角母螺絲)</p> <p>10. PIN TYPE (端子類別):<br/>S = STAMPED PIN (沖壓端子)<br/>M = MACHINED PIN (車床端子)</p> <p>11. PARTS OPTION ON BACK (後殼附件選擇):<br/>B/L = WITH BOARDLOCK RIVETED (後卯魚叉)<br/>B = WITH NUT RIVETED (後卯螺母)</p> <p>12. SPECIAL DESIGN (特殊設計)<br/>01E</p> |
|--|--|---|

GOLD-TEK ELECTRIC CO., LTD. 億群電氣股份有限公司 TEL: (03)355-9935 FAX: (03)355-9788/355-9790 D\*S-GTK-1-2