

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN.27.06
B		Modify Plated	DEC.18.06
C		MODIFY P/N	JUN. 20'11

RoHS COMPLIANT

MATERIAL


- *Housing : 30% Glass Filled PBT UL94V-0.
- *Contact : Phosphor Bronze.
- *Plated : Tin Plated On Terminal & Gold Plated On Contact.

SPECIFICATION



- *Current Rating : 2 AMP.
- *Dielectric Withstanding Voltage : AC 1000V For 1 minute.
- *Insulator Resistance : 1000M Ω min. at DC 500V.
- *Contact Resistance : 30m Ω max. at DC 100mA.
- *Operation Temperature : - 55°C to + 105°C.

PART_NO :
D * F ** ST * C


- X Length : 1 = 4.0 mm
3 = 2.5 mm
- Position No : D6 = 64 , 32 Pin
D5 = 32 , 16 Pin
- Series No : 6 = Pitch 2.54 mm
5 = Pitch 5.08 mm

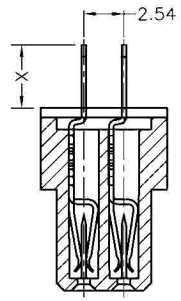

Section: B-B
Scale: 2/1

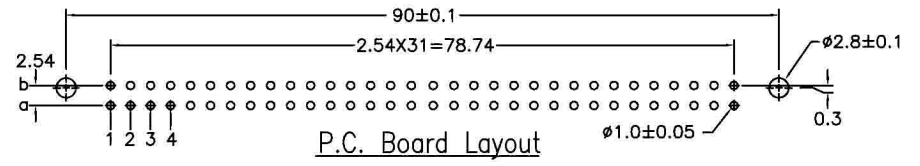

P.C. Board Layout

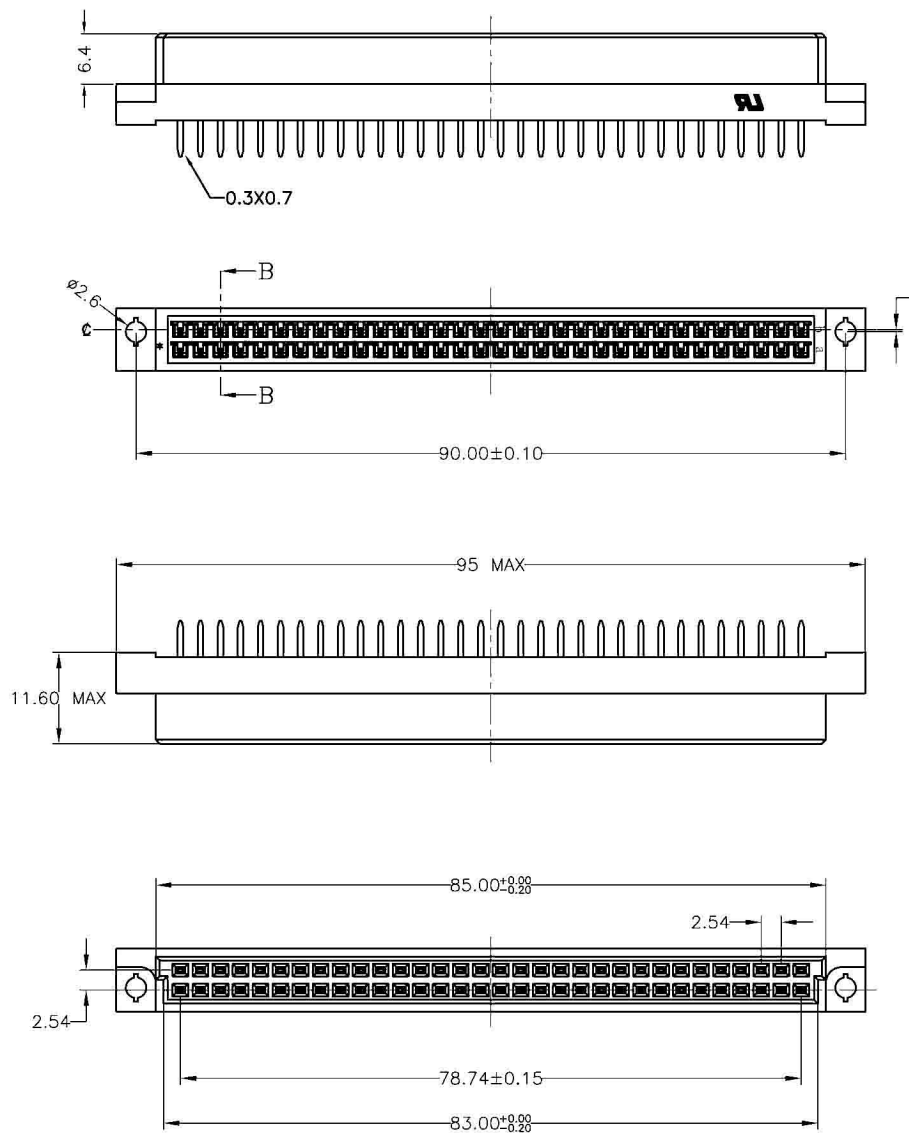

1	2	length						
4.0	2.5	X						
D5 5.08mm	32	a b		D6 2.54mm	64	a b		
	16	a -			32	a -		
Pitch	Position	Rows With Contacts	Contact Arrange	Pitch	Position	Rows With Contacts	Contact Arrange	

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	
X. ± 0.5	X° ±	UNITS
.X ± 0.25	.X° ±	MM
.XX ± 0.13	.XX° ±	SCALE
.XXX ±	.XXX° ±	SIZE
APPD		A4
CHKD		
DRAW	Z	JUN. 20'2011

GTK GOLD-TEK ELECTRIC CO., LTD.

TITLE: DIN41612 B Type Female 2 Row 180°

PART NO. **D6(5)F**ST*C**

CAD NO. I145

F:\PDF\SOC\SOC-0518

SHEET 1 OF 1

圖面編號: GTKSD1903-C(1)