


DIN41612 B TYPE MALE (2ROW 90°)

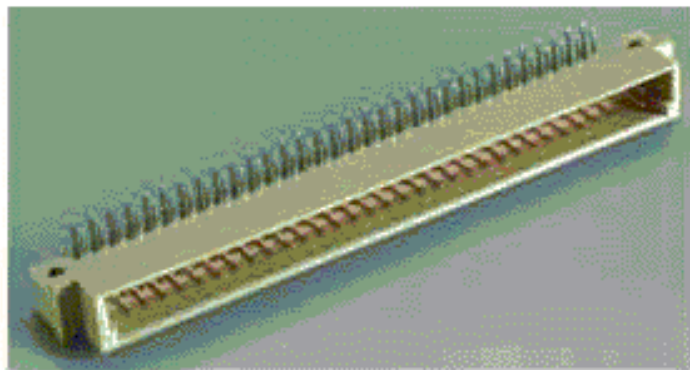

MATERIAL

*Housing : 30% Glass Filled PBT UL94V-0.

*Contact : Brass.

SPECIFICATION



*Current Rating : 2 AMP.

*Dielectric Withstanding Voltage : AC 1000V For 1 minute.

*Insulator Resistance : 1000M Ω min. at DC 500V.

*Contact Resistance : 30m Ω max. at DC 100mA.

*Operation Temperature : - 55°C to + 105°C.

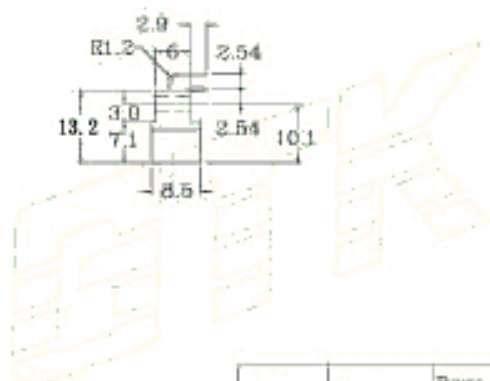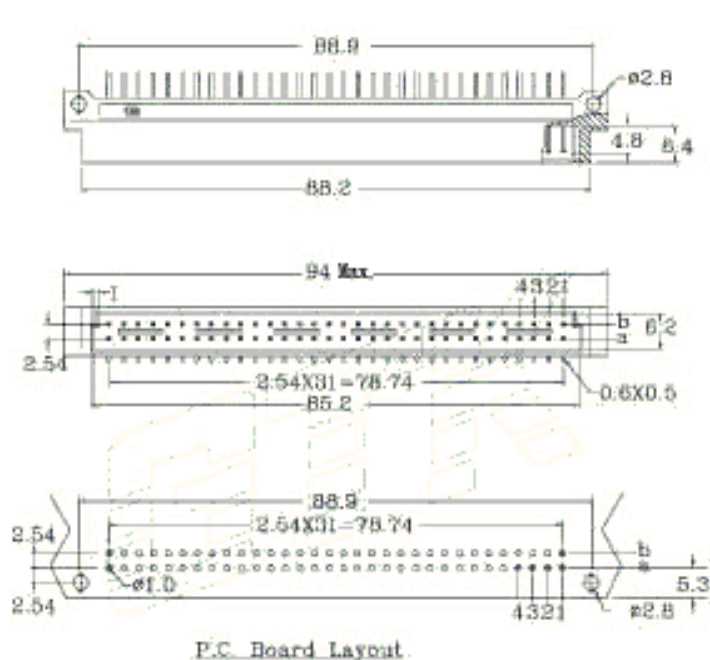

UNIT : mm

Series	Position	Rows with Contacts	Contact Arrange
D6 2.54mm	64	a b	4321
	32	a -	4321
D5 5.08mm	32	a b	4321
	16	a -	4321

Ordering Information

STANDARD DIMENSION : SHOW P/N END TO CODE #6

SPECIAL DIMENSION : KEEP SHOWING CODE #7-8 (PS. 標準碼為6碼, 第7-8碼視需要加註於標準碼後)

D6	M	64	R	T	1	+	B/L	/	10U
1	2	3	4	5	6	7	8		

1.SERIES NO (產品系列)

D6 = DIN41612 B TYPE PITCH:2.54MM
(塑膠二排,PITCH:2.54MM)

D5 = DIN41612 B TYPE PITCH:5.08MM
(塑膠二排,PITCH:5.08MM)

2.CONTACT TYPE (連接器類別):

M = MALE (公座)

3.POSITION (端子數):

D6 = 64,32

D5 = 32,16

4.SERIES TYPE (產品型式)

R = RIGHT ANGLE (插板式90°)

5.CONTACT PLATED (端子電鍍):

T = TIN PLATED ON TERMINAL &
GOLD PLATED ON CONTACT
(半金鍍)

G = ALL GOLD PLATED (全金)

6.PIN TYPE (端子型式):

1 = DIP TYPE

7.PARTS OPTION (附件選擇)

B/L = WITH BOARDLOCK (有魚叉)

8.SPECIAL TYPE (特殊規格)

10U = 10 μ " GOLD PLATED
ON CONTACT (鍍金10 μ "
PS-STANDARD IS GOLD FLASH
BLANK FOR STANDARD
(標準品不需標註)