


# D-SUB DIP 90° TYPE STAMPED PIN ( P.C.B. MOUNT WITH 7.2MM FOOTPRINT )

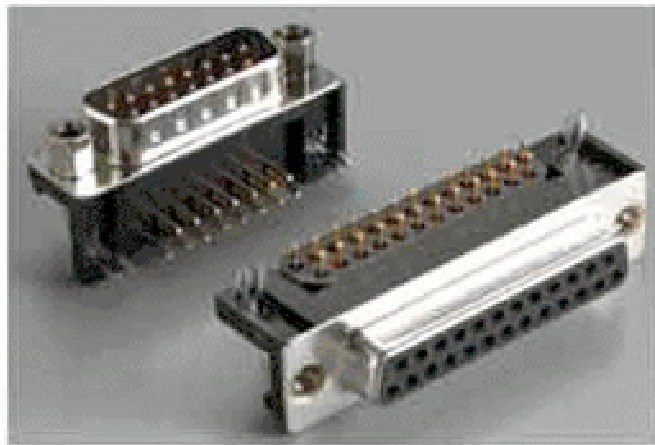


## SPECIFICATIONS :

- \*Contact Resistance : 30mΩ max. at DC 100mA
- \*Insulator Resistance : 1000MΩ min. at DC 500V
- \*Current Rating : 5 AMP

## DIELECTRIC WITHSTANDING :

- \*Voltage : AC 1000V For 1 minute
- \*Operating Temperature : -55°C ~ +105°C
- \*Contact : Brass or Phosphor Bronze
- \*Housing : PBT & 30% Glass Fiber (UL 94V-0)

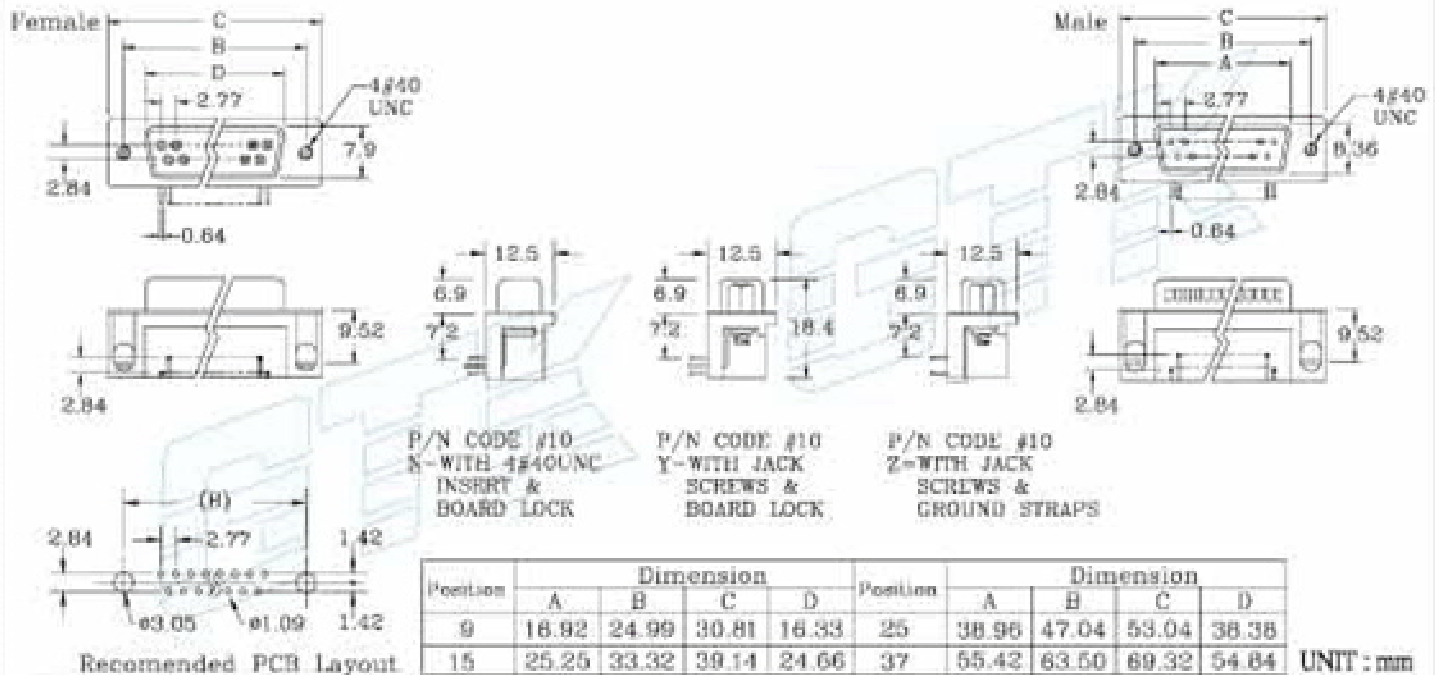

## Ordering Information

D	B	L	25	P	B	T	K	I	Y	S	E
1	2	3	4	5	6	7	8	9	10	11	12

- |                                                             |                                                                                                      |                                                                                                                                                                                                   |
|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.SERIES NO (產品系列):<br>D = D-SUB                            | 6.OPTION FOOTPRINT (到P.C.板的距離)<br>B = 7.2MM                                                          | 10.OPTION ON SCREWS (附件選擇)<br>N = WITH 4#40UNC INSERT & BOARD LOCK (有魚叉)<br>Y = WITH JACK SCREWS (4#40UNC) & BOARD LOCK (有六角母螺絲+魚叉)<br>Z = WITH JACK SCREWS (4#40UNC) & GROUND STRAPS (有六角母螺絲+地片) |
| 2.SHELL SIZE (外殼尺寸)<br>E = 09, A=15, B=25, C=37             | 7.SHELL PLATING (前殼鍍鍍):<br>T = TIN SHELL (鍍錫)<br>N = NICKEL (鍍鎳)                                     | 11.PIN TYPE (端子類別):<br>S = STAMPED PIN (沖壓端子)                                                                                                                                                     |
| 3.SERIES TYPE (產品型式)<br>L = RIGHT ANGLE (插板式90°)            | 8.INSULATOR COLOR (膠芯顏色):<br>K = BLACK (黑色)                                                          | 12.ADD PARTS (加附件)<br>E = EMI TYPE ONLY (鐵粉芯)                                                                                                                                                     |
| 4.NO. OF CONTACT (端子數):<br>09, 15, 25, 37                   | 9.SHELL TYPE (外殼類別):<br>1 = DIMPLE FOR SHELL (外殼壓花)<br>PS : MALE TYPE ONLY<br>2 = W/O DIMPLE (外殼無壓花) |                                                                                                                                                                                                   |
| 5.CONTACT TYPE (連接器類別):<br>P = MALE (公座)<br>S = FEMALE (母座) |                                                                                                      |                                                                                                                                                                                                   |