


公差表/General tolerances(mm)			
0	>3	>6	>10
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
>30	>18	>30	>50
~	~	~	~
50	80	120	180
±0.31	±0.37	±0.57	±0.80
>500	>120	>180	>250
~	~	~	~
400	500	~	~
±2.50	±2.20	±1.05	±1.15
±2	±2	±2	±2

PCB LAYOUT

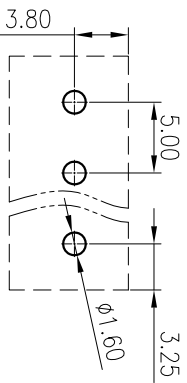

4	Pin	Copper alloy	Sn plated
3	Screw	Steel	M3/Zn plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B 300/15	C / D 300/10
额定电压/电涌/Rated Voltage(V)/Current(A)			
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree			III/2
额定电压/电涌/Rated Voltage(V)/Current(A)			250/22
工频耐压/Withstanding voltage(V/Min)			AC2000
螺丝扭矩/Torque Tightening(N·m/Lb·in)			M3, 0.5/4.43
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm/AWG)			2.5/22~12
间距/Pitch(mm)/线数范围/Poles			5.0/N=02~12P
剥线长度/Stripping length(mm)			6~7
使用温度范围/Operating temperature(°C)			-40~+105
符合环保要求/Conform to RoHS			Yes
MATERIAL:	SURFACE: /		

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD
 NAME: **DEGSON**
 APPD: LonChh 2020.05.26
 CHKD: YuJZ 2020.05.26
 DRFT: Song 2015.12.11
 DRAWING NO.: DG166-5.0-C03
DG166-5.0-XP-1Y-00A(H)
 TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1	2	3	4	5

SIZE:A4
 (mm)
 (inch)

REV	T1
1/1	