
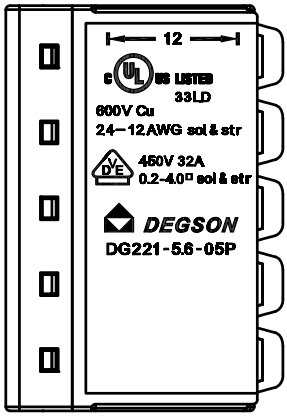
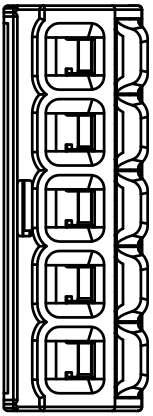
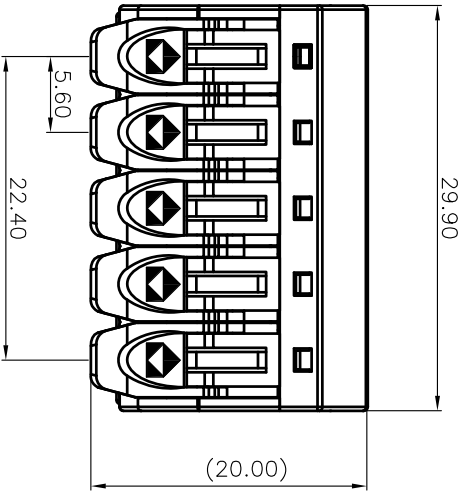


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

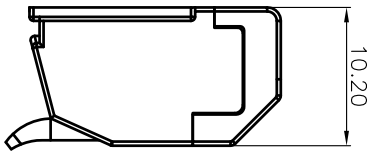

- NOTES1:
 UL Standard
 1. Rated voltage : 600V
 2. Wire range : 24~12AWG
- IEC Standard
 1. Rated voltage/current : 450V / 32A
 2. Wire range : 0.2~4.0mm²

- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.6mm, Poles : 05P
 3. Stripping length : 12mm
 4. Withstanding voltage : AC2500V/1Min
 5. Operating temperature : -40°C~+85°C
 6. Undimensioned tolerances:

Pitch range	in mm		Nominal dimension range		-	L
	Over	To	Over	To		
6	6	10	30	60	0.1/10	
10	10	24	30	60	150	<
24	24	30	60	100	150	
30	30	60	100	150	±1.30	±2°
60	60	100	150	±1.30		

7. RoHS Compliance

DG221 - 5.6 - 05P - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black)
 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1