

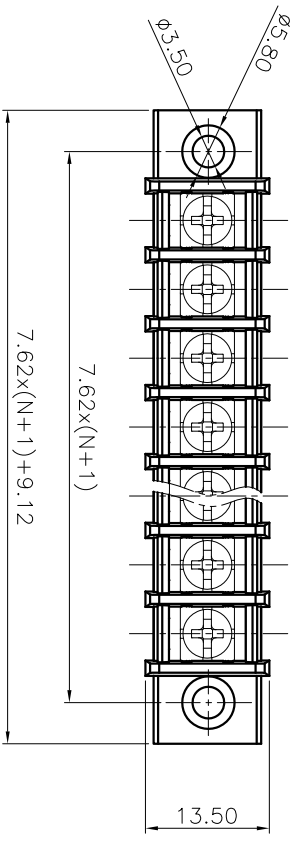



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

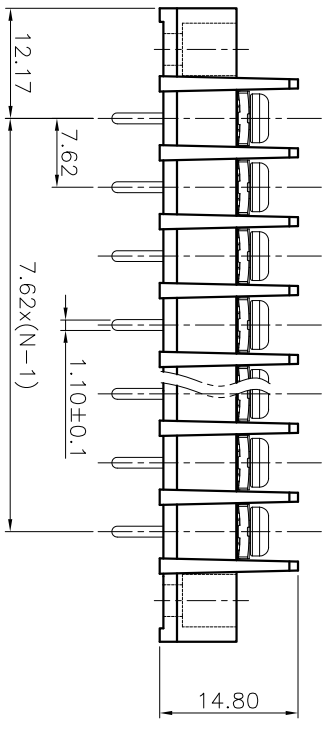



NOTES1:  
UL Standard  
1. Rated voltage/current : 300V / 15A  
2. Torque value : M3 , 4.43Lb.in  
3. Wire range : 22~14AWG

NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 7.62mm, Poles : N=02~24P  
3. Withstanding voltage : AC1600V/1Min  
4. Operating temperature: -40°C~+105°C  
5. Undimensioned tolerances:



Pitch range	in	mm	Over	Over	Over	Over	Over	Over
6	10	TO	TO	30	60	100	150	0.1/10
10	24	TO	TO	30	60	100	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

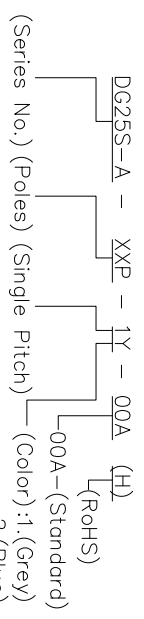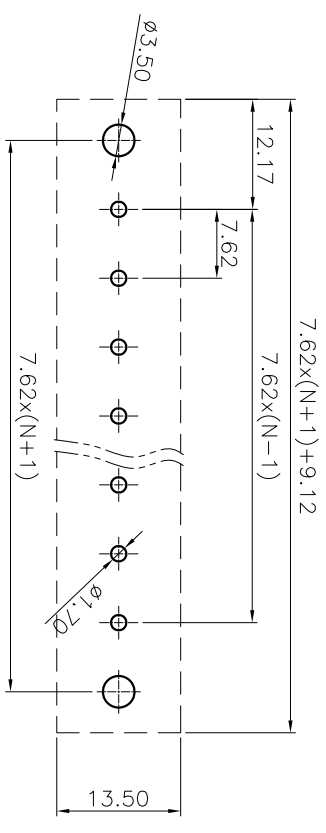

- (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)  
2.(Blue)  
3.(Black)  
4.(Green)  
5.(Orange)  
6.(Red)  
7.(Transparent)  
8.(Yellow)  
9.(White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	<b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1

A B C D E F G H

8

7

6

5

4

3

2

1

PCB LAYOUT