
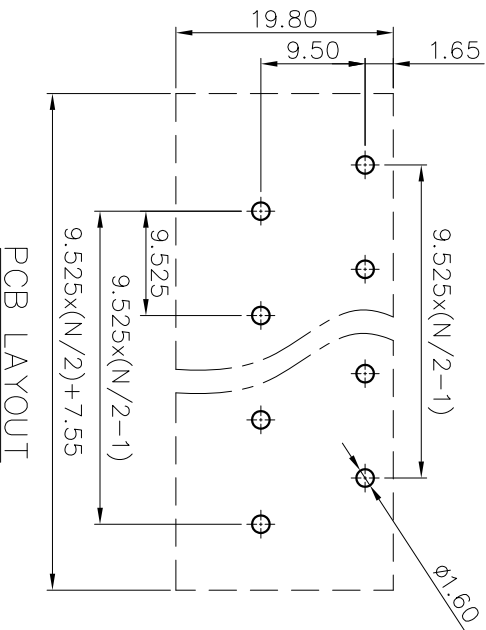
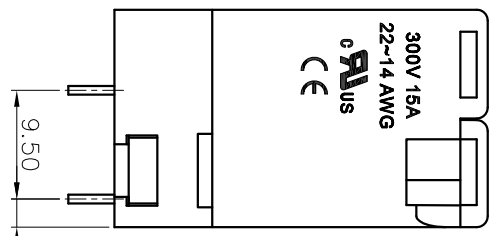
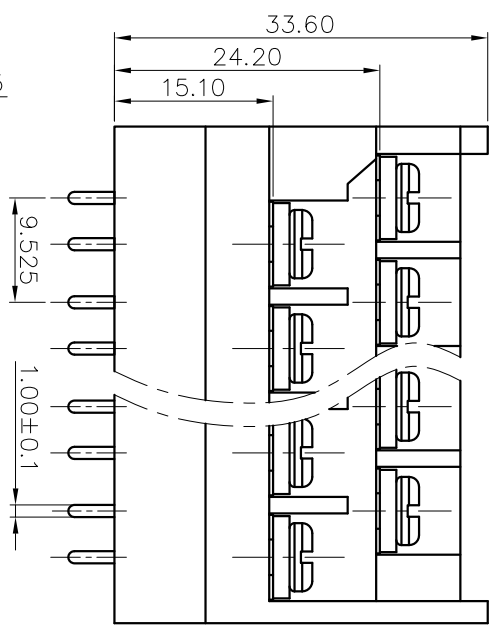
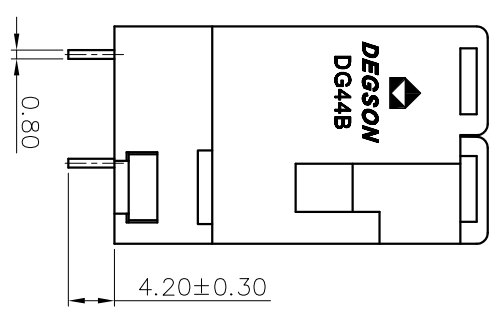


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

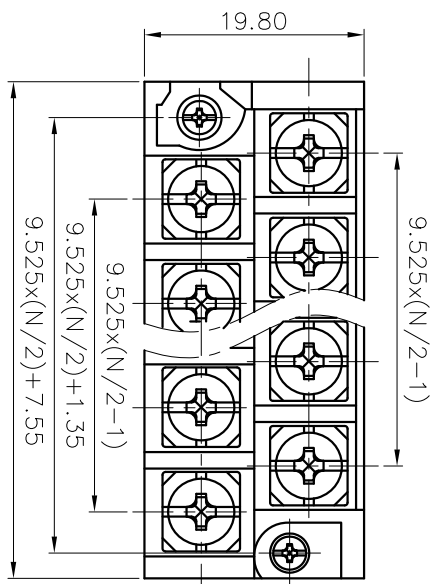


NOTES1:  
 UL Standard  
 1. Rated Voltage/Current : 300V / 15A  
 2. Torque Value : M3.5, 7.03lb.in  
 3. Wire Range : 22~14AWG

NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 9.525mm, Poles : N=10~36P  
 3. Withstanding Voltage : AC1600V/1Min.  
 4. Operating temperature: -40°C~+105°C  
 5. Undimensioned Tolerances:

Pitch range	In		mm		Over	Over	Over	Over	Over
	mm	In	mm	In					
6	10	TO	30	TO	60	TO	100	TO	150
10	10	TO	30	TO	60	TO	100	TO	150
24	30	TO	60	TO	100	TO	150	TO	±2*
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±2*

6. RoHS Compliance

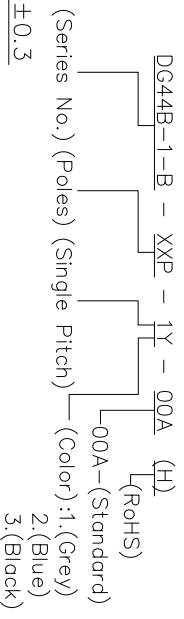

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS	
PART NO.:	/
APPRD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	<b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1