

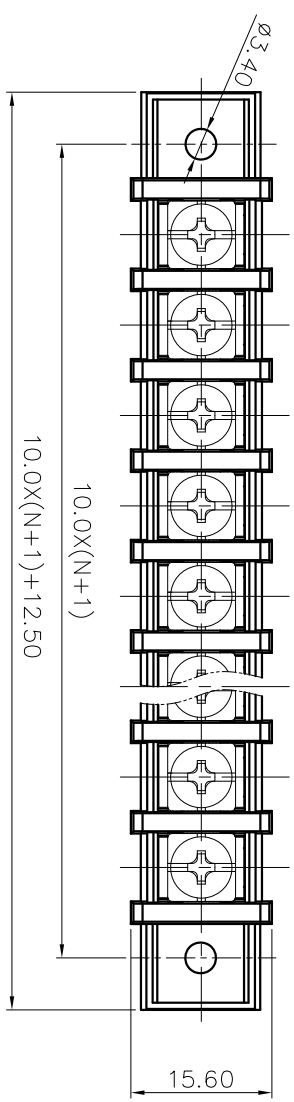



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE


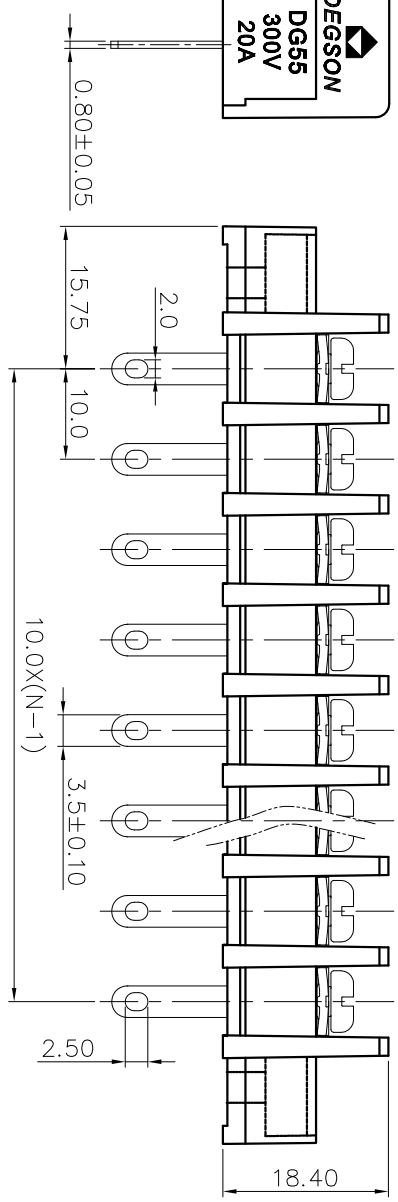


- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 20A
2. Torque value : M4 , 10.53lbf.in
3. Wire range : 22~12AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.0mm, Poles : N=02~24P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:



Pitch range	in	mm	Nominal dimension	range	in	mm	tolerance
Over	6	10	30	Over	60	100	150
TO	10	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	±2°
±0.15±0.20		±0.30±0.30		±0.50±0.70		±1.00±1.30	

6. RoHS Compliance

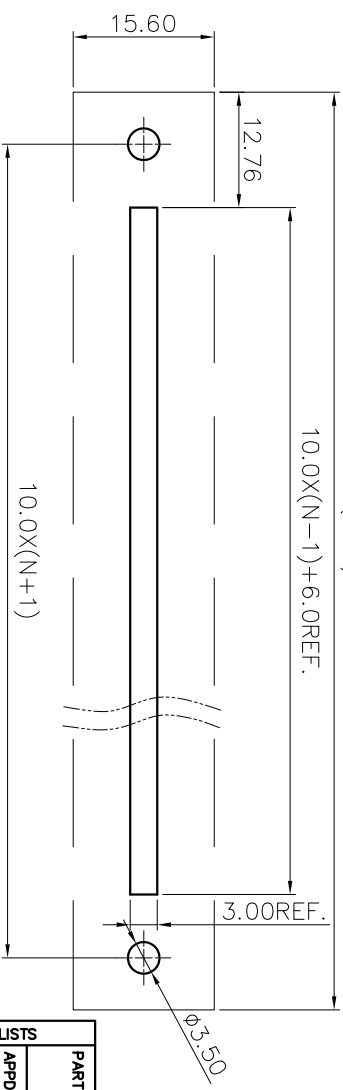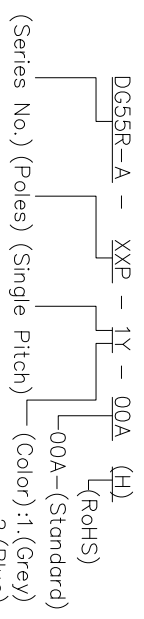

- 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS

PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	CHKD:	DG55R-A-XXP-1Y-00A(H)	
DRFT:	/	TITLE:	CUSTOMER DRAWING	REV
THIRD ANGLE PROJECTION		DRAWING NO.:	/	SHEET
		SCALE	DO NOT SCALE DRAWING	1:1