
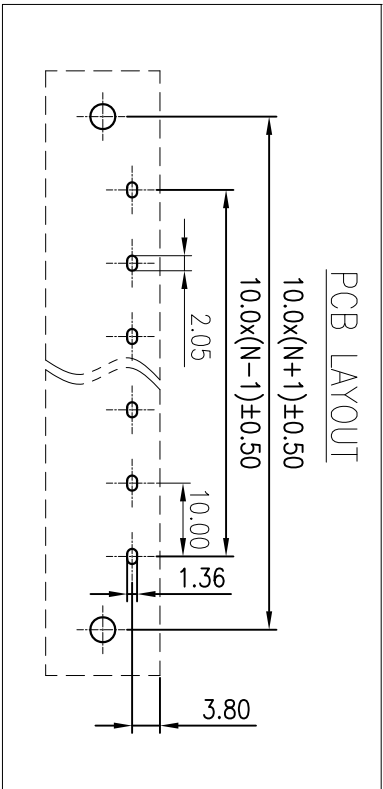

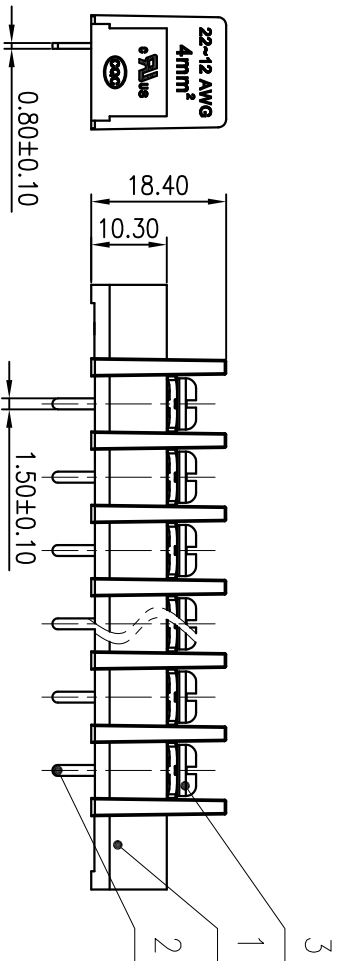


| 公差/General Tolerances(mm) | 0 | >3 | >6 | >10 | >18 | >30 | >50 | >80 | >120 | >180 | >250 | >315 | >400 | 0.1/10 |
|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.47 | ±0.57 | ±0.80 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 | ±Z |

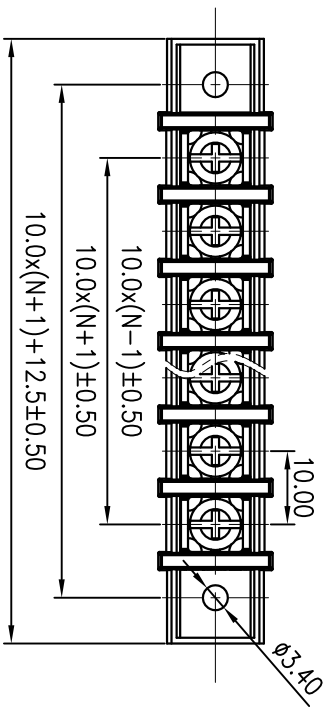

| 3 | Screw | Steel | Ni Plated |
|---|--------------|--------------|-----------|
| 2 | Pin header | Copper alloy | Sn Plated |
| 1 | Housing | PA66 | UL94V-0 |
| ITEM | NAME OF PART | MATERIAL | NOTES |
| UL 标准/UL Standard: B C D | | | |
| 额定电压/电流/Rated Voltage(V)/Current(A) 300/20 300/20 300/10 | | | |
| EC 标准/EC Standard: | | | |
| 过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2 | | | |
| 级/ Pollution Degree | | | |
| 额定电压/电流/Rated Voltage(V)/Current(A) 600/32 600/32 1000/32 | | | |
| 额定脉冲电压(KV)/Rate Impulse Voltage(KV) 6 6 6 | | | |
| 额定扭矩/Torque Tightening(N·m/Lb·in) M4, 1.2/10.53 | | | |
| 线径范围/导线/ Wire Range(flexible)(AWG) 22~12 | | | |
| 使用温度范围/Operating temperature(°C) -40~+105 | | | |
| 符合RoHS环保要求/Conform to RoHS Yes | | | |

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: WU NK 2020.5.26

DRAWING NO.: DG55S-C03

TYPE: CUSTOMER DRAWING

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG55S-A-XXP-1Y-00A(H)

| | | | | |
|-----|-----|-------------|-------|------|
| REV | ECN | DESCRIPTION | DRAFT | DATE |
| | | | | |