





DEGSON ELECTRONICS CO., LTD.

Product Specification

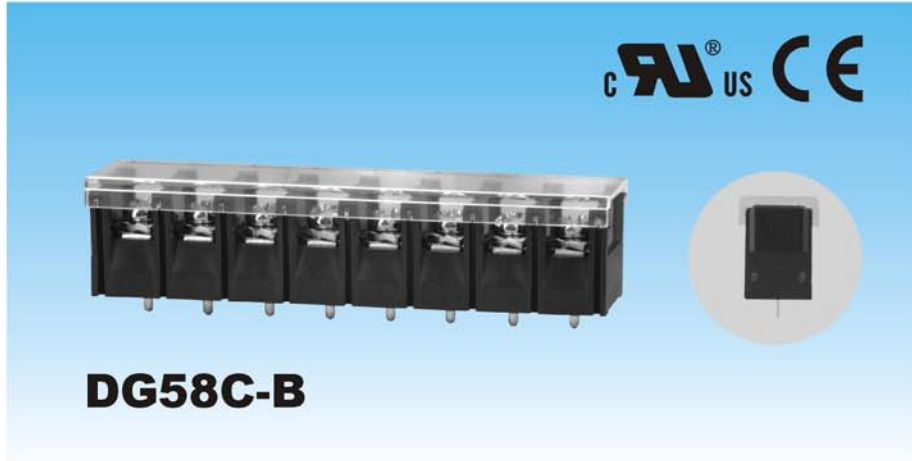

DG58C-B

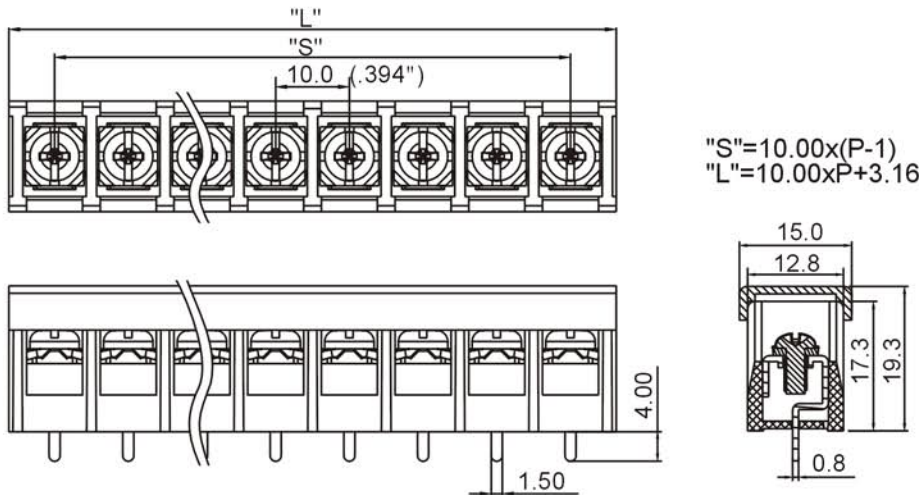

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.16	33.16	43.16	53.16	63.16	73.16	83.16	93.16	103.16	113.16	123.16	133.16	143.16	153.16
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	163.16	173.16	183.16	193.16	203.16	213.16	223.16	233.16	243.16	253.16	263.16			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			

Materials	
Housing:	PA66+23%GF, UL 94V-0
Terminal:	Brass,0.8t,Tin-Plated
Screw:	Steel,M4 Ni-Plated
Capability	
Rated:	300V / 20A
Temp.Range:	-40°C~+105°C
Withstand Voltage:	AC2000V / 1Min
Insulation Resistance:	500MΩ / DC500V
Wire Range:	22-12AWG
Max.Torque Value:	1.2N.m 10.6Lb.in

HOW TO ORDER:



Series No. No. of Pole

Color

1 Gray	5 Orange	9 White
2 Blue	6 Red	
3 Black	7 Trans-parent	
4 Green	8 Yellow	

	DEGSON ELECTRONICS CO.,LTD.
	NAME DG58C-B