

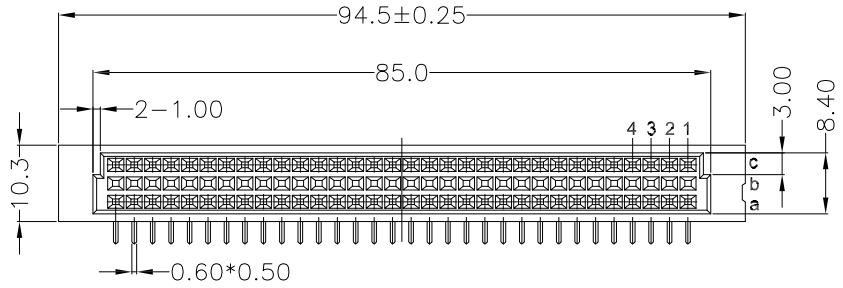


**SPECIFICATION**  
**MATERIAL**  
 Housing:PBT+5%PC UL94V-0  
 Contacts:PhosPhor Bronze

**ELECTRICAL**  
 Current rating: 2 Amps .  
 Contact resistance: 20 mohms initial  
 Insulation resistance: 100000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC / minute  
 Operating temperature: -55° C TO +125° C

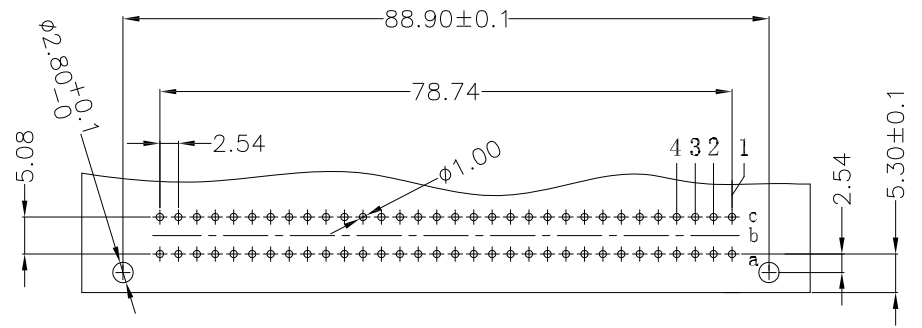

**NEW PART NUMBER**

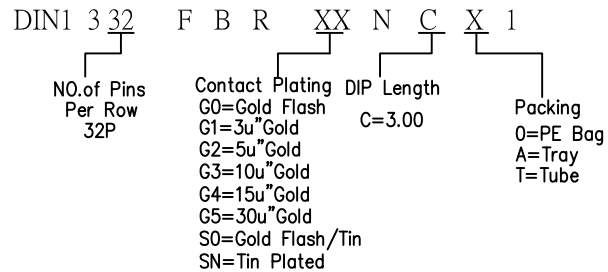

PCB LAYOUT(RECOMMENDED)  
 (TOP VIEW TOL. :±0.05)

				OPERATION		DRAW	Helen	2011/04/18
				X.X	±0.40	DESIGN	Jenny	2011/04/18
				X.XX	±0.25			
				X.XXX	±0.15	CHECK	Franck	2011/04/18
				Angle	±3°			
A0	2011/04/18	NEW		DIM	TOL	APPROVE	Steven	2011/04/18
REV	DATE	MODIFICATION DESCRIPTION		CHANGE				

**LPI** 深圳市起德电子科技有限公司  
 SHEN ZHEN QIDE ELECTRONIC TECHNOLOY CO.,LTD

PART NO.	DIN1-332FBRXXNCX1	UNIT	mm
TITLE	欧式插座DINI 96P 母弯 A+C空中排	SCALE	1:1
Customer NO.	---	SHEET	1/1
		PROJ.	