






SPECIFICATIONS

Current Rating: 3AMPS
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -40°C to +105°C

MATERIAL

Contact: Brass
 Insulator: PBT, UL94V-0

ORDER INFORMATION

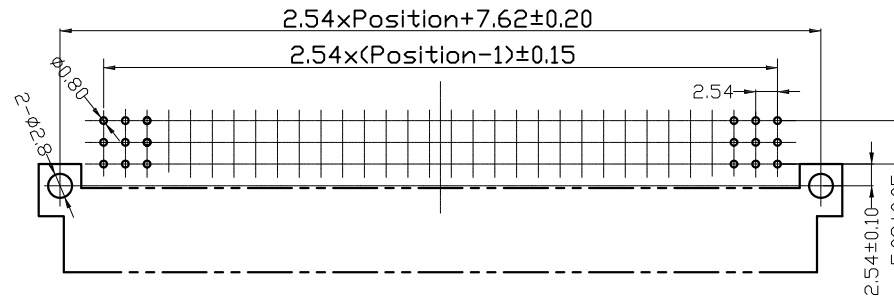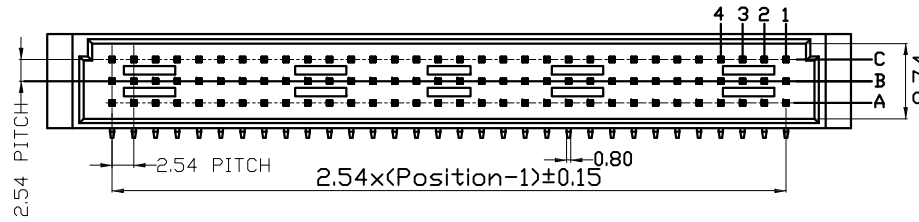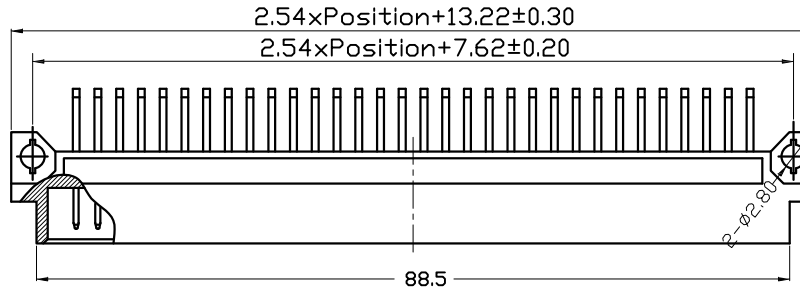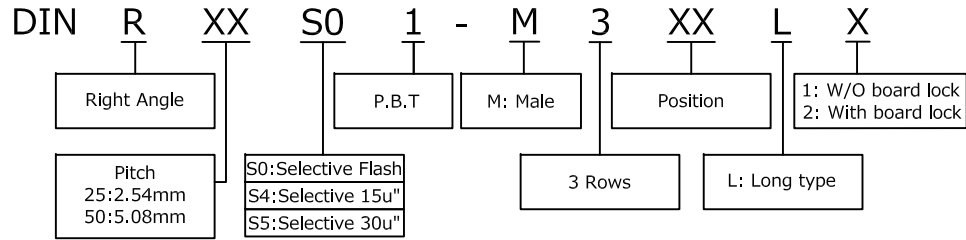

P.C.B. LAYOUT (BOTTOM VIEW)

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	A B C	
	64A	A - C	
	64B	A B -	
5.08mm	32	A - -	
	48	A B C	
	32A	A - C	
	32B	A B -	
	16	A - -	

Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	DINRXXS01-M3XXLX	DRAWN	Andrew
DRAWING NO.	DINRXXS01-M3XXLX	CHECKED	Claudia
DATE	2018/12/03	APPROVED	Brian
		Changed 3.0mm to 3.5mm	
		2022/10/27	

TITLE:	DIN 41612 C TYPE MALE	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.		DESCRIPTION	DATE
--------	-----------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	--	-------------	------