
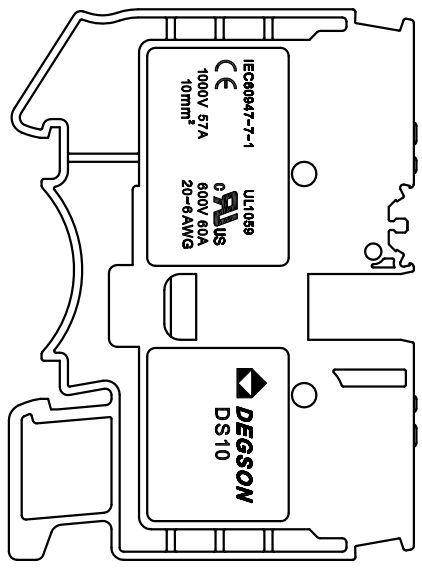
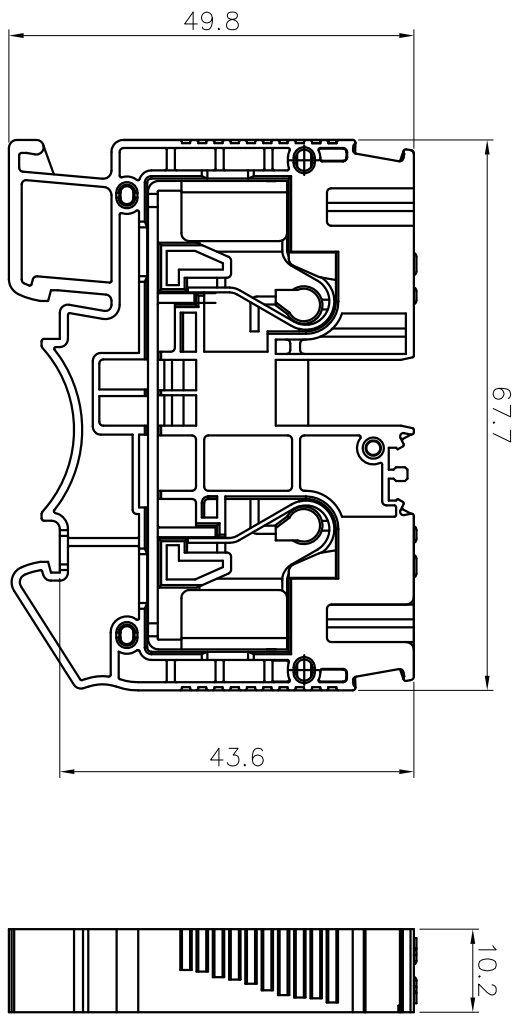


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE



DS10 - 01P - 1Y - 00A (H)
 (Series No.)(Poles) (Single Pitch) (Color) :1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

NOTES1:

- 1. Rated voltage/current : 600V / 60A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Wire range : 20~6AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 10.2mm, Poles : N=01P
- 3. Stripping length : 16~18mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

IEC Standard	1.
Pollution degree	3
Over-voltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	1000V
Rate current(A)	41A

Pitch Range	In mm	Nominal Dimension	Range	mm
Over	6	Over	30	Over
TO	10	TO	60	TO
6	10	24	30	80
			80	100
			100	150
			100	150
			±0.50	±0.30
			±0.30	±0.50
			±0.70	±1.00
			±1.30	±2*

2. Wire range : 0.5~10mm²&16mm²(sol)

6. RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1